

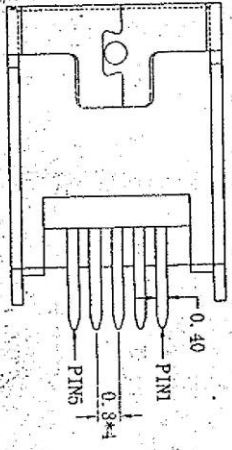

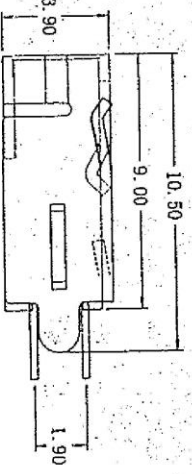


①

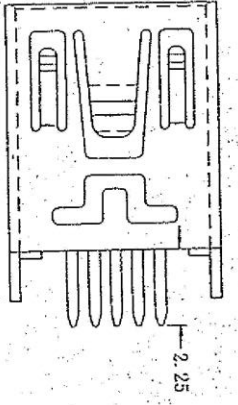

RECOMMENDED PCB LAYOUT

特性: Specifications:  
电绝缘: Electrical:  
接触电阻: Contact Resistance  
50 milliohms MAX

耐压: Dielectric Withstanding Voltage:  
100 V AC AT Sea Level

绝缘电阻: Insulation Resistance:  
100 MEGA ohms MIN

材料: Material:  
塑胶: Housing: High Temperature Thermoplastics,  
UL 94V-0 耐高温塑胶  
端子: Contact: Copper Alloy 铜合金  
铁壳: Shell: Copper Alloy 铜合金

电镀: Finish: Plated Gold in Mating Area;  
Tin On Solder Falls  
接触点镀金: 脚镀锡

铁壳: Shell: Nickel/Plating 镀镍

Ordering Informating  
X - 5 XX

Plastic Color  
AsBlack

Contact plating  
01-Gold Flash  
02-5u Gold/ Tin  
03-15u Gold/ Tin  
04-30u Gold/ Tin

品名	MINI USB B TYPE SP	材质		单位	MM
型号	A004-2B-5D-1	图纸编号		比例	1:1
制图		审核		日期	2005.02