

产品规格书

批 准	审 核	校 核	编 制
朴雨根	纪春华	朴致均	郑羿
2018.03.28	2018.03.28	2018.03.28	2018.03.28

规格书更改履历:

序号	更改内容	履历号	更改时间	责任人
1	新规制定	000	2018.03.28	郑羿

Descriptions

- General purpose application
- Switching application

Features


- Low Leakage current
- Low collector saturation voltage enabling low voltage operation
- Complementary pair with KBT2907AC

Ordering Information

Type NO.	Marking	Package Code
KBT2222AC	1P  • ① ②	SOT-23

①Device Code ② Year& Week Code • Dalian

PIN Connection

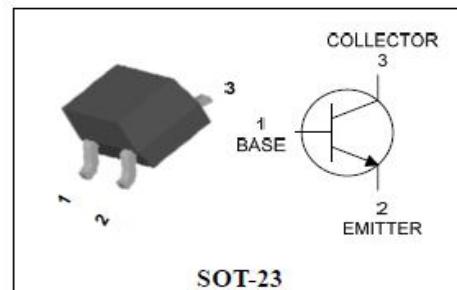

Absolute maximum ratings

T_a=25°C

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	V _{CBO}	75	V
Collector-Emitter voltage	V _{CEO}	40	V
Emitter-Base voltage	V _{EBO}	5	V
Collector current	I _c	0.6	A(DC)
	I _{CP} [*]	1.2	A(Pulse)
Collector dissipation	P _C ^{**}	350	mW
Junction temperature	T _j	150	°C
Storage temperature range	T _{stg}	-50~150	°C

: Single pulse, tp= 300 μs

** : Package mounted on 99.5% alumina 10 8 0.6mm

Thermal Characteristics

Characteristic	Symbol	Ratings	Unit
Thermal resistance Junction-Ambient	R _{th(J-A)} ^{**}	357	C/W
Thermal resistance Junction-Case	R _{th(J-C)} ^{**}	200	C/W

** : Package mounted on 99.5% alumina 10 8 0.6mm

Electrical Characteristics

Ta=25 °C

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base breakdown voltage	BV _{CBO}	I _C =10uA, I _E =0	75	-	-	V
Collector-Emitter breakdown voltage	BV _{CEO}	I _C =1mA, I _B =0	40	-	-	V
Emitter-Base breakdown voltage	BV _{EBO}	I _E =10uA, I _C =0	5	-	-	V
Collector cut-off current	I _{CBO}	V _{CB} =75V, I _E =0	-	-	20	nA
Collector cut-off current	I _{CEX}	V _{CE} =30V, V _{EB} =0.5V	-	-	50	nA
DC current gain	h _{FE}	V _{CE} =10V, I _C =10mA	100	-	-	-
Collector-Emitter saturation voltage	V _{CE(sat)}	I _C =150mA, I _B =15mA	-	-	0.4	V
Transition frequency	f _T	V _{CE} =20V, I _C =20mA, f=100MHz	250	-	-	MHz
Collector output capacitance	C _{ob}	V _{CB} =10V, I _E =0, f=1MHz	-	-	8	pF
Delay time	t _d	V _{CC} =30V _{dc} , V _{BE(off)} =0.5V _{dc} , I _C =150mA _{dc} , I _{B1} =15mA _{dc}	-	-	10	ns
Rise time	t _r		-	-	25	ns
Storage time	t _s	V _{CC} =30V _{dc} , I _C =150mA _{dc} , I _{B1} =I _{B2} =15mA _{dc}	-	-	225	ns
Fall Time	T _f		-	-	60	ns

Electrical Characteristic Curves

Fig. 1 $P_C - T_a$

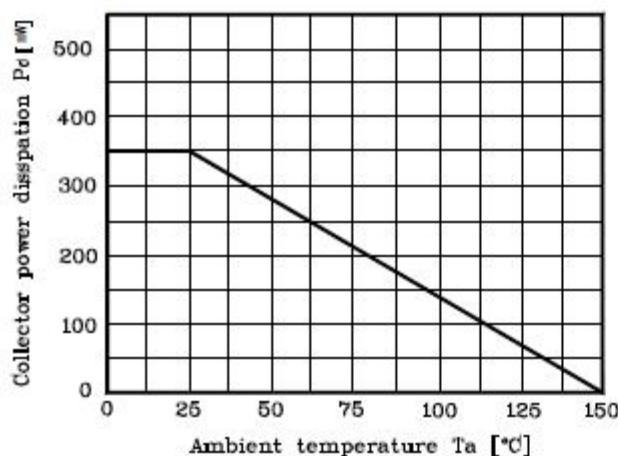


Fig. 2 $h_{FE} - I_C$

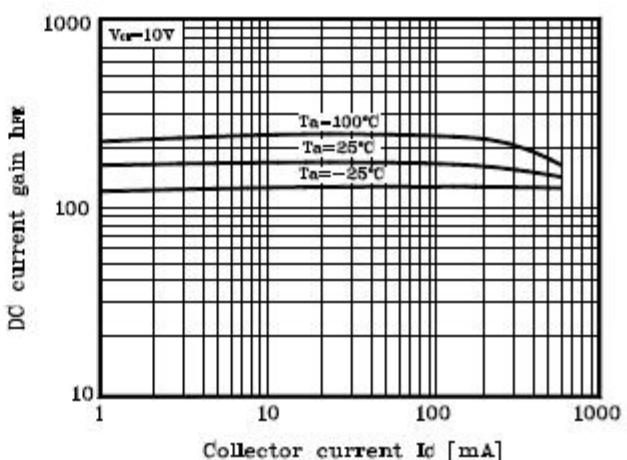


Fig. 3 $I_C - V_{CE(SAT)}$

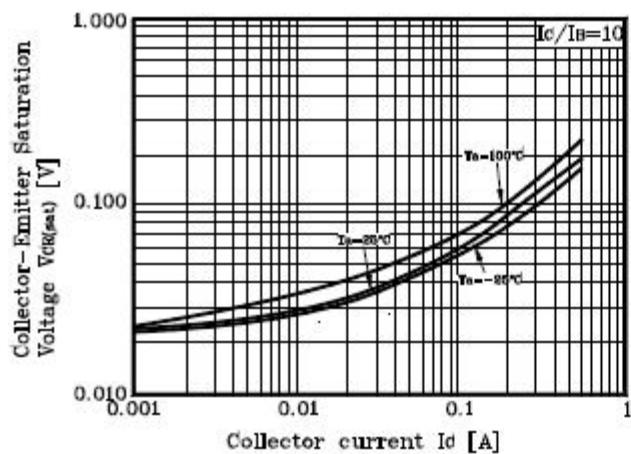


Fig. 4 $I_C - V_{BE(SAT)}$



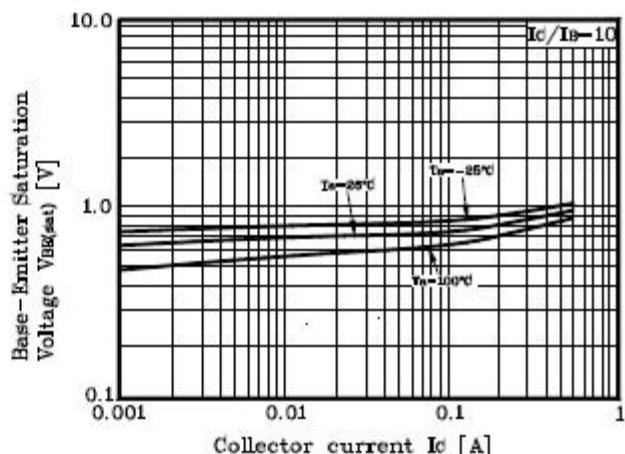


Fig. 5 $C_{ob} - V_{CB}$

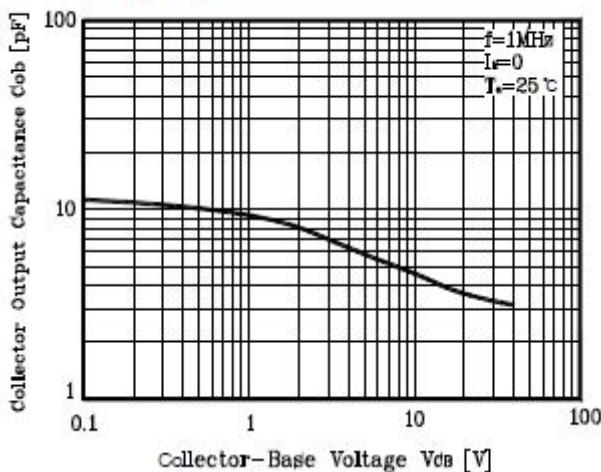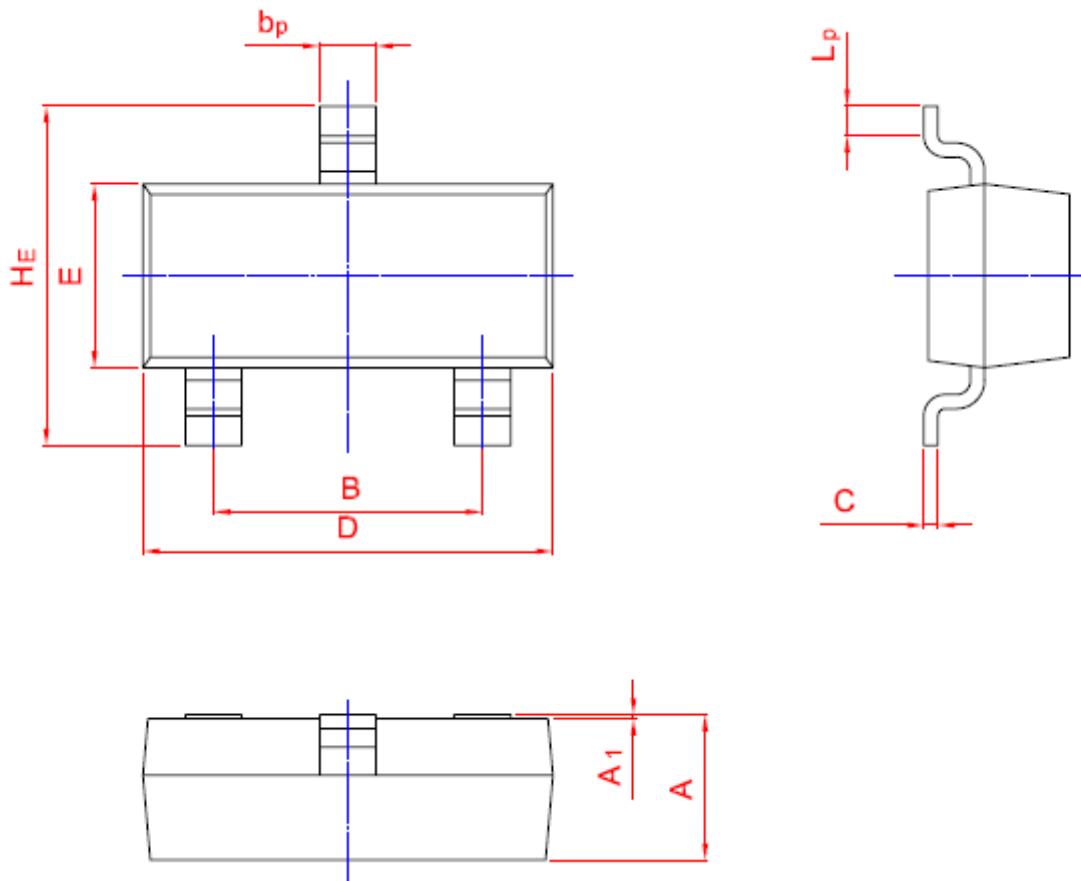

Outline Dimension (Unit: mm)

UNIT	A	B	b_p	C	D	E	H_E	A_1	L_p
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20

The AUK Dalian Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Dalian Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Dalian Corp. cannot accept liability to any damage which may occur in case these AUK Dalian Corp. products were used in the mentioned equipments without prior consultation with AUK Dalian Corp..

Specifications mentioned in this publication are subject to change without notice.