
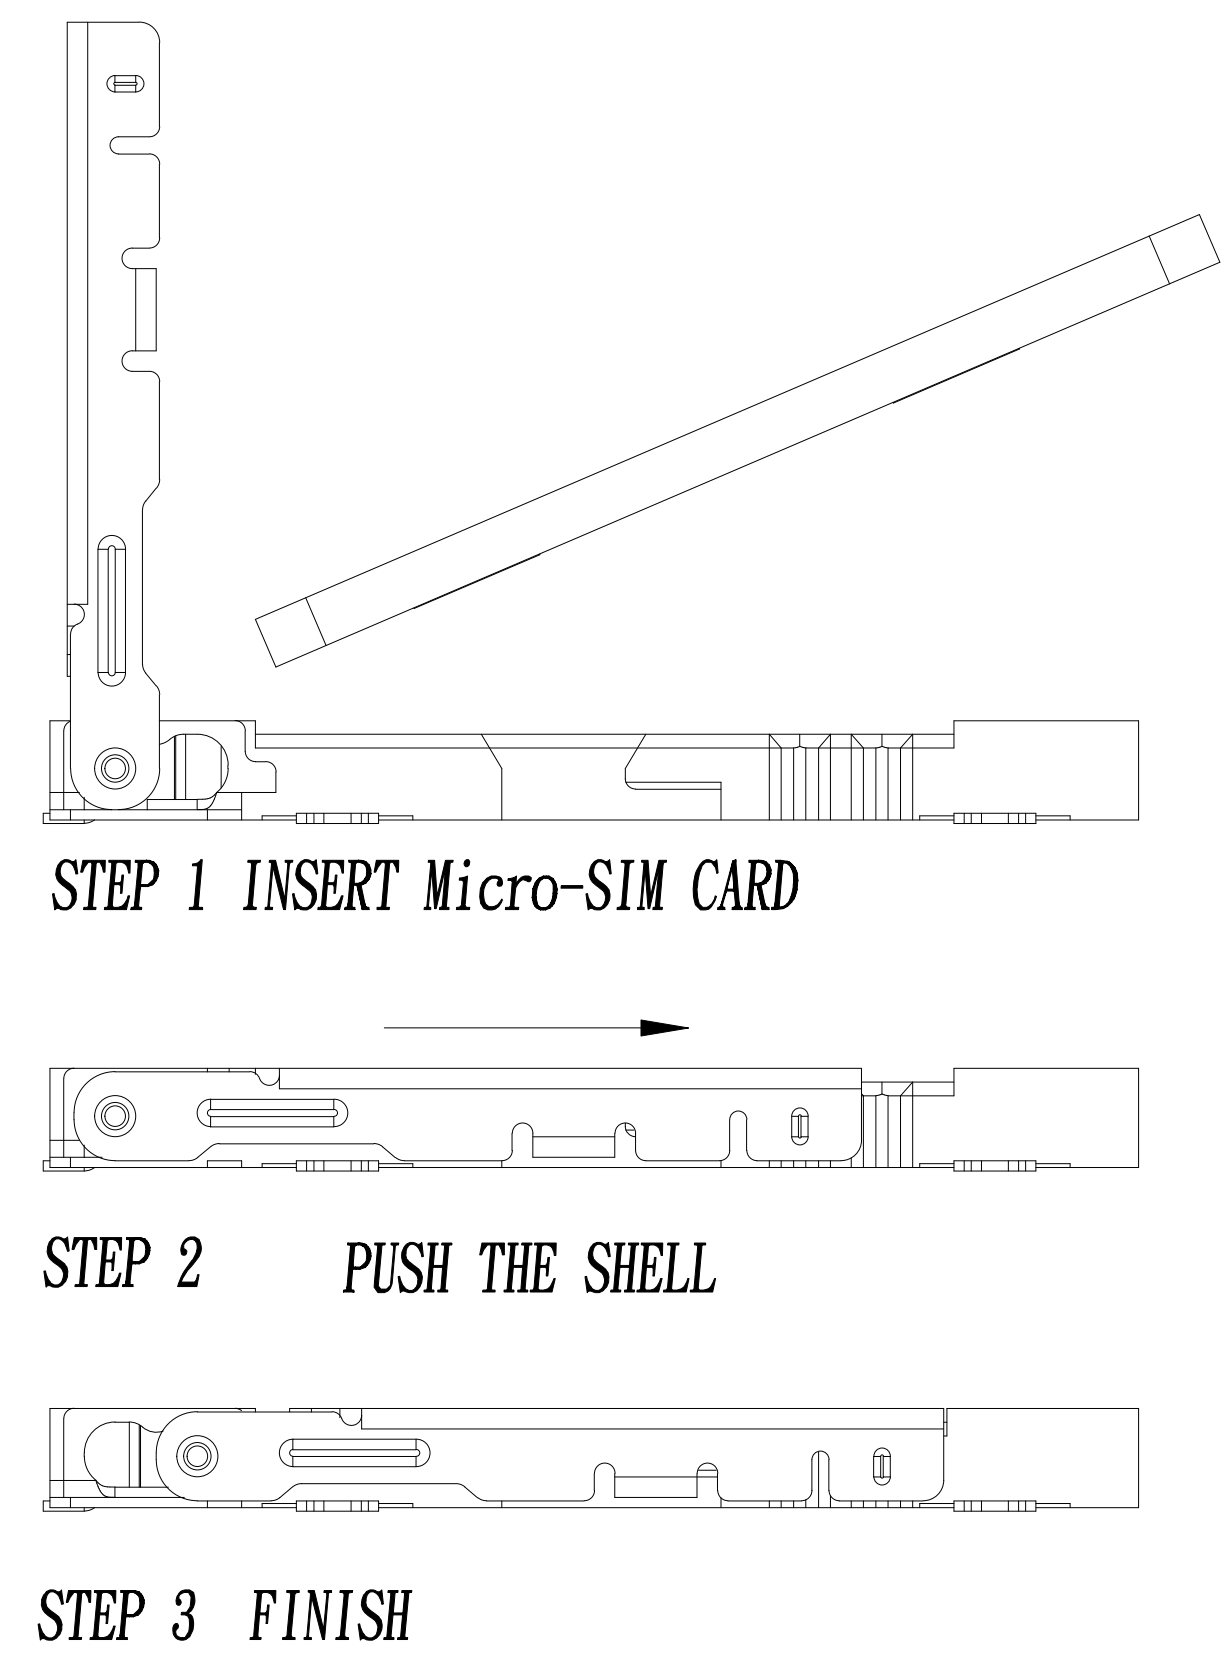


- NOTES:
- ELECTRICAL CHARACTERISTICS
 - CONTACT RESISTANCE: 60 Milliohms Max
 - INSULATION RESISTANCE: 1,000 Megohms Min.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - MECHANICAL CHARACTERISTICS
 - OPERATION TEMPERATURE RANGE: -25°C+70°C
 - DURABILITY: 5000 CYCLES
 - MATERIAL:
 - HOUSING: THERMOPLASTIC, UL 94-V0
 - TERMINAL: PHOSPHOR BRONZE, T=0.15
 - SHELL: STAINLESS STEEL, T=0.15
 - FINISHED:
 - TERMINAL: Ni PLATED UNDER, Au PLATED ON CONTACT AREA, G/F PLATED ON SOLDER TAIL

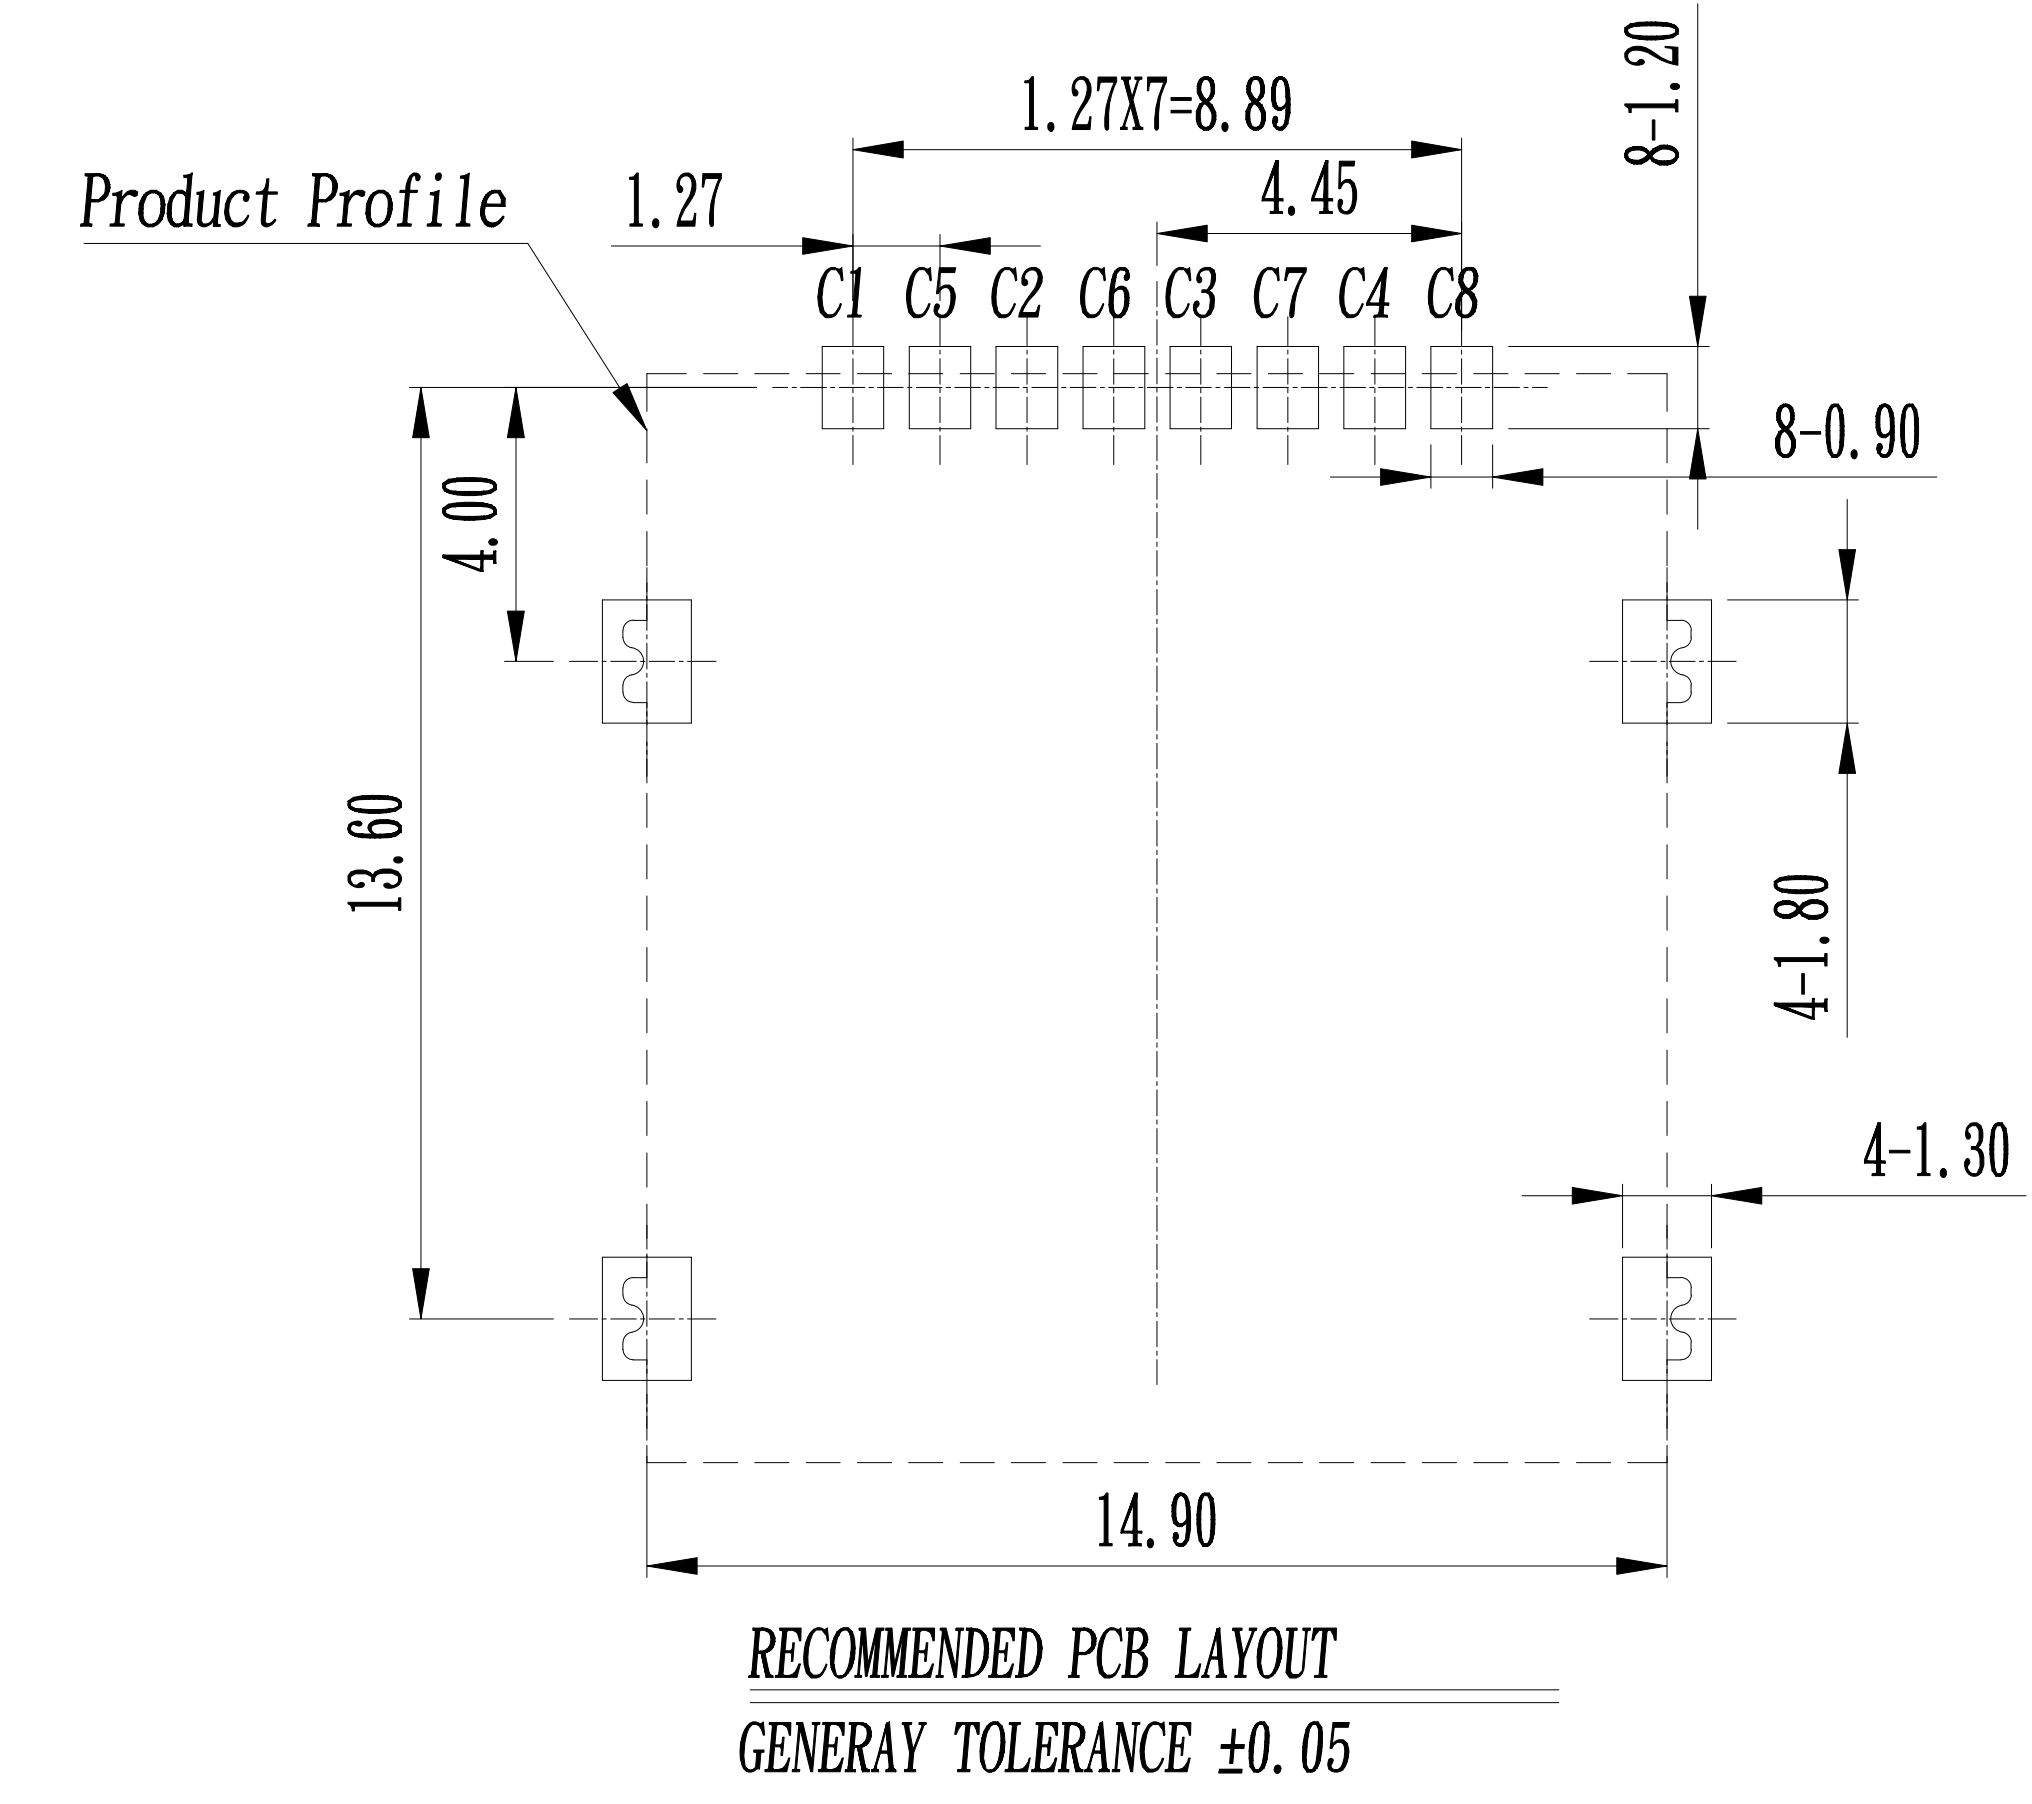

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED
	A	14'/01/06	NEW RELEASE			
工程变更通知单号	版次	日期	说明	改变	承认	GENERAL TOLERANCE UNLESS OTHERWISE NOTED
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	

东莞市汉博电子科技有限公司			
E	PRODUCT SPEC. MICRO SIM		
PART NO.		MICRO SIM H15 8PIN	
TITLE:		SNO-1340	
FILE NAME.			
SCALE	1:1	UNIT:mm	A4 SHEET: 1 of 1