

HSF RoHS **PAI** us **CE**

SPECIFICATIONS

Rated(额定参数): 300V,1.5A
 Dielectric strength(抗电强度): AC2000V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Nut(螺母): Brass (黄铜)
 Contact(端子): Brass, Tin plating(黄铜镀锡)

PITCH RANGE		NOMINAL DIMENSION RANGE	
IN MM		IN MM	
OVER	OVER	OVER	OVER
TO	TO	TO	TO
6	10	30	60
10	24	60	100
±0.10	±0.15	±0.25	±0.30
		±0.30	±0.50
		±0.70	±1.00

Ordering Information

JL2EDGVM-XXX XX G X 1





Pitch
500=5.0PH
508=5.08PH

No.of pins
2P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bog
T=Tube
A=Troy

Recommended P.C.B Layout(Top Side)

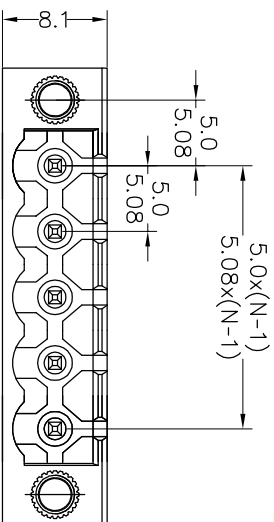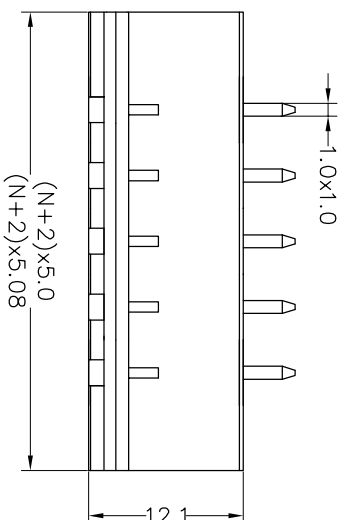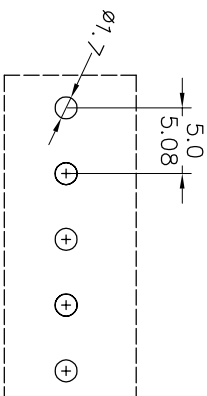

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	OPERATION	SCALE	FIT	PART NO.	TITLE:
A0	2018.12.24	NEW DRAWING		Angle	±3°	APPROVE	±0.20	A4	1/1	JL2EDGVM-500(508)XXGX1	5.00/5.08mm Pitch Male Pluggable Terminal Blocks
1							±0.30				
							±0.20				
							±0.10				

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992