


Current Transducer HXN 03 .. 50-P

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



$I_{PN} = 3 \dots 50 \text{ A}$

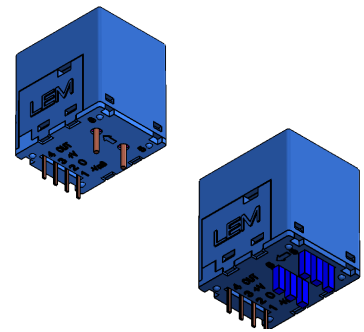

Electrical data

Type	Primary nominal current rms I_{PN} (A)	Primary current, measuring range I_{PM} (A)	Primary conductor diameter x turns (mm)
HXN 03-P	3	± 9	0.6 d x 20 T
HXN 05-P	5	± 15	0.8 d x 12 T
HXN 10-P	10	± 30	1.1 d x 6 T
HXN 15-P	15	± 45	1.4 d x 4 T
HXN 20-P	20	± 60	1.6 d x 3 T
HXN 25-P	25	± 75	1.6 d x 2 T
HXN 50-P	50	± 150	1.2 x 6.3 x 1 T

V_{OUT}	Output voltage (Analog) @ $\pm I_{PN}$, $R_L = 10 \text{ K}\Omega$, $T_A = 25^\circ\text{C}$	± 4	V
R_L	Load resistance	≥ 10	$\text{K}\Omega$
R_{OUT}	Output internal resistance	< 50	Ω
V_C	Supply voltage ($\pm 5\%$) ¹⁾	± 15	V
I_C	Current consumption	$< \pm 15$	mA

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , $T_A = 25^\circ\text{C}$ (excluding offset)	$< \pm 1$	% of I_{PN}
ϵ_L	Linearity error ($0 \dots \pm I_{PN}$)	$< \pm 1$	% of I_{PN}
V_{OE}	Electrical offset voltage @ $T_A = 25^\circ\text{C}$	$< \pm 40$	mV
V_{OH}	Hysteresis offset voltage @ $I_p = 0$, after an excursion of $1 \times I_{PN}$	≤ 15	mV
TCV_{OE}	Temperature coefficient of V_{OE}	$< \pm 1.5$	mV/K
TCV_{OUT}	Temperature coefficient of V_{OUT} (% of reading)	± 0.1	%/K
t_r	Response time to 90 % of I_{PN} step	≤ 3	μs
BW	Frequency bandwidth (-3 dB) ²⁾	50	kHz

General data

T_A	Ambient operating temperature	- 25 .. + 85	$^\circ\text{C}$
T_S	Ambient storage temperature	- 25 .. + 85	$^\circ\text{C}$
m	Mass	8	g
	Standards	EN 50178: 1997	

Notes: ¹⁾ Also operate at $\pm 12 \text{ V}$ power supplies, measuring range reduced to $\pm 2.5 \times I_{PN}$

²⁾ Small signal only to avoid excessive heating of the magnetic cores.

Features

- Galvanic isolation between primary and secondary circuit
- Hall effect measuring principle
- Isolation voltage 3000 V
- Low power consumption
- Extended measuring range ($3 \times I_{PN}$)
- Power supply from ± 12 to $\pm 15 \text{ V}$
- Isolation plastic case recognized according to UL 94-V0.

Advantages

- Low insertion losses
- Easy to mount with automatic handling system
- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference.

Applications

- AC variable speed drives
- DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Electrical appliances.

Application domain

- Industrial.

Current Transducer HXN 03 .. 50-P

Isolation characteristics

V_d	Rms voltage for AC isolation test, 50 Hz, 1 min	> 3	kV
\hat{V}_w	Impulse withstand voltage 1.2/50 μ s	≥ 6	kV
V_e	Partial discharge extinction voltage rms @ 10 pC	≥ 1	kV
		Min	
dCp	Creepage distance	5.5	mm
dCI	Clearance distance	5.5	mm
CTI	Comparative Tracking Index (group I)	600	

Applications examples

According to **EN 50178** and **IEC 61010-1** standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
dCp, dCI, \hat{V}_w	Rated isolation voltage	Nominal voltage
Basic insulation	600 V	600 V
Reinforced insulation	300 V	150 V

Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

Dimensions HXN 03 .. 50-P (in mm.)

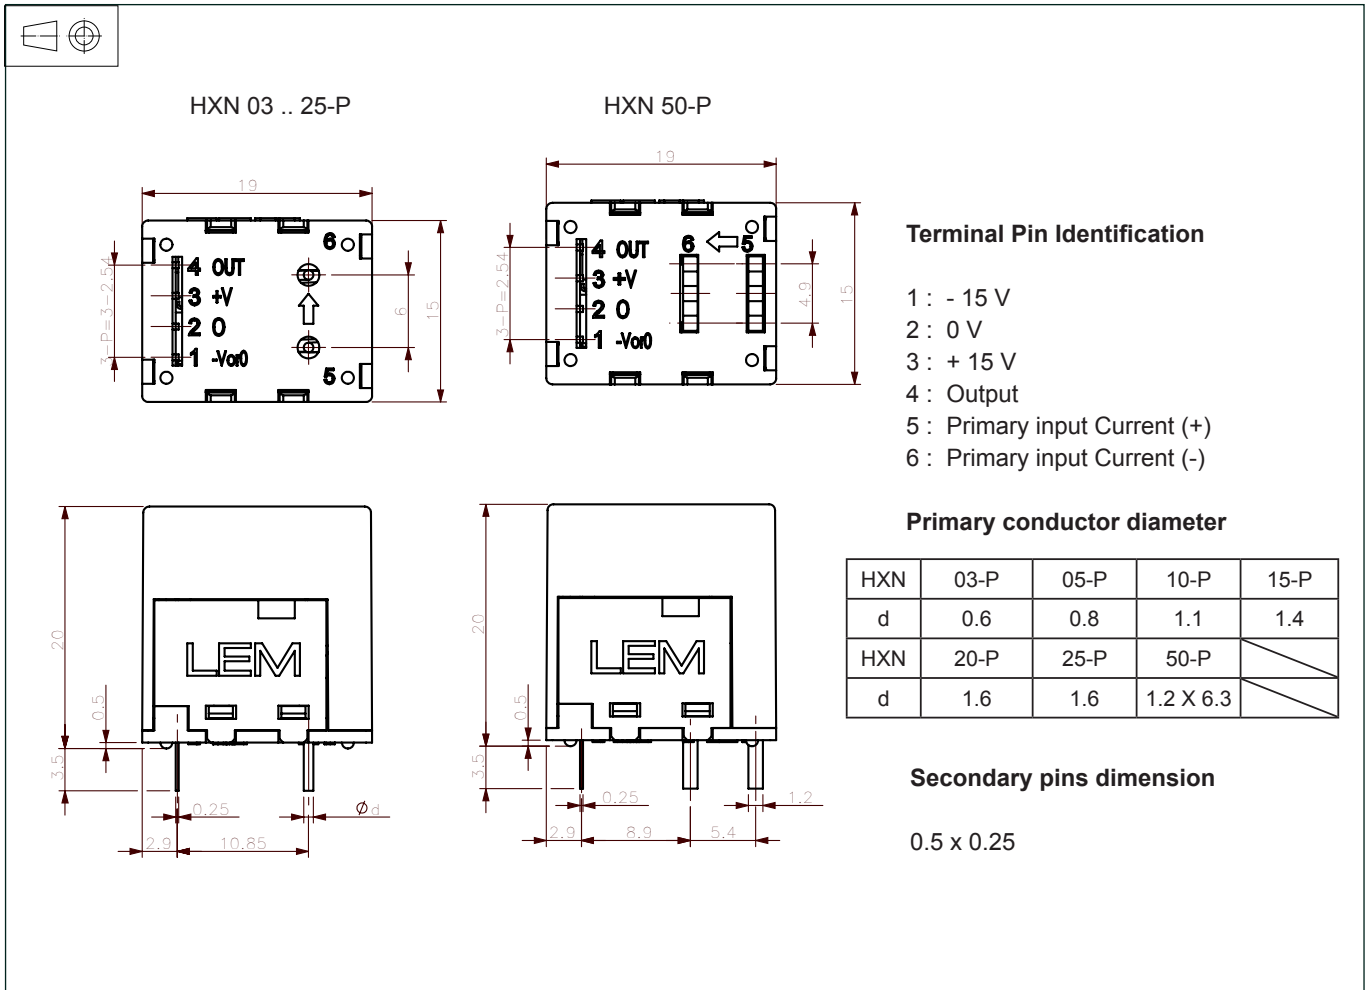

Mechanical characteristics

- General tolerance ± 0.5 mm