
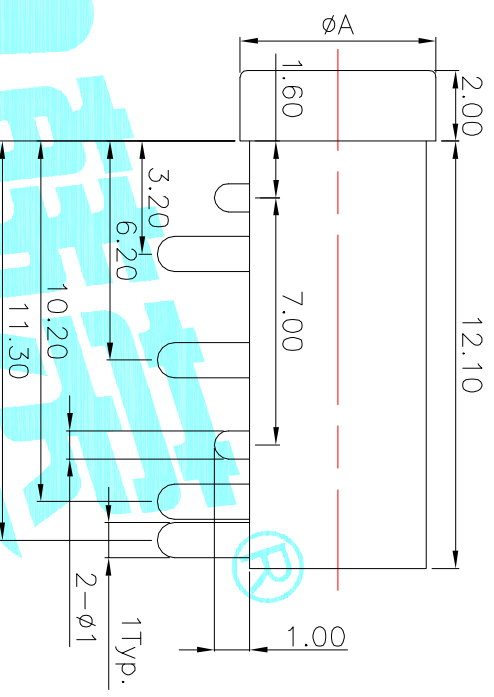


P.C.B LAYOUT(copper-sided view)

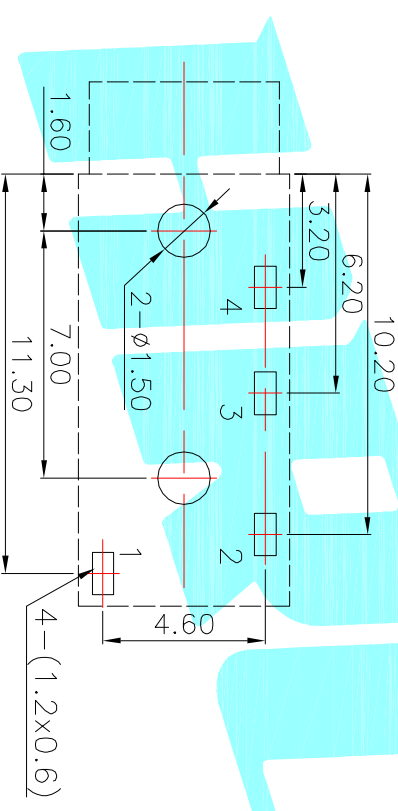

| | | |
|--------------|---|---|
| L=2.8 A=ø5.6 | 1 | 2 |
| L=2.8 A=ø5.0 | 3 | 4 |
| L=1.8 A=ø5.6 | 5 | 6 |
| Schematic | | |
| | | |
| | | |
| | | |

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

| | | | | | | |
|---|------|-------|--------------|---------|--------|--------|
| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
| | A | | NEW | | | |
| 20180423端子长度变更 20180423 Terminal length change | | | | | | |
| DRAWN J.X.Zhong 2013/11/11 CHECKED APPROVALS TOLERANCES ARE 30~12.5 ±0.30 ANGLE PART NO. PHONE JACKES 10~30 ±0.20 UNIT: mm SCALE: 1:1 PROJ: PJ-3200B 5~10 ±0.15 DRAWING NO. SHEET 1 OF 1 ~5 ±0.10 | | | | | | |
| APPROVALS DATE DRAWN J.X.Zhong 2013/11/11 CHECKED APPROVALS TITLE: PHONE JACKES ELECTRONICS CO.,LTD PHOSPHOR BRONZE Au Plating NYLON Black MATERIAL FINISHING REMARK | | | | | | |