





02P,03P




PIN 0.640 SQ,
Circuit 1



04P~06P





PIN 0.640 SQ,
Circuit 1




P.C.B. LAYOUT



07P~15P

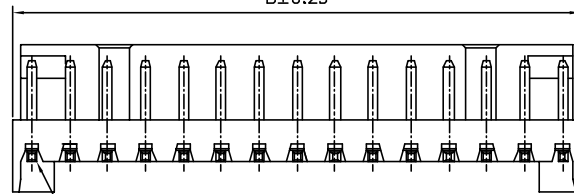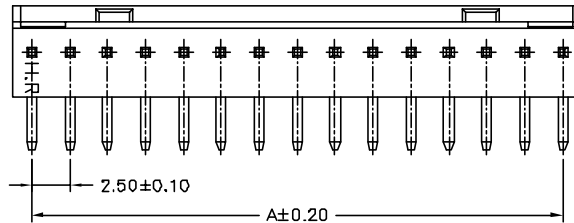

PIN 0.640 SQ,
Circuit 1



SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1500V AC/minute



Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0

Pantone Color: 153C

Ordering Information & Dimensions

| PART NO. | Dimensions | |
|-------------|------------|-------|
| | A | B |
| A2500WR-02P | 2.50 | 5.00 |
| A2500WR-03P | 5.00 | 7.50 |
| A2500WR-04P | 7.50 | 10.00 |
| A2500WR-05P | 10.00 | 12.50 |
| A2500WR-06P | 12.50 | 15.00 |
| A2500WR-07P | 15.00 | 17.50 |
| A2500WR-08P | 17.50 | 20.00 |
| A2500WR-09P | 20.00 | 22.50 |
| A2500WR-10P | 22.50 | 25.00 |
| A2500WR-11P | 25.00 | 27.50 |
| A2500WR-12P | 27.50 | 30.00 |
| A2500WR-13P | 30.00 | 32.50 |
| A2500WR-14P | 32.50 | 35.00 |
| A2500WR-15P | 35.00 | 37.50 |

| | | | | | |
|-------------------|-------------|---|--------------------------|---|-------------------------|
| | |  | | JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD. | |
| UNIT | SCALE | SHEET | TITLE: | | |
| mm | | 1 of 1 | 2.50mm PITCH 90 WAFER | | |
| DRAWN BY | APPROVED BY | | | | |
| 董正一 | 董正一 | | | | |
| 2001.02.01 | 2001.02.01 | | | | |
| GENERAL TOLERANCE | | | | | |
| B1 | REVISE | 2008.05.23 | X.X ±0.25 | ANGLE ± | |
| B0 | NEW RELEASE | 2006.02.21 | X.XX ±0.15 | | |
| REV. | DESCRIPTION | DATE | X.XXX ±0.05 |  | DRAW NO.: A2500WR-XP |
| | | | | | REV. B1 |