


SP13 Series

**SP
13**



SP1310 / P — SP1310 / S
插针 Male contact

电缆插头
与SP1311,SP1312 相配
Cable connector
Mate with SP1311,SP1312

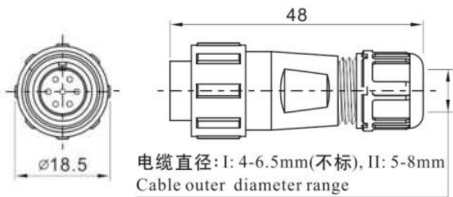


电缆直径: I: 4-6.5mm(不标), II: 5-8mm
Cable outer diameter range

电缆外径 Cable outer diameter
I: 4-6.5mm(不标), II: 5-8mm
芯数 Number of contact
插孔 Female contact



SP1311 / P — SP1311 / S —

电缆对接插座
与SP1310 相配
In-line cable connector
Mate with SP1310

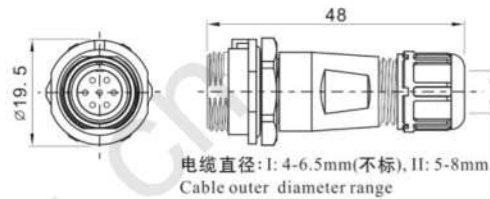


电缆直径: I: 4-6.5mm(不标), II: 5-8mm
Cable outer diameter range



SP1312 / P — SP1312 / S —

后螺母插座
与SP1310 相配
Rear-nut mount
Mate with SP1310

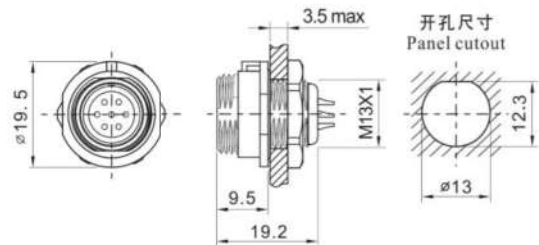

芯数 Number of contact

焊接芯件参数表

Solder contact spec

芯数 Number of contact	2	3	4	5	6	7	9
公端绝缘体正面图 Male contact face view							
额定电流 (A) Rated current (A)	13	13	5	5	5	5	3
接触件直径 (mm) Contact diameter (mm)	Ø1.6X2	Ø1.6X3	Ø1X4	Ø1X5	Ø1X6	Ø1X7	Ø0.7X9
工作电压 (AC.V) Rated voltage (AC.V)	250	250	200	180	125	125	125
耐压 (AC.V) 1 min Test voltage (AC.V) 1 min	1500	1500	1500	1000	1000	1000	1000
接触电阻 (mΩ) Contact resistance (mΩ)	2.5	2.5	5	5	5	5	10
线规 (mm ² /AWG) Wire size (mm ² / AWG)	≤2/14	≤2/14	≤0.75/18	≤0.75/18	≤0.75/18	≤0.75/18	≤0.5/20