

DB101S(DF005S) THRU DB107S(DF10S)



SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER


Reverse Voltage: 50 to 1000 Volts
Forward Current: 1.0 Amps

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction
- Rating to 1000V PRV
- Ideal for printed circuit board
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

MECHANICAL DATA

- Case: DBS molded plastic body
- Epoxy: UL94V-0 rate flame retardant
- Terminals: Plated leads solderable per MIL-STD-750, method 2026
- Mounting Position: Any
- Weight: 0.02ounce, 0.38 gram

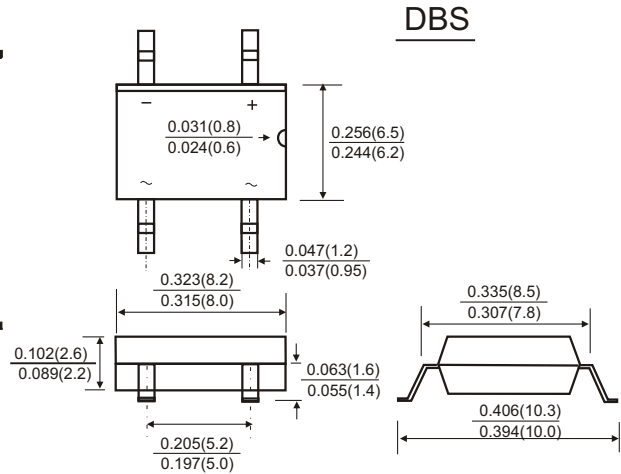

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified. Single phase ,half wave ,60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

	Symbols	DB101S DF005S	DB102S DF01S	DB103S DF02S	DB104S DF04S	DB105S DF06S	DB106S DF08S	DB107S DF10S	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current	I _(AV)	1.0							Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	50							Amps
Maximum Instantaneous Forward Voltage at 1.0 A DC	V _F	1.1							Volts
Maximum DC Reverse Current at rated DC blocking voltage	T _A =25 °C	10							μA
	T _A =125 °C	500							
Typical junction capacitance(Note 1)	C _J	25							pF
Typical thermal resistance(Note 2)	R _{θJA}	40							K/W
Operating junction and storage temperature range	T _J T _{STG}	-55 to +150							°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0 Volts.

2. Thermal resistance junction to ambient mounted on P.C.B. With 05*0.5 inches(1.3*1.3mm) copper pads

RATINGS AND CHARACTERISTIC CURVES DB101S(DF005S) THRU DB107S(DF10S)

FIG.1-TYPRCAL FORWARD CURRENT DERATING CURVE

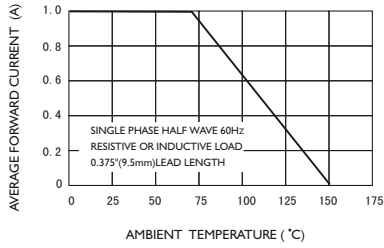


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

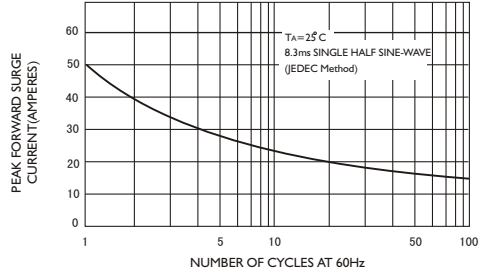


FIG3-TYPICAL JUNCTION CAPACITANCE

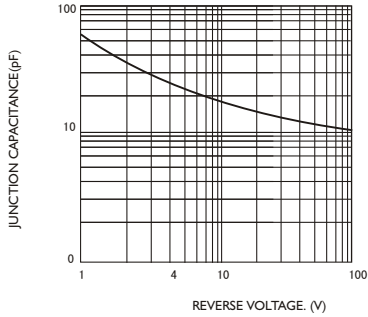


FIG4-TYPICAL FORWARD CHARACTERISTICS

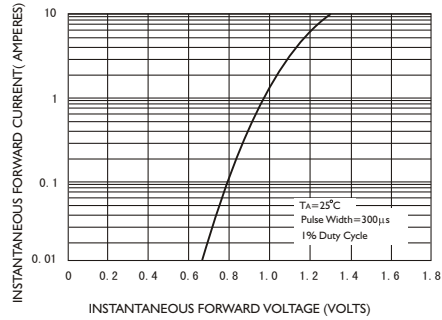


FIG.5-TYPICAL REVERSE CHARACTERISTICS

