

Features

- Uses CRM(CQ) advanced Trench technology
- Extremely low on-resistance $R_{DS(on)}$
- Excellent $Q_g \times R_{DS(on)}$ product(FOM)
- Qualified according to JEDEC criteria

Product Summary

V_{DS}	40V
$R_{DS(on)}$ typ.	2.8mΩ
I_D	80A



Applications

- Motor control and drive
- Battery management
- UPS (Uninterruptible Power Supplies)

100% DVDS Tested

100% Avalanche Tested

TO-263

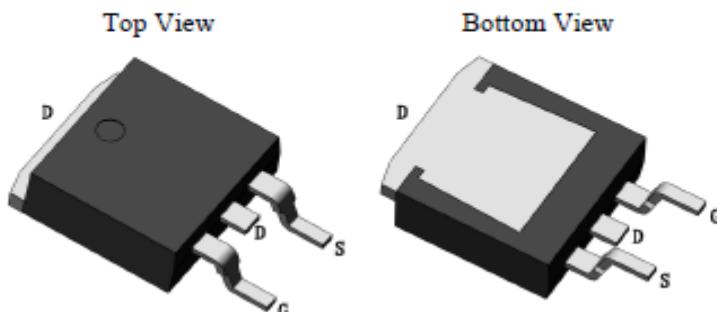

Package Marking and Ordering Information

Part #	Marking	Package	Packing	Reel Size	Tape Width	Qty
CRTS030N04L	CRTS030N04L	TO-263	Tube	N/A	N/A	50pcs

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	40	V
Continuous drain current $T_C = 25^\circ\text{C}$ (Silicon limit) $T_C = 25^\circ\text{C}$ (Package limit) $T_C = 100^\circ\text{C}$ (Silicon limit)	I_D	176 80 112	A
Pulsed drain current ($T_C = 25^\circ\text{C}$, t_p limited by $T_{j,\max}$)	$I_{D\text{ pulse}}$	320	A
Avalanche energy, single pulse ($L=0.5\text{mH}$, $R_g=50\Omega$)	E_{AS}	210	mJ
Gate-Source voltage	V_{GS}	± 20	V
Power dissipation ($T_C = 25^\circ\text{C}$)	P_{tot}	175	W
Operating junction and storage temperature	T_j , T_{stg}	-55...+150	°C

Thermal Resistance

Parameter	Symbol	Max	Unit
Thermal resistance, junction - case.	R _{thJC}	0.72	°C/W
Thermal resistance, junction - ambient(min. footprint)	R _{thJA}	132	

Electrical Characteristic (at T_j = 25 °C, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		

Static Characteristic

Drain-source breakdown voltage	BV _{DSS}	40	-	-	V	V _{GS} =0V, I _D =250uA
Gate threshold voltage	V _{GS(th)}	1.3	2	2.7	V	V _{DS} =V _{GS} , I _D =250uA
Zero gate voltage drain current	I _{DSS}	-	0.05	1	μA	V _{DS} =40V, V _{GS} =0V T _j =25°C T _j =150°C
Gate-source leakage current	I _{GSS}	-	10	100	nA	V _{GS} =20V, V _{DS} =0V
Drain-source on-state resistance	R _{DS(on)}	-	2.8	3.3	mΩ	V _{GS} =10V, I _D =50A, T _j =25°C T _j =150°C
Transconductance	g _{fs}	-	173	-	S	V _{DS} =5V, I _D =50A

Dynamic Characteristic

Input Capacitance	C _{iss}	-	5734	-	pF	V _{GS} =0V, V _{DS} =20V, f=1MHz
Output Capacitance	C _{oss}	-	686	-		
Reverse Transfer Capacitance	C _{rss}	-	338	-		
Gate Total Charge	Q _G	-	131	-	nC	V _{GS} =10V, V _{DS} =20V, I _D =50A, f=1MHz
Gate-Source charge	Q _{gs}	-	24	-		
Gate-Drain charge	Q _{gd}	-	35	-		
Turn-on delay time	t _{d(on)}	-	16	-	ns	V _{GS} =10V, V _{DD} =20V, R _{G_ext} =2.7Ω
Rise time	t _r	-	111	-		
Turn-off delay time	t _{d(off)}	-	73	-		
Fall time	t _f	-	110	-	Ω	V _{GS} =0V, V _{DS} =0V, f=1MHz
Gate resistance	R _G	-	0.8	-		

Body Diode Characteristic

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Body Diode Forward Voltage	V _{SD}	-	0.9	1.3	V	V _{GS} =0V, I _{SD} =50A
Body Diode Reverse Recovery Time	t _{rr}	-	31	-	ns	I _F =50A, dI/dt=100A/μs
Body Diode Reverse Recovery Charge	Q _{rr}	-	30	-	nC	

Typical Performance Characteristics

Fig 1: Output Characteristics

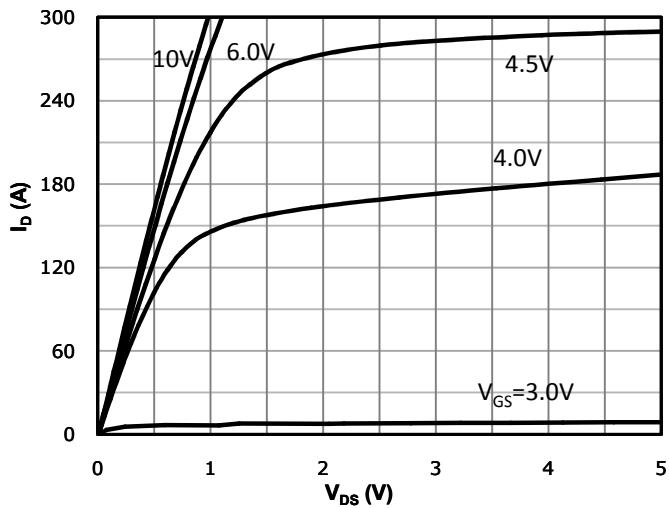


Fig 2: Transfer Characteristics

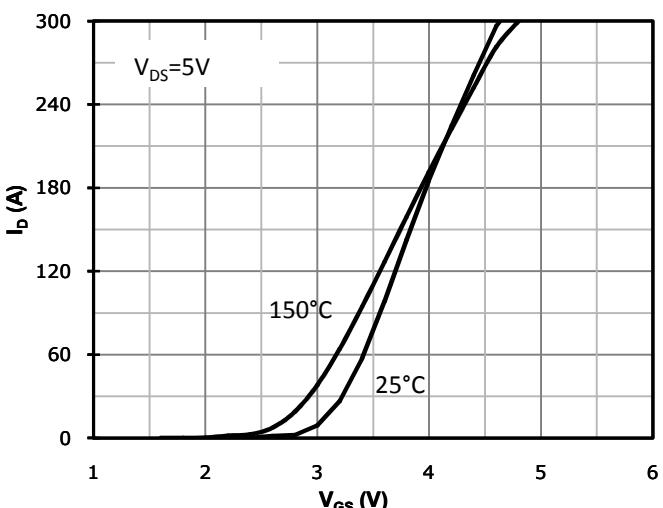
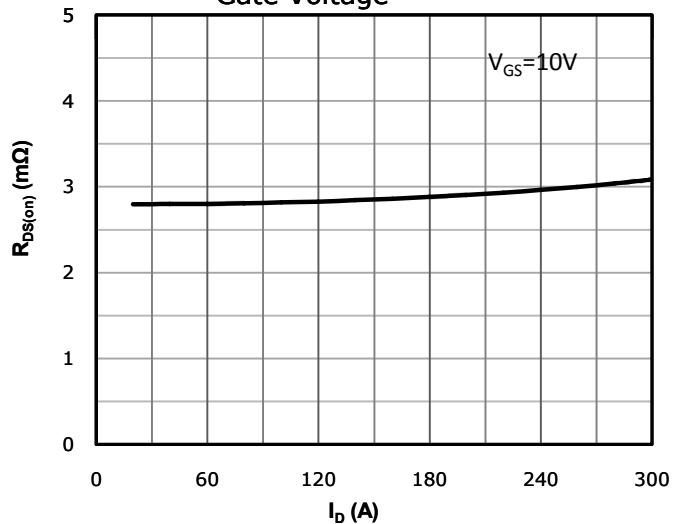
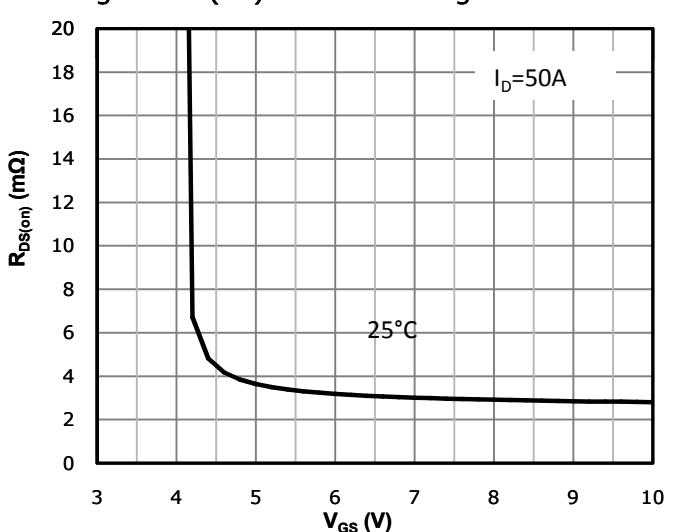
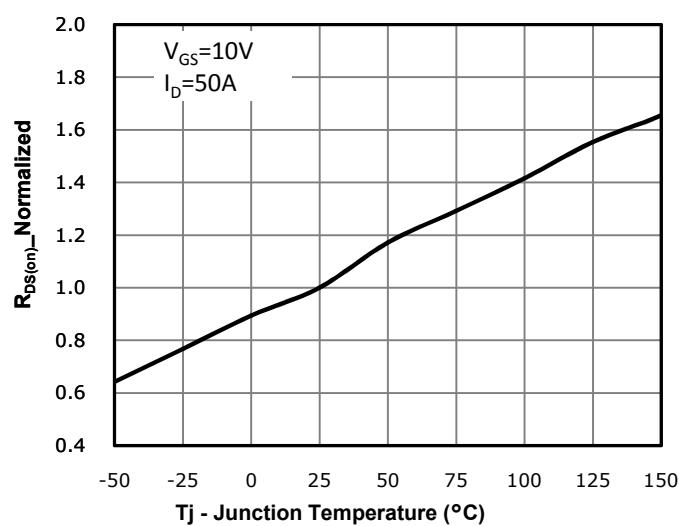

 Fig 3: R_{d(on)} vs Drain Current and Gate Voltage

 Fig 4: R_{d(on)} vs Gate Voltage

 Fig 5: R_{d(on)} vs. Temperature


Fig 6: Capacitance Characteristics

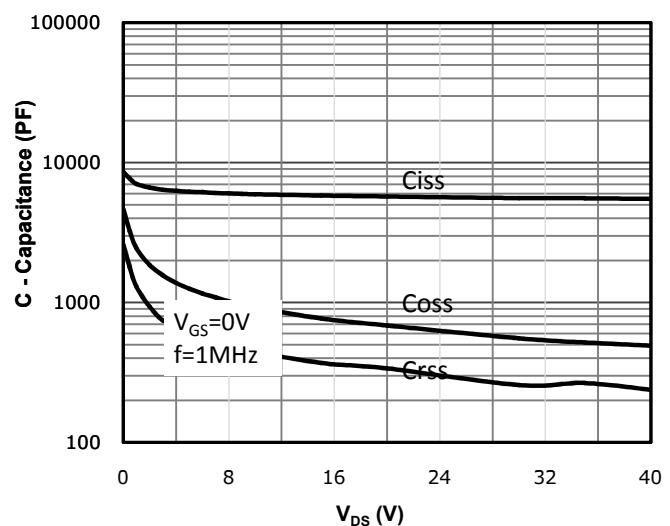


Fig 7: Gate Charge Characteristics

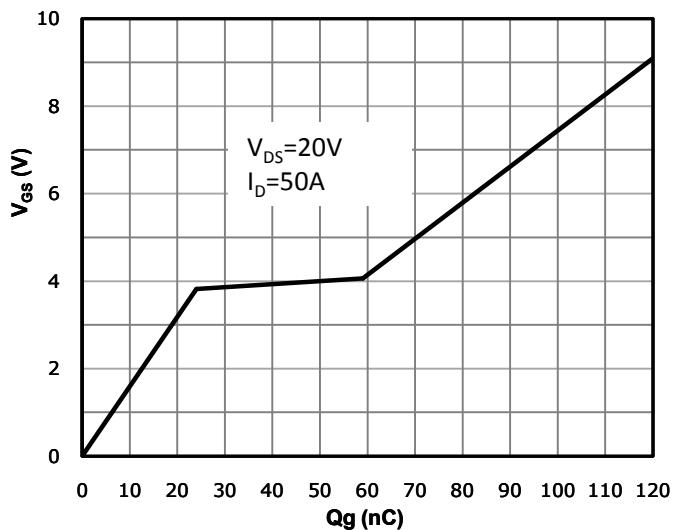


Fig 8: Body-diode Forward Characteristics

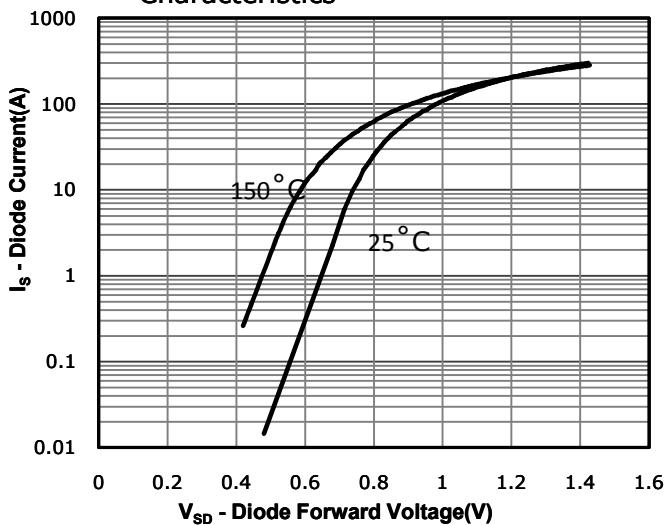


Fig 9: Power Dissipation

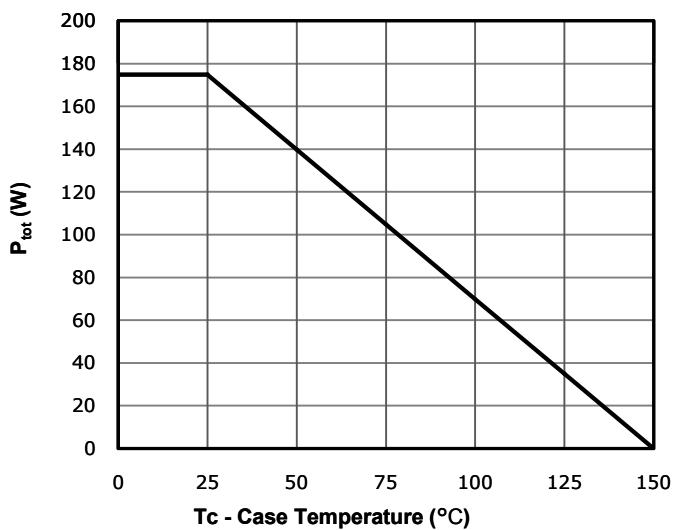


Fig 10: Drain Current Derating

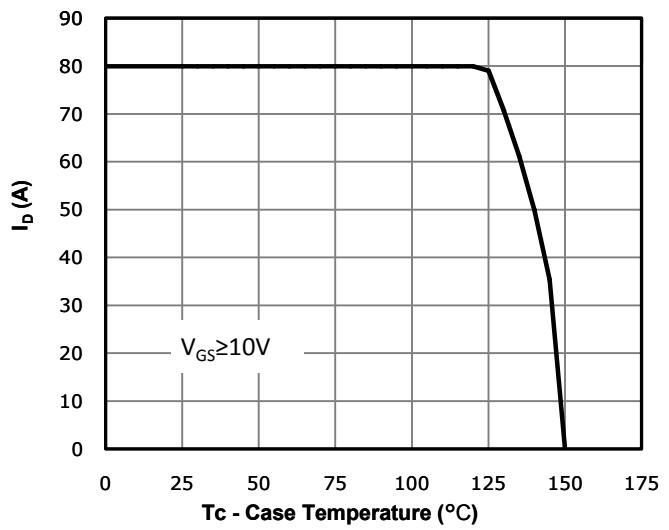


Fig 11: Safe Operating Area




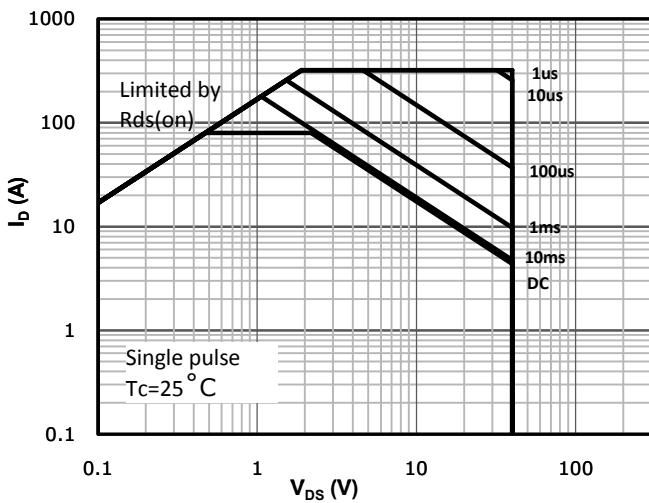


Fig 12: Max. Transient Thermal Impedance

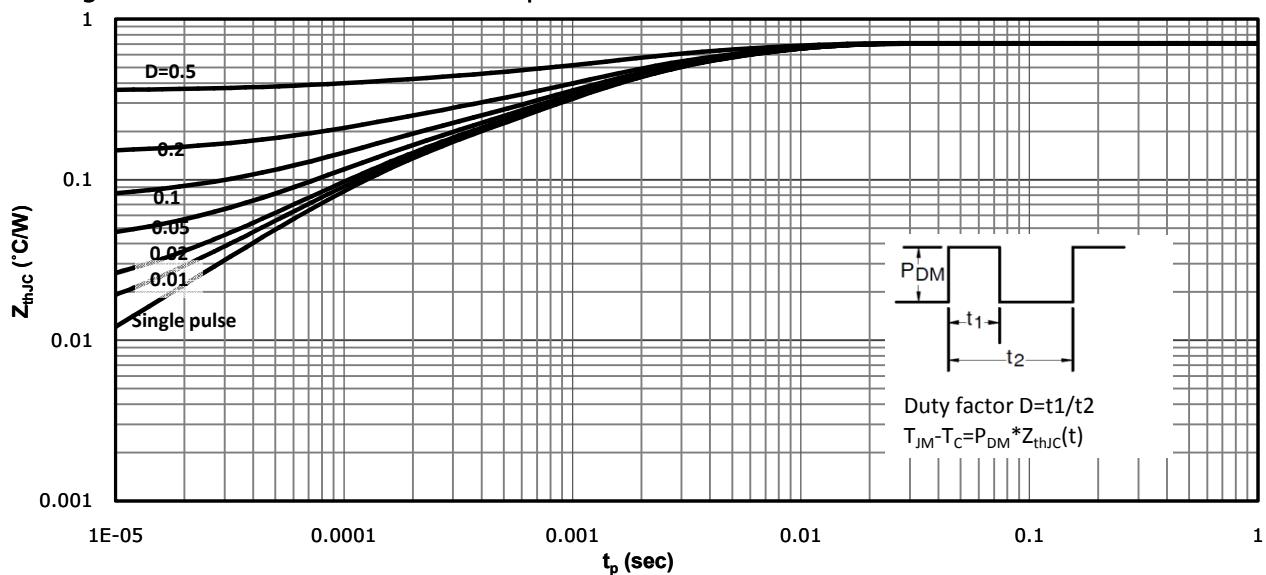
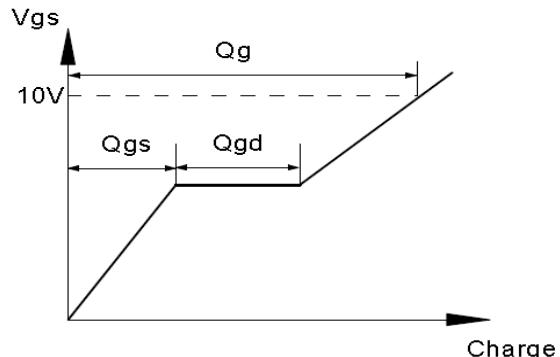


Test Circuit & Waveform



Gate Charge Test Circuit & Waveform

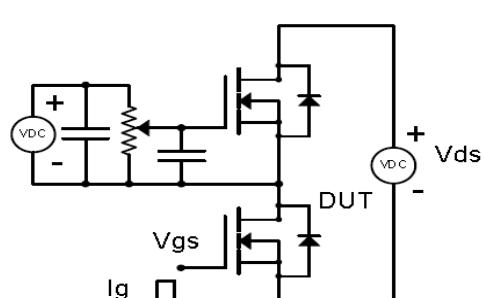



Resistive Switching Test Circuit & Waveforms

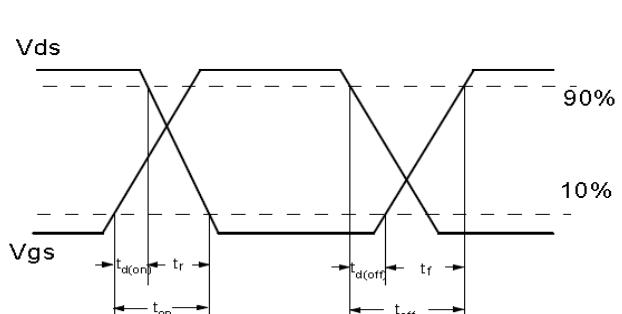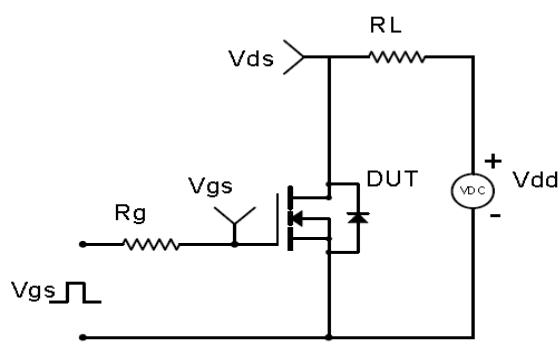


Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

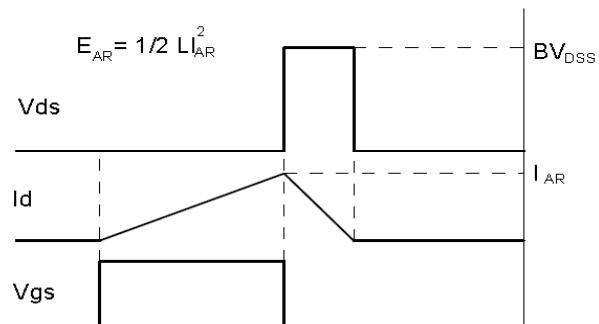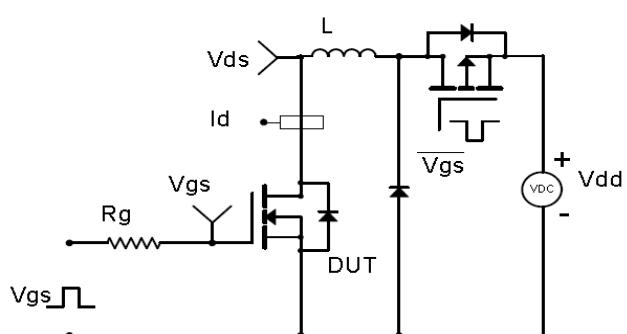

Diode Recovery Test Circuit & Waveforms

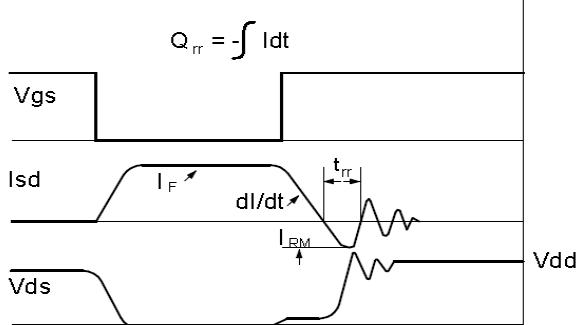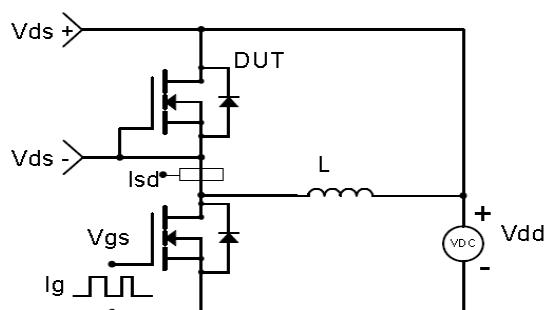

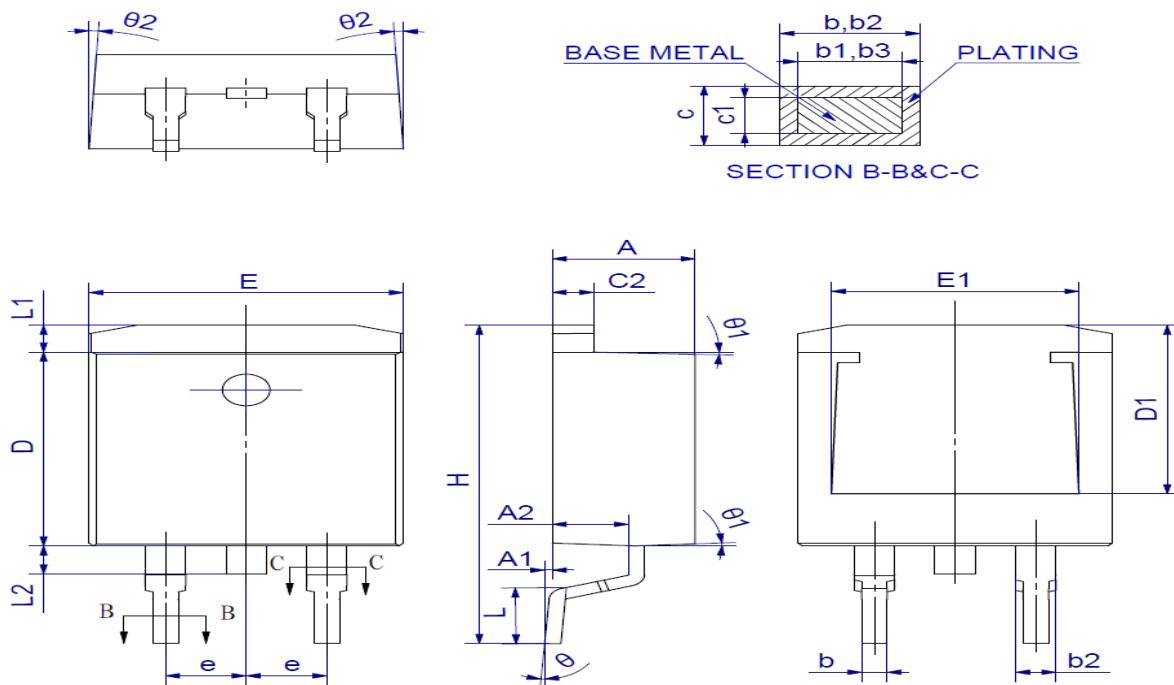Package Outline: TO-263-3L


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.4	4.67	0.173	0.184
A1	0	0.25	0.000	0.010
A2	2.2	2.6	0.087	0.102
b	0.76	0.89	0.030	0.035
b1	0.75	0.85	0.030	0.033
b2	1.23	1.37	0.048	0.054
b3	1.22	1.32	0.048	0.052
c	0.47	0.6	0.019	0.024
c1	0.46	0.56	0.018	0.022
c2	1.25	1.35	0.049	0.053
D	9.1	9.3	0.358	0.366
D1	8	----	0.315	----
E	9.78	10	0.385	0.394
E1	7.8	----	0.100 Typ.	----
e	2.54 TYP.		0.1 TYP	
H	14.9	15.7	0.587	0.618
L	2	2.6	0.079	0.102
L1	1.1	1.4	0.043	0.055
L2	1.5	1.75	0.059	0.069
θ	0°	8°	0°	8°
θ1	5°	9°	5°	9°
θ2	1°	5°	1°	5°



华润微电子(重庆)有限公司

CRTS030N04L

Trench N-MOSFET 40V, 2.8mΩ, 80A

Revision History

Revison	Date	Major changes
1.0	2018/12/18	Release of formal version

Disclaimer

Unless otherwise specified in the datasheet, the product is designed and qualified as a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability, such as automotive, aviation/aerospace and life-support devices or systems.

Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.

CRM(CQ) reserves the right to improve product design, function and reliability without notice.



©China Resources Microelectronics (Chongqing) Limited

Page 9