


SPECIFICATION

Contact Rating: 50mA,12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min.500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.20mm
 Operating Temp: -30℃~+85℃
 Storage Temp: -30℃~+80℃

PAPT NO	TS-1824SR-X
Operating Force	B:160gf C:260gf
Height	H:0.55

SWITCH CONNECTOR

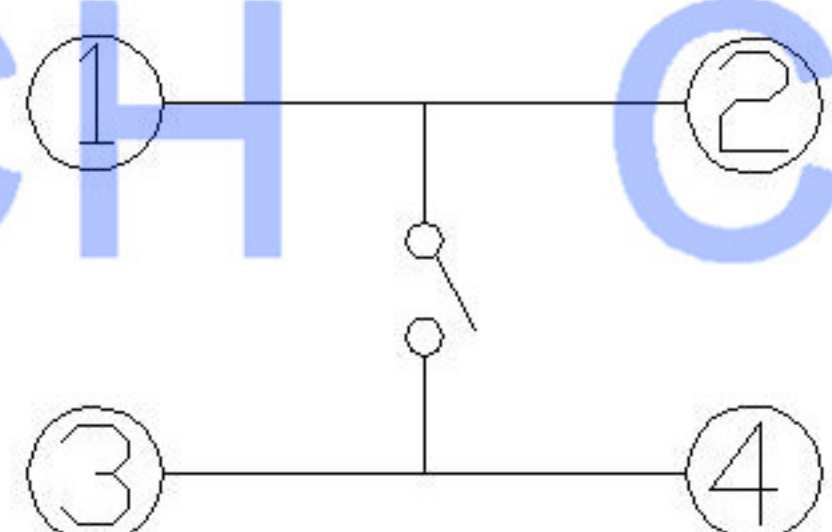

CIRCUIT DIAGRAM

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	4	4	Brass (0.30t)	Plating silvering	——
④	Contact	1	1	F.ag/Sus	Natural	——
③	Base	1	1	Lcp		——
②	Cover	1	1	kapton filmPI	Plating Nickel	——
①	Keystake	1	1			——

MARK	DESCRIPTION	DATE	REVISED	APPROVED	units: mm	DSND	DATE	SCALE: N/A	MODEL TYPE: TACT SWITCH		
ΔX					tolerance: X.X ±0.2mm	DWN	DATE	VIEW:	PART NO.:		
ΔX					X.XX ±0.1mm	CHKD	DATE	UNIT: mm	DWG NO.: TS-1824SR-X		
ΔX					X.XXX ±0.05mm	APPD	DATE	SIZE: A4			
UNSPECIFIED TOLERANCES						XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT: 1.0g	SHEET: 1/1	REVISION: A0