


CIRCUIT

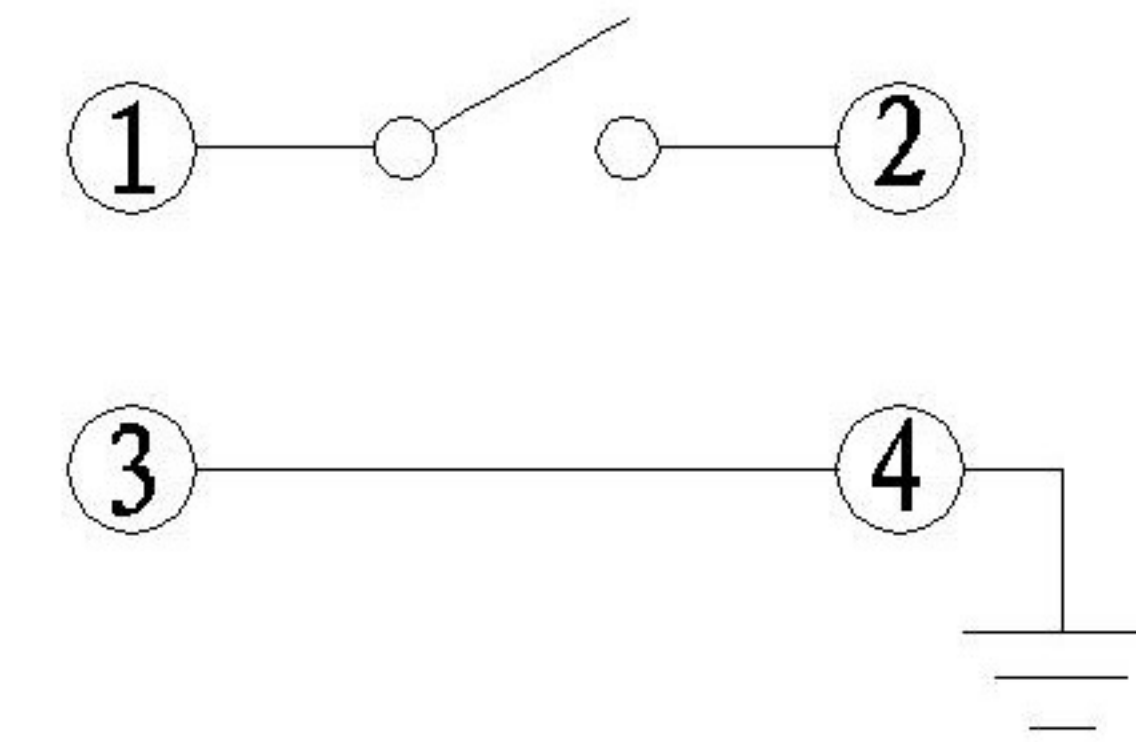

SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -30°C ~ +85°C
 Storage Temp: -30°C ~ +80°C

PAPT NO	TS-1188A-X-X
Operating Force	B: 160gf C: 260gf
Height	H: A: 3.55 B: 4.3 C: 5.0

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	4	4	Brass (0.30t)	Plating silvering	
④	Contact	1	1	F.ag/Sus	Natural	
③	Base	1	1	Lcp		
②	Cover	1	1	Brass	Plating Nickel	
①	Keystake	1	1	Lcp		

DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
DWN		DATE		VIEW:	PART NO.:		
CHKD		DATE		UNIT: mm	DWG NO.:		
APPD		DATE		SIZE: A4	TS-1188A-X-X		
KKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT 1.0g	SHEET 1/1	REVISION A0

units: mm					
tolerance:					
X.X	±0.2mm				
X.XX	±0.1mm				
X.XXX	±0.05mm				
UNSPECIFIED TOLERANCES					

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				