


Technical drawing of a window unit. The drawing shows a side elevation of a window with multiple panes. The overall width is labeled as $N \times 5.08 \pm 0.2$. The height of the window unit is labeled as $(N-1) \times 5.08 \pm 0.15$. The drawing includes details of the window frame, panes, and a central mullion. A dimension of 2.60 is indicated for the width of the central mullion.

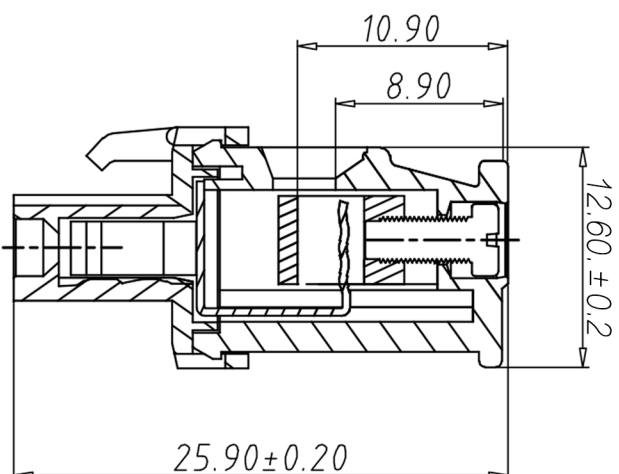

- 材质&电镀

- 电气性能

- 参考标准 U1

- 额定电压: 300V 450V

- 额定电流: 15A 20A

- 使用线径: 28-14AWG 2.5mm²

- 接触电阻: $20\text{M}\Omega$

- 绝缘电阻: 500M Ω /DC500V

- 耐电压: AC2000V/1min

- 机械性能

- 温度范围: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$

- 瞬时温度: +250°C for 5 Sec

- 扭矩: 5. 10kgf-cm/0. 5Nm/4. 43Lbin

- 剥线长度: 7-8mm


编码原则:

WJ2EDGKA-5.08—☐☐☐P

X	X	X
Customer Request		
客户需求		

No. of Pole	
极数	
1	Single pitch 单倍间距
2	Double pitch 双倍间距

Color 颜色	
1	Grey 灰色
2	Blue 蓝色
3	Black 黑色
4	Green 绿色
5	Orange 橙色
6	Red 红色
7	Trans-parent 透明
8	Yellow 黄色
9	White 白色

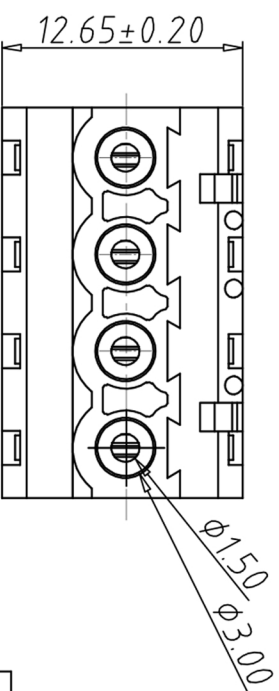

尺寸公差:		角度公差:	
X.	± 0.20	X.	$\pm 2^\circ$
.X	± 0.15	.X	$\pm 1.5^\circ$
.XX	± 0.10	.XX	$\pm 1^\circ$
图纸类型	客户图纸		
比例	1:1	图页	1 \ 1
图纸编号			

投影法		品名	插拔式接线端子
单位	mm		间距5.08MM
纸张尺寸	A4	产品系列	WJ2BDEKA 系列



宁波康奈克斯电气有限公司
Ningbo Kangnex Electric Co., Ltd