



本公司智慧財產，未經同意不得複製  
 DAILYWELL copyright, may not be used  
 without permission from DAILYWELL

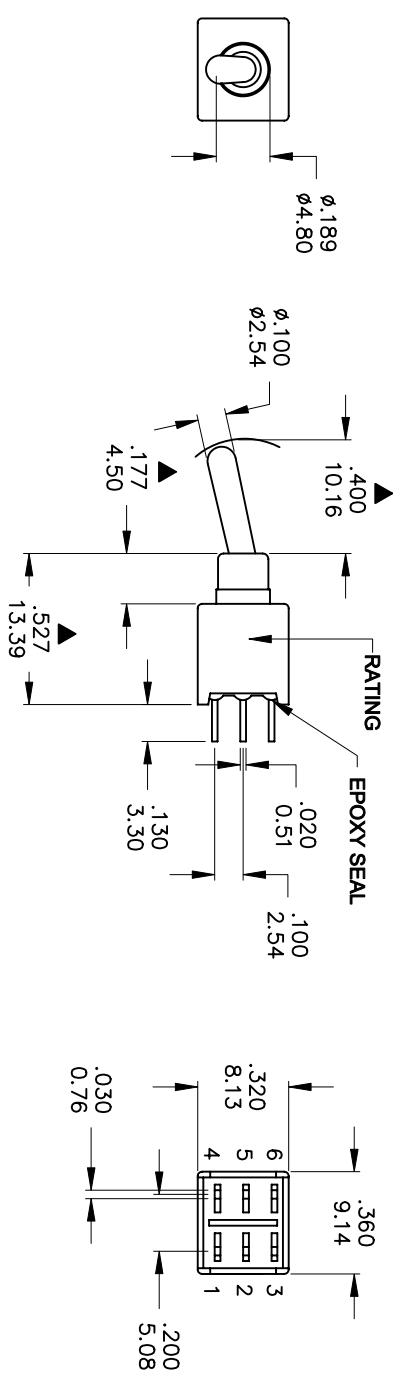

**P.C. MOUNTING**

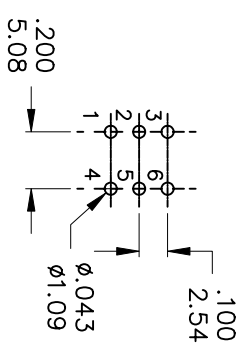

Model No.	POS.1	POS.2	POS.3
2AD1	ON	NONE	ON
Term. Comm.	2-3-5-6	N/A	2-1-5-4
SCHEMATIC			

**SWITCH FUNCTION**

CONTACT MATERIAL	TERMINAL PLATING	RATINGS
Q Silver	Q = Gold flash over silver	3 Amps @120 VAC or 28 VDC 1 Amps @250VAC 0.4 Volt-Amps(VA) max. @20V max. (AC or DC)
S	S = Gold flash over silver,pure-4in	
C	C = Gold over silver	
K	K = Gold over silver,pure-4in	
R	R = Gold	
G	G = Gold,pure-4in	

**德利威電子股份有限公司**  
**DAILYWELL ELECTRONICS CO.,LTD.**

**SPECIFICATIONS**

**MECHANICAL LIFE:** 50,000 make-and-break cycles.  
**CONTACT RESISTANCE:** 20mΩ max. Initial @ 2-4VDC  
 100mA for both silver and gold plated contacts.  
**INSULATION RESISTANCE:** 1,000MΩ min.  
**DIELECTRIC STRENGTH:** 1,000 V RMS@sea level.  
**OPERATING TEMPERATURE:** -30°C to 85°C.

**MATERIALS**

**CASE & BUSHING -** Glass filled nylon 6/6, retardant, heat stabilizer( UL94V-0 )  
**ACTUATOR -** Brass, chrome platede,Internal O-ring seal, standard for all actuators.  
**SWITCH SUPPORT -** Brass, tin plated.  
**TERMINALS/CONTACT -** Silver or gold plated copper.  
 RoHS:2002/95/EC

符號	原尺寸	修改後尺寸	變更日期
1	(A)		
2	(B)		
3	(C)		
4	(D)		
5	(E)		

<b>SCALE (比例) :</b>	<b>3 : 2</b>
<b>TOLERANCE (公差) :</b>	0.00 mm ± 0.25mm
<b>ANGULAR :</b>	0.0 mm ± 0.40mm
<b>FILE NAME :</b>	2ADP0146

<b>TITLE</b>	Sealed Sub - Miniature Toggle Switches			<b>SIZE</b>	A4
<b>DWG NO.</b>	2AD1T1A2M2QES			<b>UNIT</b>	inch
<b>REV.</b>	<b>DATE</b>	<b>DATE</b>	<b>DATE</b>	<b>SHEET</b>	1 of 1
版本	A	JUN - 10 - 2010		張數	
<b>CHECKED BY</b>	<b>RICHARD</b>	<b>DRAWN BY</b>	<b>IRENE</b>		
審核		製圖			