



本公司智慧財產，未經同意不得複製  
 DAILYWELL copyright, may not be used  
 without permission from DAILYWELL

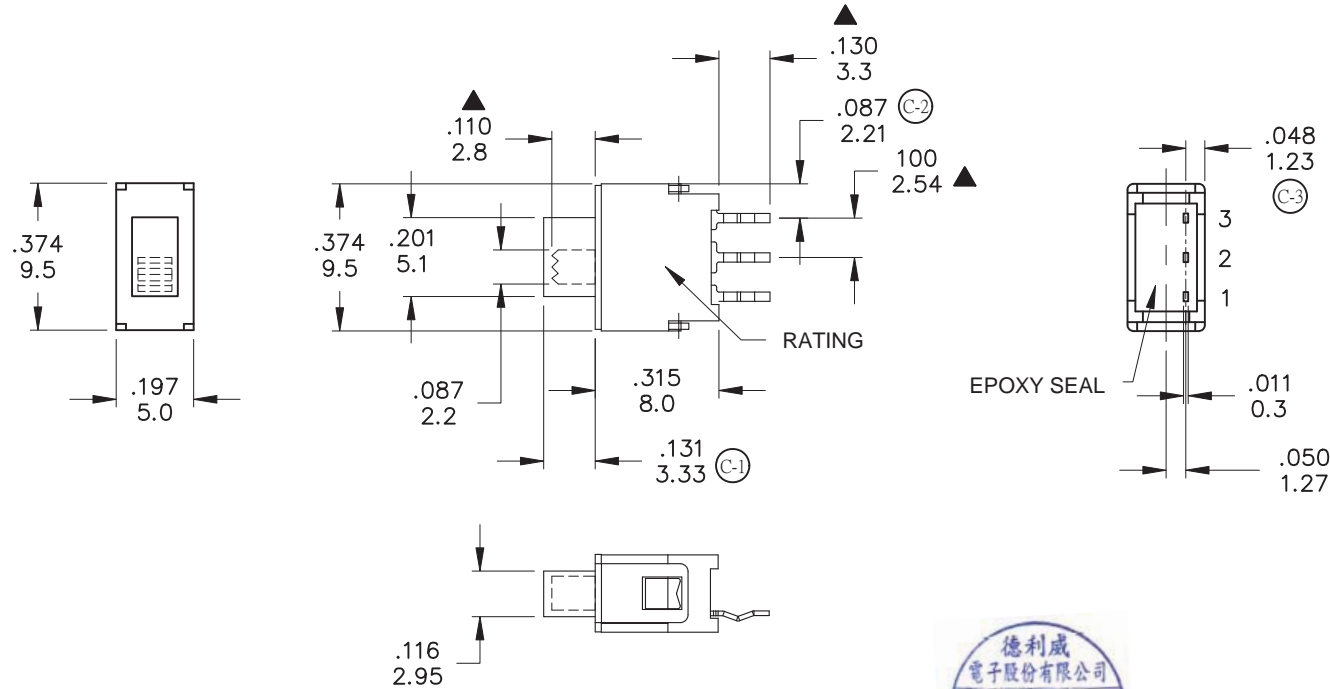

Model No.	POS.1	POS.2	POS.3
5SES1	ON	NONE	ON
Term. Comm.	2-1	N/A	2-3
SCHEMATIC			

SWITCH FUNCTION

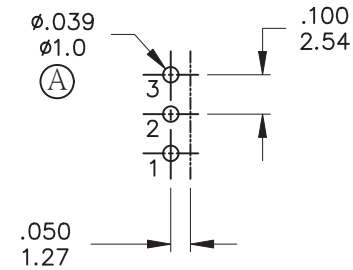

P.C. MOUNTING



**SPECIFICATIONS**

**CONTACT RATING:** Max 0.4 VA max @ 48 VAC or DC  
**MECHANICAL LIFE:** minimum 40,000 operations.  
**CONTACT RESISTANCE:** 50mΩ max.  
**INSULATION RESISTANCE:** 500MΩ at 250 VDC. (A)  
**DIELECTRIC STRENGTH:** 500V, 50 Hz for the duration of 1 minute.  
**OPERATING TEMPERATURE:** -20°C to 80°C.  
**DEGREE OF PROTECITON:** IP67

**MATERIALS**

(B) **ACTUATOR** - PBT, yellow std.  
 (B) **HOUSING** - Brass, Ni plated.  
 (D) **CASE** - Glass filled nylon 6/6, flame retardant, heat stabilized (UL94V-0)  
**CONTACT/TERMINALS** - Phosphor bronze gold - plated over nickel barrier.  
**TERMINAL SEAL** - Epoxy  
**RoHS & Lead Free**

德利威電子股份有限公司  
 DAILYWELL ELECTRONICS CO., LTD.

符號	原尺寸	修改後尺寸	變更日期	SCALE (比例): 3:2	TITLE 圖名	Sub-Miniature Slide Switches	SIZE 圖紙	A4		
1 (A)	500mΩ, 1.09(.043)	500MΩ, 1.0(.039)	JAN-10-2011	TOLERANCE (公差): 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5° FILE NAME : 5SESP0005	DWG NO. 圖號	5SES1S105M2RES	UNIT 單位	inch mm		
2 (B)	HOUSING材質SPCC,變更Brass,Ni plated		JAN-02-2012		REV. 版本	E	DATE 日期	MAY - 05 - 2010	SHEET 張數	1 of 1
3 (C)	新增尺寸標註		NOV-02-2012		CHECKED BY 審核	陳燈財		DRAWN BY 製圖	IRENE	
4 (D)	參閱ECN N1235,CASE材質更新為nylon 6/6		AUG-21-2018							
5 (E)										