

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- 1. Rated voltage/current : 300V / 8A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Torque value : M2 , 1.77Lb.in
- 4. Wire range : 28~16AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	7A


- 2. Torque value : M2 , 0.2N·m
- 3. Wire range : 0.5~1.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.5/3.81mm, Poles : N=02~24P
- 3. Stripping length : 6~7mm
- 4. Operating temperature : -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range	In		mm		Nominal dimension range	mm	Tolerance				
	Over	Under	Over	Under							
6	10	10	30	60	100	150	0.1/10				
10	10	24	30	60	100	150	≤				
±0.15		±0.20		±0.30		±0.50		±0.70	±1.00	±1.30	±2

6. RoHS Compliance

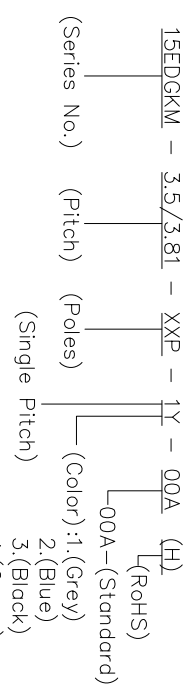

- 00A - (Standard)
- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

Approval mark can be printed on left and right end both

A B C D E F G H

8

7

6

5

4

3

2

1

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	
REV	DO
SHEET	1/1
SCALE	1:1

A B C D E F G H