


Model No.	POS.1	POS.2
8AS9	OFF	MOM
Term. Comm.	OPEN	1-3
SCHEMATIC		

SWITCH FUNCTION

本公司智慧財產，未經同意不得複製
 DAILYWELL copyright. may not be used
 without permission from DAILYWELL

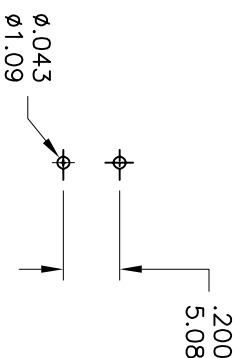

P.C. MOUNTING

SPECIFICATIONS

MECHANICAL LIFE: 50,000 make-and-break cycles.
CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ/min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30° C to 85° C.

MATERIALS

CASE & BUSHING - Glass filled nylon 66, flame retardand, heat stabilized (UL94V-0).
PLUNGER - Thenoplastic Polyester (UL 94V-0), with internal O-ring seal.
SWITCH SUPPORT - Brass or steel electroin plated.
CONTACT - Silver or gold plated Copper alloy.
ROHS - 2002/95/EC

RATING:

R.G : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
 Q.C.S.K : 3Amps @120VAC or 28VDC.
 1Amp @250VAC.

符號	原尺寸	修改後尺寸	變更日期
1	(A)		
2	(B)		
3	(C)		
4	(D)		
5	(E)		

SCALE (比例): 3 : 2
TOLERANCE (公差): 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5°
FILE NAME: 8ASP0111

TITLE 圖名	Sealed Sub - Miniature Pushbutton Switches			SIZE 圖紙	A4
DWG NO. 圖號	8AS9P1A1M2RES			UNIT 單位	inch mm
REV. 版本	A	DATE 日期	JUN - 26 - 2007	SHEET 張數	1 of 1
CHECKED BY 審核	RICHARD		DRAWN BY 製圖	FION	

德利威電子股份有限公司
DAILYWELL ELECTRONICS CO.,LTD.