


Features

- 24Watts peak pulse power ($t_p = 8/20\mu s$)
- Bidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2 $\pm 15kV$ contact $\pm 20kV$ air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 4A (8/20 μs)

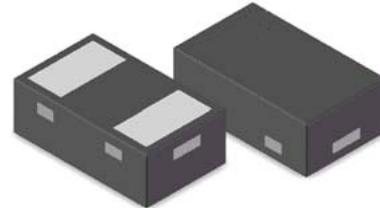


Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA' s)
- Notebooks, Desktops, and Servers
- Portable Instrumentation

Mechanical Data

- DFN1006 package
- Molding compound flammability rating: UL 94V-0
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

Schematic & PIN Configuration

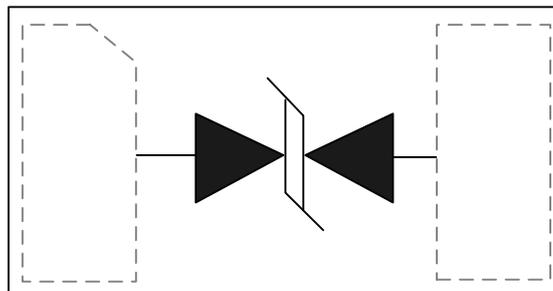

DFN1006

Absolute Maximum Rating


| Rating | Symbol | Value | Units |
|--|-----------|----------------|-------|
| Peak Pulse Power ($t_p = 8/20\mu s$) | P_{PP} | 24 | Watts |
| Peak Pulse Current ($t_p = 8/20\mu s$) (note1) | I_{pp} | 4 | A |
| ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact) | V_{ESD} | 20 15 | kV |
| Lead Soldering Temperature | T_L | 260(10seconds) | °C |
| Junction Temperature | T_J | -55 to + 125 | °C |
| Storage Temperature | T_{stg} | -55 to + 125 | °C |

Electrical Characteristics

| Parameter | Symbol | Conditions | Min | Typical | Max | Units |
|---------------------------|-----------|----------------------------|-----|---------|------|-------|
| Reverse Stand-Off Voltage | V_{RWM} | | | | 5.0 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_T=1mA$ | 6.0 | | 15.0 | V |
| | | $I_T=10mA$ | 1.0 | | 5.0 | V |
| Reverse Leakage Current | I_R | $V_{RWM}=5V, T=25^\circ C$ | | | 500 | nA |
| Clamping Voltage | V_C | $I_{PP}=4A, t_p=8/20\mu s$ | | | 6 | V |
| Trigger Voltage | V_T | | | 8.5 | 10 | V |
| Junction Capacitance | C_j | $V_R = 0V, f = 1MHz$ | | 0.5 | 0.6 | pF |

Electrical Parameters (TA = 25°C unless otherwise noted)

| Symbol | Parameter |
|-----------|---|
| I_{PP} | Maximum Reverse Peak Pulse Current |
| V_C | Clamping Voltage @ I_{PP} |
| V_{RWM} | Working Peak Reverse Voltage |
| I_R | Maximum Reverse Leakage Current @ V_{RWM} |
| V_T | Trigger voltage |
| I_T | Test Current |

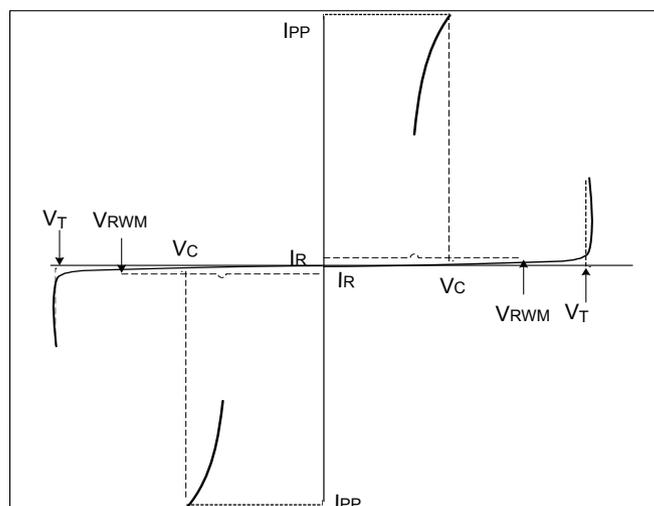

Note: 8/20μs pulse waveform.

Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

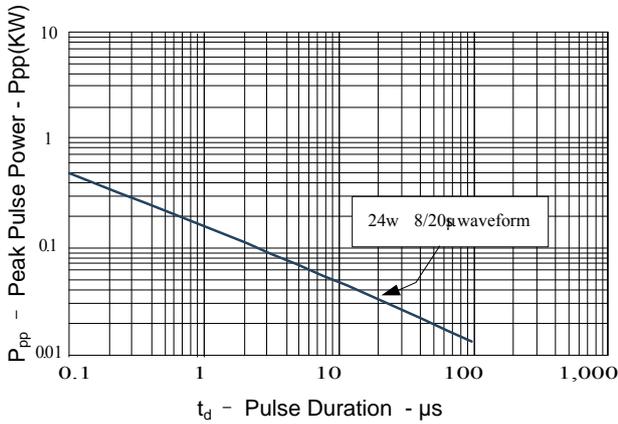


Figure 2: Power Derating Curve

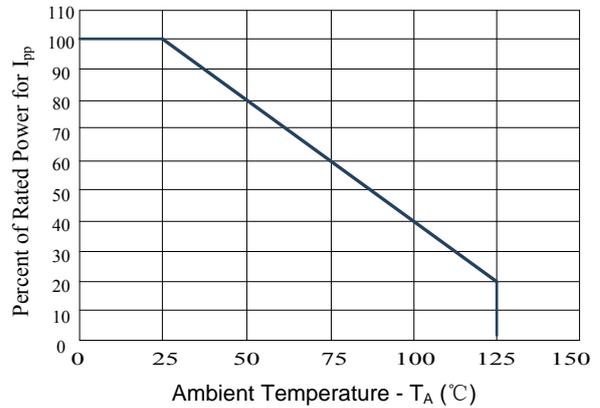


Figure3: Pulse Waveform

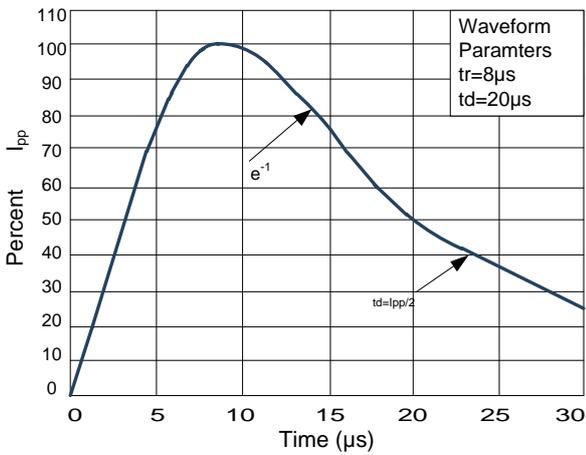


Figure 4: Clamping Voltage vs.Ipp

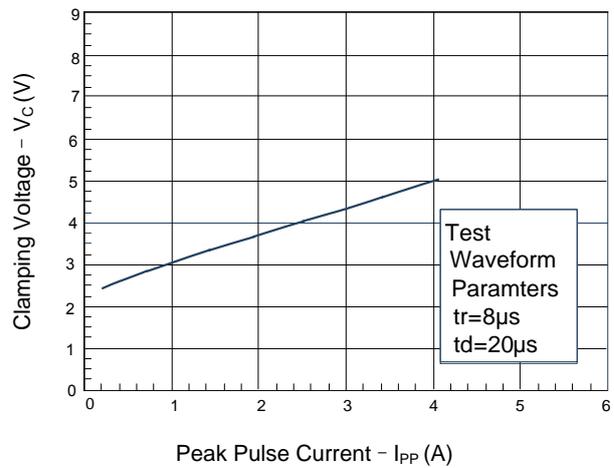


Figure5: ESD clamping (+8kV contact discharge per IEC61000-4-2)



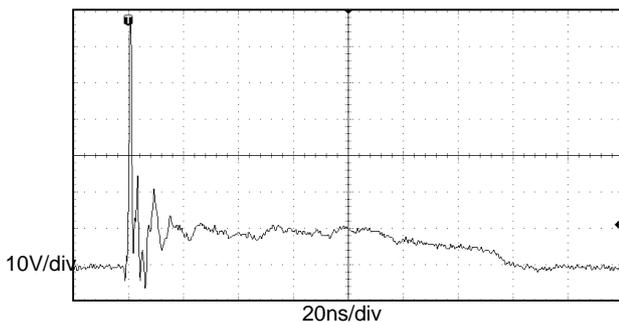


Figure6: ESD clamping (-8kV contact discharge per IEC61000-4-2)

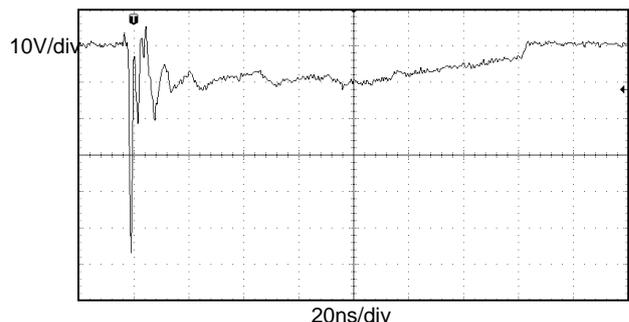

Outline Drawing – DFN1006

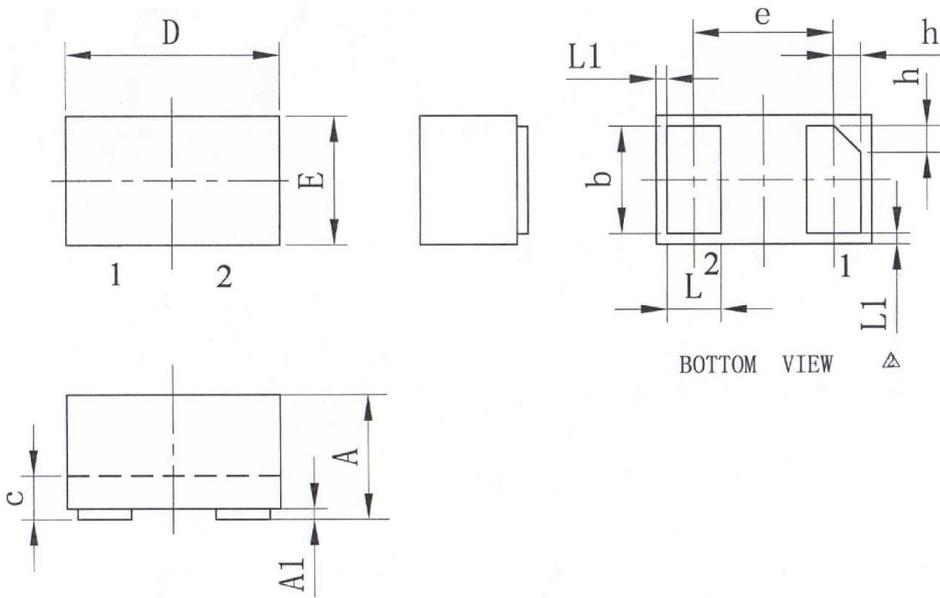

| SYMBOL | MILLIMETER | | |
|---------------|------------|------|------|
| | MIN | NOM | MAX |
| A | 0.45 | 0.50 | 0.55 |
| A1 | 0 | 0.02 | 0.05 |
| b | 0.45 | 0.50 | 0.55 |
| c | 0.12 | 0.15 | 0.18 |
| D | 0.95 | 1.00 | 1.05 |
| e | 0.65BSC | | |
| E | 0.55 | 0.60 | 0.65 |
| L | 0.20 | 0.25 | 0.30 |
| L1 | 0.05REF | | |
| h | 0.07 | 0.12 | 0.17 |
| 载体尺寸 (M11) | 20*20 | | |

Ordering information

| Order code | Package | Base qty | Delivery mode |
|-------------|---------|----------|---------------|
| MDFN2C051US | DFN1006 | 10k | Tape and reel |