


本公司智慧財產，未經同意不得複製
DAILYWELL copyright, may not be used
without permission from DAILYWELL

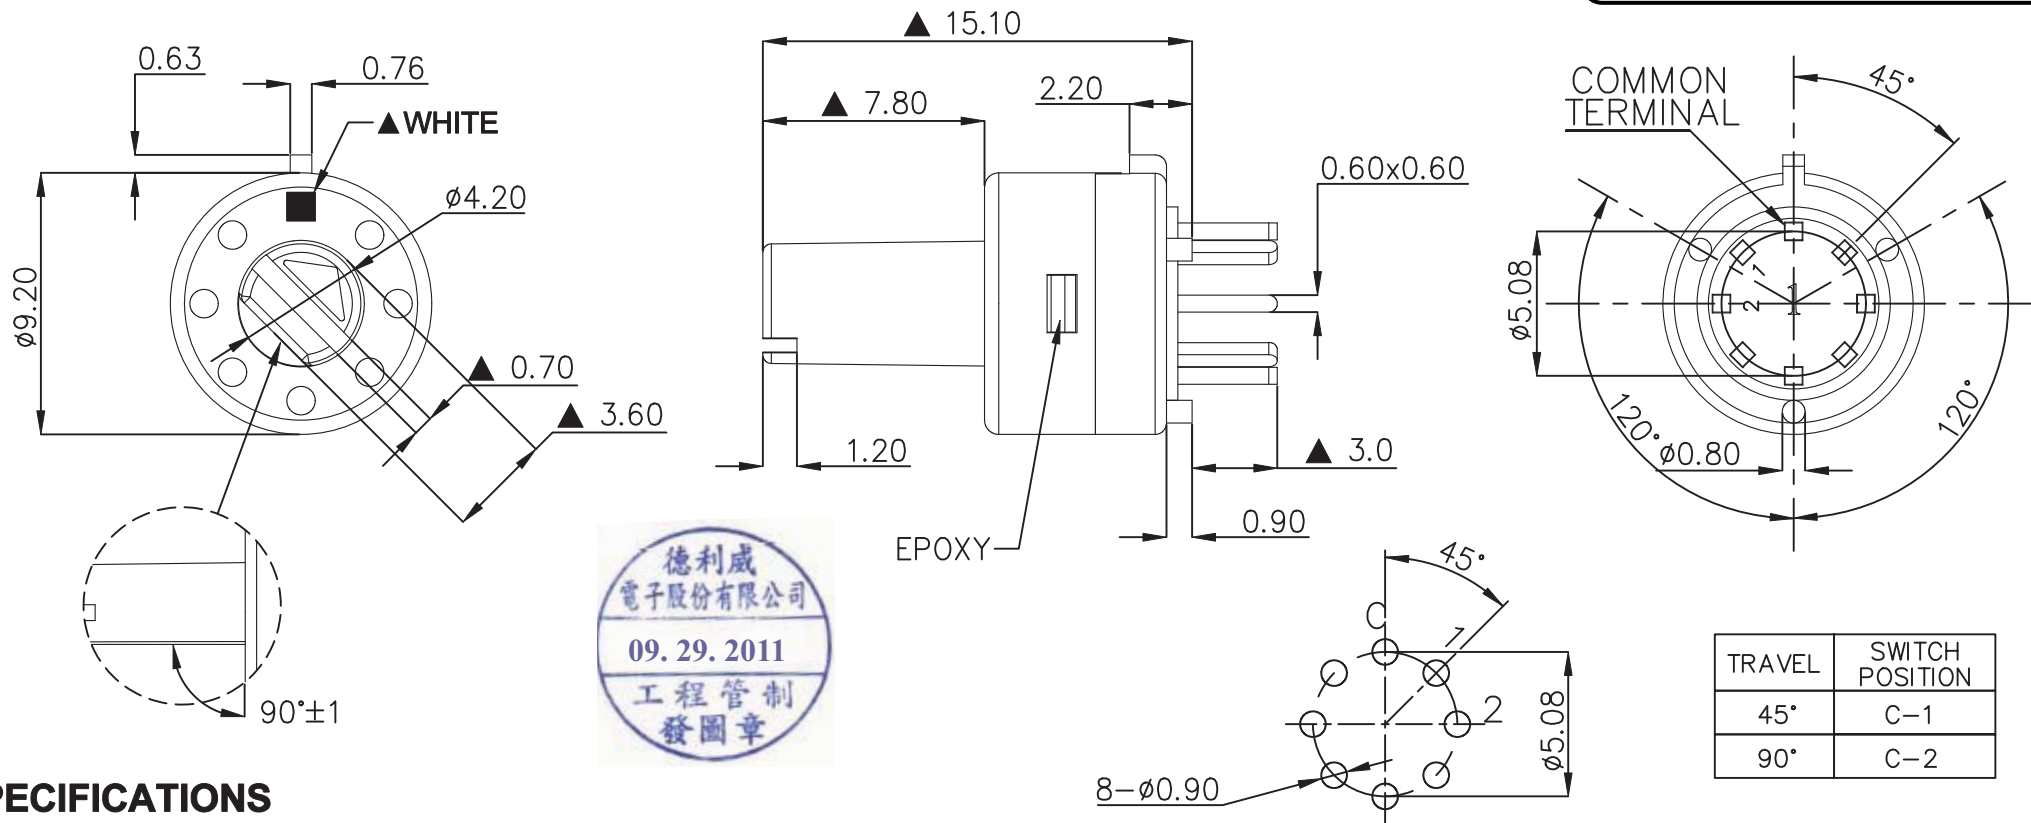


SPECIFICATIONS

ELECTRICAL RATING: 0.5A 24VDC; 0.2A 48VDC
 CONTACT RESISTANCE: 100 mΩ MAX.
 INSULATION RESISTANCE: 100 MΩ MIN. 500VDC
 DIELECTRIC STRENGTH: 500VAC for 1 minute
 OPERATING FORCE: 350±150g
 OPERATING LIFE: 2,000 cycles
 OPERATING TEMPERATURE RANGE : -20°C ~ 70°C

MATERIAL
 HOUSING: NYLON 6/6
 BASE: LCP
 ACTUATOR: NYLON 6/6
 TERMINAL: Brass gold plating.

P.C.B. LAYOUT

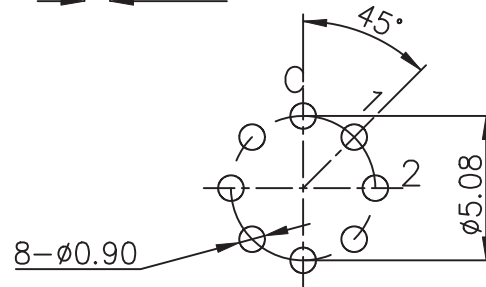

德利威電子股份有限公司
DAILYWELL ELECTRONICS CO.,LTD.

	符號	原尺寸	修改後尺寸	變更日期
1	Ⓐ			
2	Ⓑ			
3	Ⓒ			
4	Ⓓ			
5	Ⓔ			

SCALE (比例) : 4 : 1
TOLERANCE (公差) :
 0.00 mm ± 0.25mm
 0.0 mm ± 0.40mm
ANGULAR : ± 5°
FILE NAME : RT0030

TITLE		ROTARY SWITCH		SIZE
圖名				圖紙
DWG NO.		RT-002		A4
圖號				UNIT
REV.		DATE	SEP - 29 - 2011	mm
版本		B		SHEET
CHECKED BY		RICHARD	DRAWN BY	張數
審核			製圖	1 of 1
			IRENE	