Detector
Vertical Type

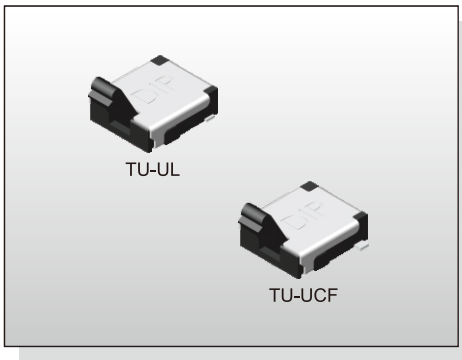

FEATURES

※Ultra-thin with height 1.2 mm
※Flat & bending terminal available

APPLICATION

※Detection of video cameras
※Mobile Phone

SPECIFICATION

Contact Rating	50uA, 3V DC to 10mA, 5V DC
Contact Resistance	1Ω max.
Insulation Resistance	100MΩ min.
Dielectric Strength	100V AC/1 minute
Operating Force	40gf max.
Travel	60°
Operating Life	50,000 cycles
Operating Temp.	-10°C ~ +60°C
Storage Temp.	-20°C ~ +70°C

HOW TO ORDER

T U - U □ □ - V - □

- Uplift
- □=Without Post / C=With Post
- F=Flat / L=J Bend
- RoHS & Lead Free Solderable
- Package: T/R=Tape & Reel

CIRCUIT

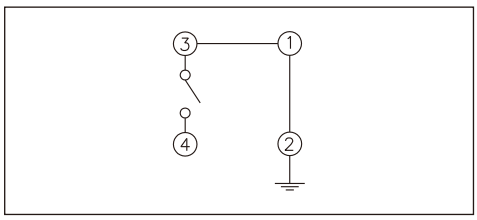

PACKAGE

<Tape & Reel>
2300 pcs

TU-UL

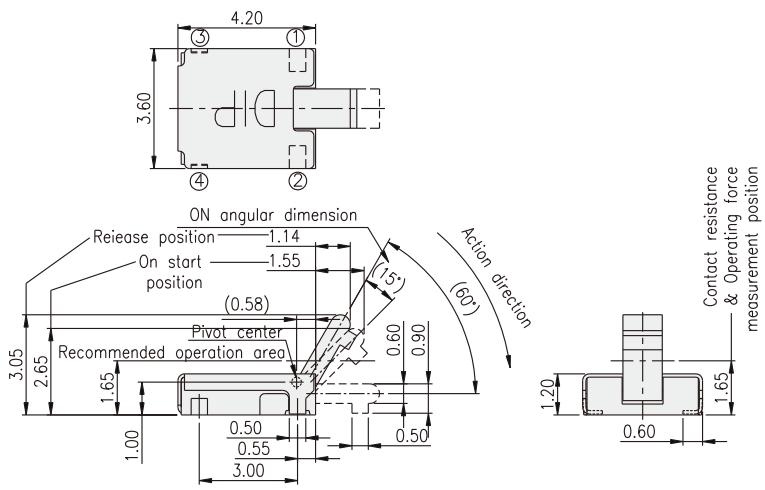


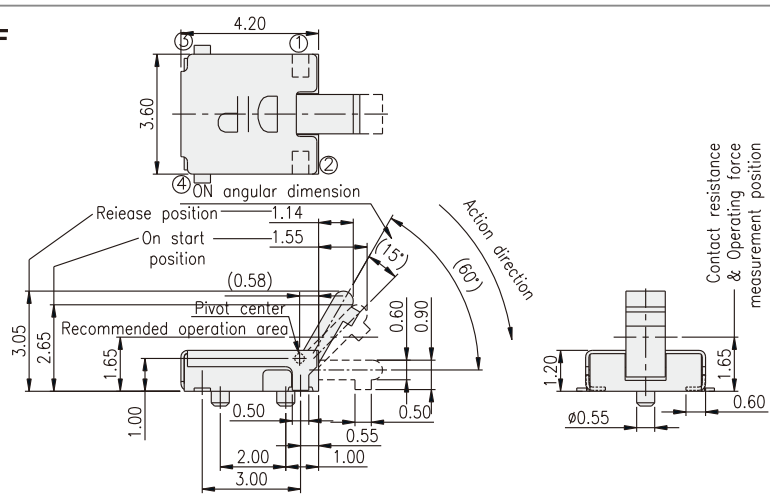
TU-UCF