





SCHEMATIC



Rating	DC 50V 0.3A
Circuit	1P - 2T
Timing	Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	300gf ±100gf
Operating Life (cycle)	10,000 Min.

- 9.0mm
- 8.0mm
- 7.0mm
- 6.0mm
- 5.0mm
- 4.0mm
- 3.0mm
- 2.0mm
- G (mm)

P.C.B LAYOUT MOUNTING PATTERN

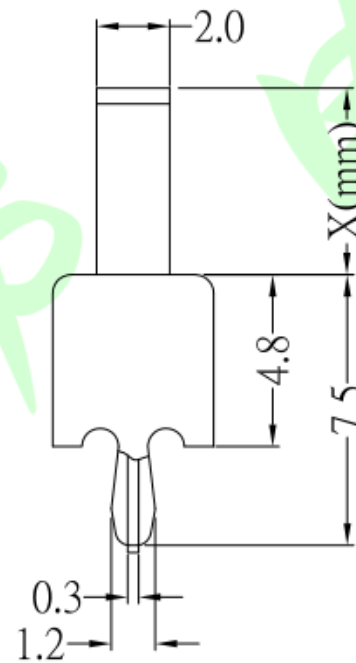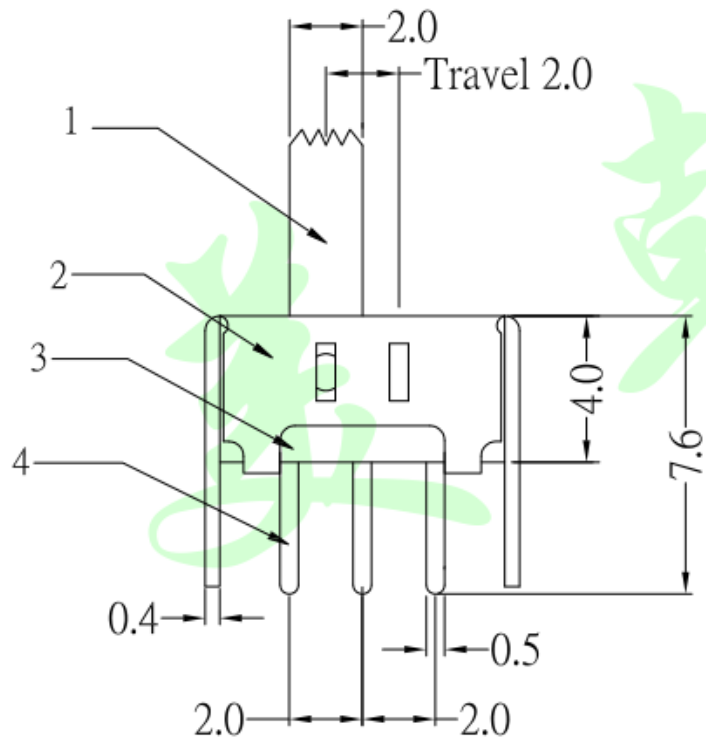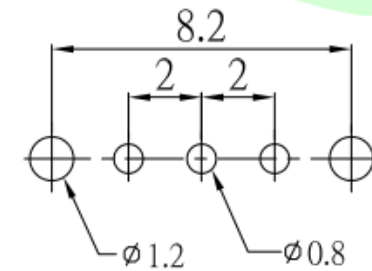

NO	DESCRIPTION	QTY	MATERIAL	PLATING
6	Spring Plate	1	SUS	Natural
5	Contact Clip	1	PBS	Ag-Plating
4	Terminal	1	Brass	Ag-Plating
3	Base	1	Phenolic Resin	Natural
2	Frame	1	SPCC	Ni-Plating
1	Knob	1	POM	Black

>0.5~2	±0.05	±0.10	±0.15
>2~5	±0.15	±0.20	±0.25
>5~10	±0.25	±0.28	±0.30
角度 ANGLE	±0.5°		
未注尺寸公差 (mm)			

第一视角	设计 Jack Jin	图面 单位 A4 MM
	审核 Jacky Zhong	比例 重量
	批准 Tony Meng	页码 版次 1/1 A/0

东莞市美韩电子科技有限公司			
Dongguan Usakro Electronic Technology Co., Ltd.			
1:1	DWG NO.	型号:SS-12D02-G3 / 短路	SIZE A4
1 of 1	PART NO.	规格:8.8*3.9*4.0 / 柄高3.0mm	VER R