


PCB HOLE CONFIGURATION
RECOMMENDED PANEL CUTOUTS

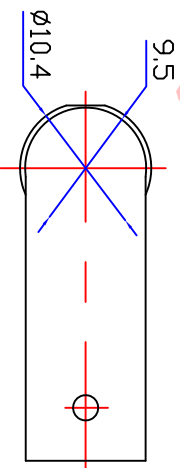

Specifications

Impedance: 50 Ohms
Frequency Range: DC~3G
VSWR: 1.3MAX
Working Voltage: 500V rms @ sea level
Insulation Resistance: 5000 Ohms min
Temperature Range: -55°C TO +155°C
Relative Temperature: ≤95% (40°C ±2°C)
Drawings products are in line with ROHS standards

NO	DESCRIPTION	MATERIAL	FINISH	QTY	APPROVALS	DATE	SCALE	UNIT	TOLERANCE	ANGULAR	MAGNIFICATION	SIZE	PRODUCT NO.	CAD FILE	SHEET
3	BODY	ZINC	NICKEL	1	DRAWN	2012/11/	10	View	0-6 6-30 30-120	±0.15 ±0.20 ±0.5	±2°	MM	BNC CONNECTOR DNN	DOSIN-801-0050	1 OF 1
2	INSULATOR	PDM	WHITE	1	CHECKED			UNIT							
1	PIN	BRASS	GOLD	1	APPROVALS	12/04.2012	SCALE	UNIT							

NOTE:
DRAWN
Zelin Zhang
CHECKED
John

DOSIN an ir COMMERCIAL
Dosin Industrial(H.K.)Co.Ltd
东莞市德奈五金电子有限公司
Dosin Hardware Electronics Co.,Ltd

E-mail: dosin2005@163.com
dosin2005@dosin-china.com
Web: http://www.dosin.com.cn
TEL: (0086) 769-81153906
FAX: (0086) 769-81873836

Product NO.	DESCRIPTION	DWN	DATE	APPROVEN
DOSIN-801-0050	First issue	JIM	2012/11/02	John kine