


技术参数 SPECIFICATIONS

- 线数 (Poles) : 9
- 适用线规 (Applicable wires) : AWG20#~16#
- 适应基板厚度 (Applicable PC board thickness) : 0.8~2.4mm
- 温度范围 (Temperature range) : -25 °C~85 °C
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 10A
- 接触电阻 (Contact resistance) : $\leq 0.01\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1500V.Ac/1min
- 材料 (Material) :
 - 插座 (Receptacle housing) : 尼龙 (PA66) UL94V-0
 - 插片 (Retainer) : 尼龙 (PA66) UL94V-2(0)
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)



端子 TERMINAL

通用35745、35746、35747 (P170)
Accepts:35745、35746、35747 (P170)


插片 RETAINER

通用35150-029*、35150-039* (P171)
Mating TPA:35150-029*、35150-039* (P171)




插头 PLUG HOUSING

与35151-0210、35151-0310、35151-0410配合 (P171~172)
MatingHousing:35151-0210、35151-0310、35151-0410 (P171~172)

安装尺寸 MOUNTING MEASUREMENT



HX18014-9R (35524-0920)

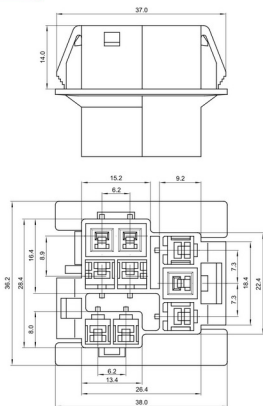

M1: MALE TERMINAL (35745)
M2: MALE TERMINAL (35747)
F1: MALE TERMINAL (35746)