
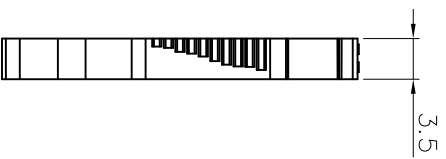
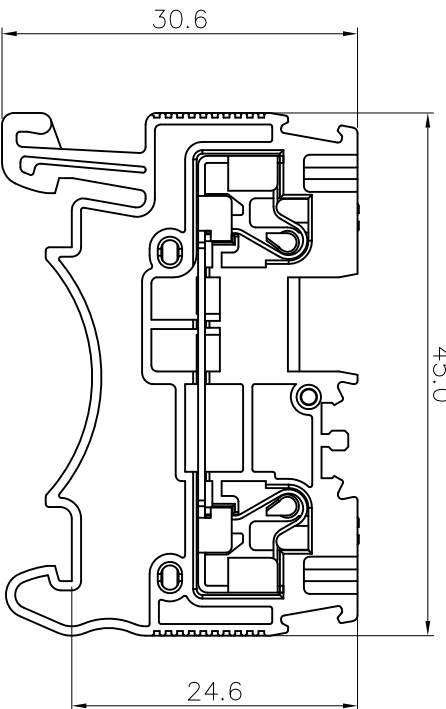


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

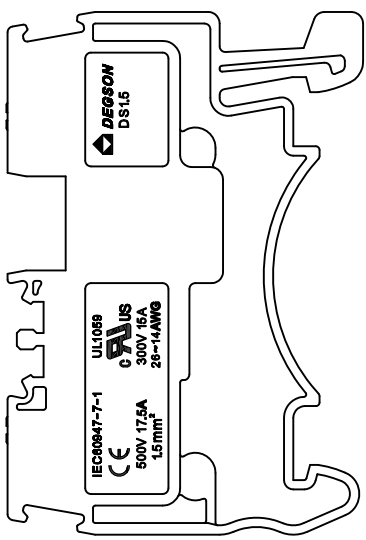

NOTES1:

UL Standard

1. Rated Voltage/Current : 300V / 15A
2. Withstanding Voltage : AC1600V/1Min.
3. Wire Range : 26~14AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	6.0KV
Rate Voltage(V)	500V
Rate Current(A)	17.5A


2. Wire Range : 0.2~1.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.5mm, Poles : N=01P
3. Stripping length : 8-10mm
4. Operating temperature : -40°C~+105°C
5. Undimensioned Tolerances:

Pitch Range	In mm		Nominal Dimension Range		mm
	Over	Tolerance	Over	Tolerance	
6 TO 10	±0.10	±0.10	±0.10	±0.10	0.1/10
10 TO 24	±0.10	±0.10	±0.10	±0.10	≤
24 TO 30	±0.10	±0.10	±0.10	±0.10	±2°
30 TO 60	±0.15	±0.20	±0.30	±0.50	±1.00
60 TO 100	±0.20	±0.30	±0.50	±0.70	±1.30
100 TO 150	±0.30	±0.50	±0.70	±1.00	±2°

6. RoHS Compliance

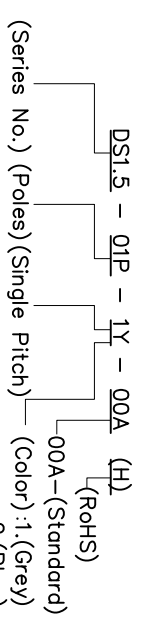

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	
REV	DO
SHEET	1/1
SCALE	1:1

A 8 7 6 5 4 3 2 1