

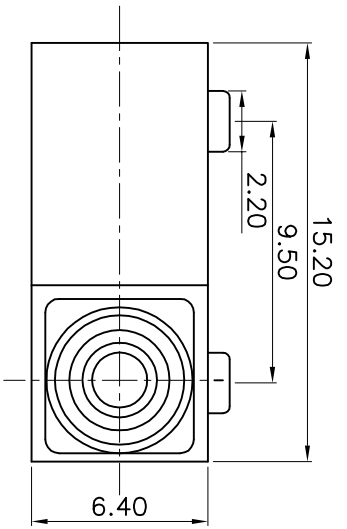
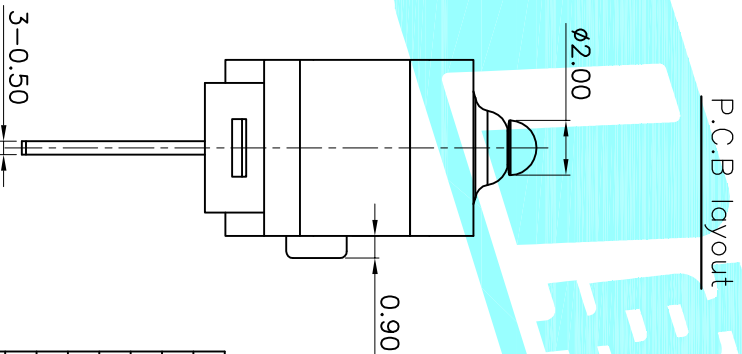
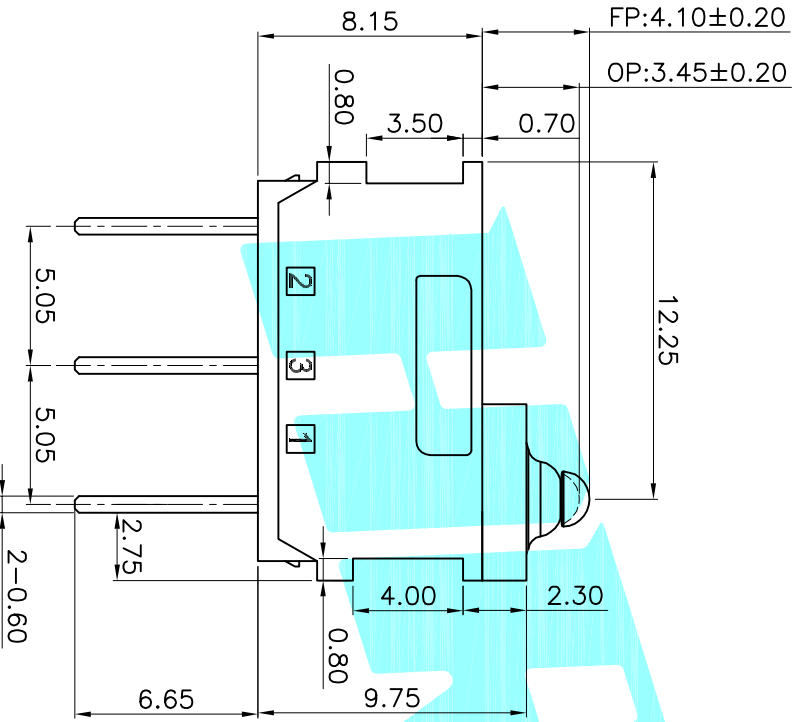


INGRESS PROTECTION:IP67



Circuit Diagram





















- NOTE:
1. Rating1: DC12V 3A
Rating2: 48VDC/125VAC/250VAC 0.1A
 2. Operating force:75±30gf&130±30gf
 3. Electric Life:10,000
 4. Mechanical Life:1,000,000



⑦	Shrapnel	1	Brass	Plating silver	
⑥	Contact	1	Ag		
⑤	Sealed Circle	1	Silicone Rubber		
④	Terminal	3	Brass(0.50t)	Plating silver	
③	Plunger	1	POM	Black	
②	Cose	1	PA	Black	
①	Cover	1	PA	Black	

APPROVALS	DATE	ELECTRONICS CO.,LTD	
DRAWN	J.X.Zhang	MICRO SWITCHS	
CHECKED	2018/8/1	K9-1802B	
APPROVALS			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	30±0.30	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROD.	SHEET 1 OF 1
	A		NEW				10~30	±0.20		±2°				

						
A	B	C	D	E	F	G
						
H	I	J	K	L	M	N
						
O	P	Q	R			

NO. : 1

APPROVALS		DATE		 ELECTRONICS CO.,LTD	
DRAWN	J.X.Zhang		2018/8/1		
CHECKED				TITLE: MICRO SWITCHS	
APPROVALS				PART NO. K9-1802□	
TOLERANCES ARE		30 ^{±0.15}	±0.30	ANGLE	
		10 ^{±0.10}	±0.20		UNIT: mm
		5 ^{±0.05}	±0.15	±2°	SCALE: 1:1
		~ 5	±0.10		DRAWING NO.
					PROJ. 
					SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			