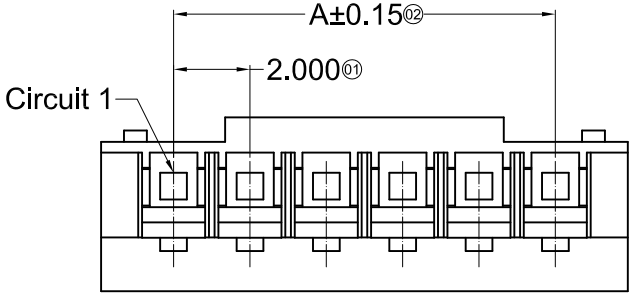

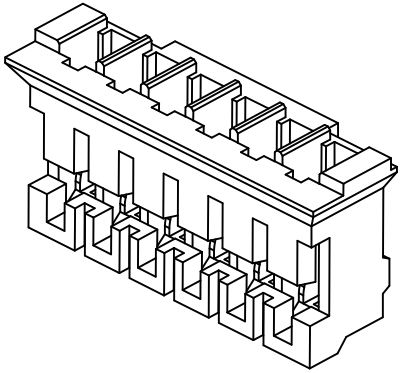

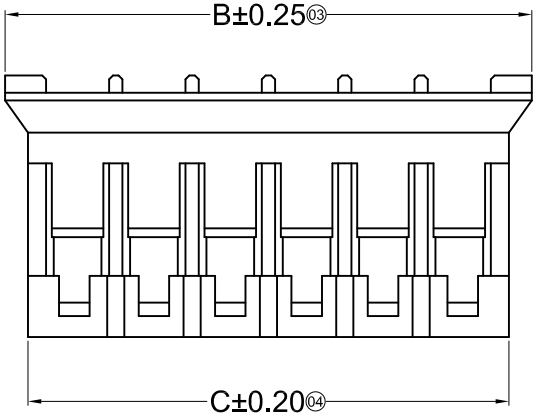

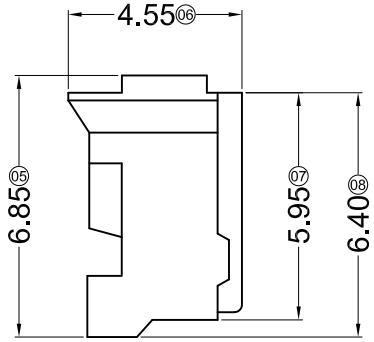

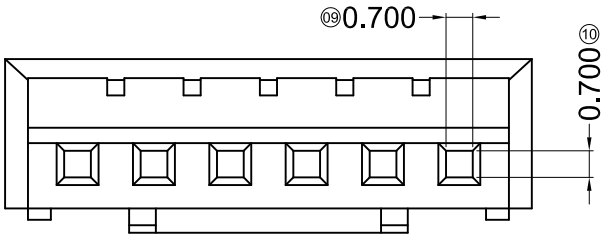

■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing：≤20mΩ

X2016 H X-XX X-N0 HF-C
① ②③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category：H-HSG
③ Appearance type：Blank-Ordinary
④ Row No.-Pin No.: XX-02P~20P
⑤ Plug the Pin & special No.：Blank-Ordinary
⑥ Material：N0-PA66 94V-0 N2-PA66 94V-2
⑦ HF-Halogen Free
⑧ C-Glowing Filament ;

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	5.80	4.60	12	22.00	25.80	24.60
03	4.00	7.80	6.60	13	24.00	27.80	26.60
04	6.00	9.80	8.60	14	26.00	29.80	28.60
05	8.00	11.80	10.60	15	28.00	31.80	30.60
06	10.00	13.80	12.60	16	30.00	33.80	32.60
07	12.00	15.80	14.60	17	32.00	35.80	34.60
08	14.00	17.80	16.60	18	34.00	37.80	36.60
09	16.00	19.80	18.60	19	36.00	39.80	38.60
10	18.00	21.80	20.60	20	38.00	41.80	40.60
11	20.00	23.80	22.60				

△			
X2016H-02-N2	PA66 UL 94V-2	X2016T	X2016W
X2016H-XX-N0HF	PA66 UL 94V-0 Halogen Free		
X2016H-XX-N0	Nylon 66 UL 94V-0		
PART N0	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司
Authorized Signature(s)

MARK	DESCRIPTION	DATE	REVISED	APPROVED
△ X				
△ X				
△ X				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGULAR	±5°
L≤4	±0.2
4<L≤16	±0.3
16<L≤63	±0.4
L>63	±0.5

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm
APPD		DATE		SIZE: A4

XKB INDUSTRIAL PRECISION CO.,LIMITED

MODEL TYPE: X2016H-XX-N0XX
PART NO.: 2.00mm Crimp Style Connectors
DWG NO.:

WEIGHT	SHEET	REVISION
1.0g	1/1	A0