

HXA *Upgrade!*
Series

- High reliability and high voltage are realized by hybrid electrolyte
- Endurance with ripple current : 4,000 hours at 125°C
- For high temperature and high reliability applications.
(Automotive equipment, Base station equipment, etc.)
- RoHS2 Compliant
- Halogen Free
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.

HXA

↑ Higher temperature
HXB




◆ SPECIFICATIONS

Items	Characteristics								
Category Temperature Range	-55 to +125°C								
Rated Voltage Range	80V _{dc}								
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)								
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C: Nominal capacitance(μF), V : Rated voltage(V) (at 20°C after 2 minutes)								
Dissipation Factor (tan δ)	Rated voltage(V _{dc}) 80V tan δ (Max.) 0.08 (at 20°C, 120Hz)								
Low Temperature Characteristics (Max. Impedance Ratio)	Z(-25°C)/Z(+20°C) ≤ 1.5 Z(-55°C)/Z(+20°C) ≤ 2.0 (at 100kHz)								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 4,000 hours at 125°C. <table border="1"> <tr> <td>Capacitance change</td> <td>≤ ±30% of the initial value</td> </tr> <tr> <td>D.F. (tan δ)</td> <td>≤ 200% of the initial specified value</td> </tr> <tr> <td>ESR</td> <td>≤ 200% of the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>≤ The initial specified value</td> </tr> </table>	Capacitance change	≤ ±30% of the initial value	D.F. (tan δ)	≤ 200% of the initial specified value	ESR	≤ 200% of the initial specified value	Leakage current	≤ The initial specified value
Capacitance change	≤ ±30% of the initial value								
D.F. (tan δ)	≤ 200% of the initial specified value								
ESR	≤ 200% of the initial specified value								
Leakage current	≤ The initial specified value								
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4. <table border="1"> <tr> <td>Capacitance change</td> <td>≤ ±30% of the initial value</td> </tr> <tr> <td>D.F. (tan δ)</td> <td>≤ 200% of the initial specified value</td> </tr> <tr> <td>ESR</td> <td>≤ 200% of the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>≤ The initial specified value</td> </tr> </table>	Capacitance change	≤ ±30% of the initial value	D.F. (tan δ)	≤ 200% of the initial specified value	ESR	≤ 200% of the initial specified value	Leakage current	≤ The initial specified value
Capacitance change	≤ ±30% of the initial value								
D.F. (tan δ)	≤ 200% of the initial specified value								
ESR	≤ 200% of the initial specified value								
Leakage current	≤ The initial specified value								

◆ DIMENSIONS [mm]


- Terminal Code : A
- Size code : HA0 and JA0
- Terminal Code : G (Vibration resistant structure)
- Size code : HA0 and JA0

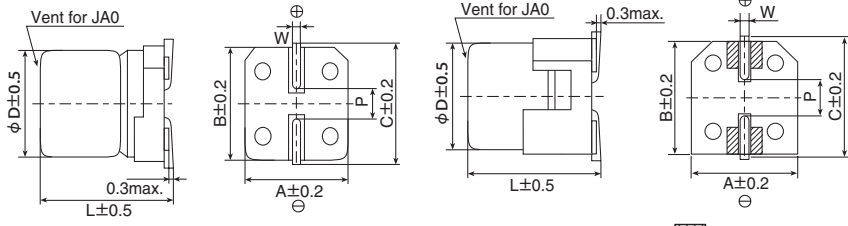

Size Code	φD	L	A	B	C	W	P
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

▨ : Dummy terminals

◆ PART NUMBERING SYSTEM

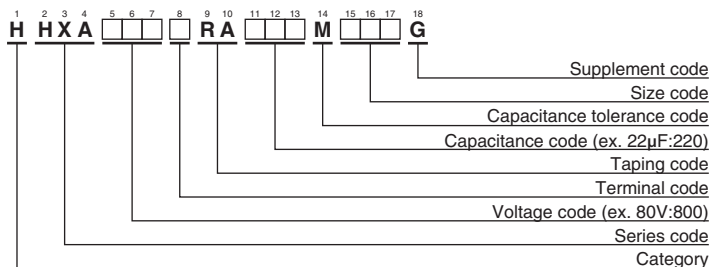

Please refer to "Product code guide (conductive polymer hybrid type)"

◆ MARKING



- Rated voltage symbol

Rated voltage (V _{dc})	Symbol
80	K



◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	ESR (mΩ max./20°C, 100kHz)	Rated ripple current (mA _{rms} /125°C, 100kHz)	Part No.
80	22	HA0	45	1,100	HHXA800□RA220MHA0G
	39	JA0	35	1,200	HHXA800□RA390MJA0G
	47	JA0	33	1,700	HHXA800□RA470MJA0G

□ : Enter the appropriate terminal code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Capacitance(μF) \ Frequency(Hz)	120	1k	5k	10k	20k	30k	100k to 500k
22	0.07	0.30	0.50	0.60	0.70	0.75	1.00
39 to 47	0.10	0.40	0.60	0.70	0.80	0.80	1.00