

Part No	Material	Process
TYPEC-304-ARP16	不锈钢	3次 Molding
TYPEC-304-BRP16	不锈钢	1次 Molding
TYPEC-304-CRP16	磷铜	1次 Molding

PIN#	NAME	PIN#	NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND






备注:

电气特性/Electrical:

- 1.额定电流: 3A MIN ROR VBUS
0.25A MIN FOR OTHER
- 2.接触阻抗: 40 MILLIOHMS MAX
- 3.绝缘阻抗: 100MEGA OHMS MIN
- 4.耐压测试: 250V AC
- 5.插拔力: MATE FORCE: 10.0N(MAX)
- 6.使用寿命: 10,000次
- 7.工作温度: -55°C ~ 85°C

原材料/Material:

- 1.塑胶: LCP+30%G.F UL94V-0
- 2.端子: Copper Alloy C5191
- 3.外壳: 不锈钢SUS304 T=0.30MM

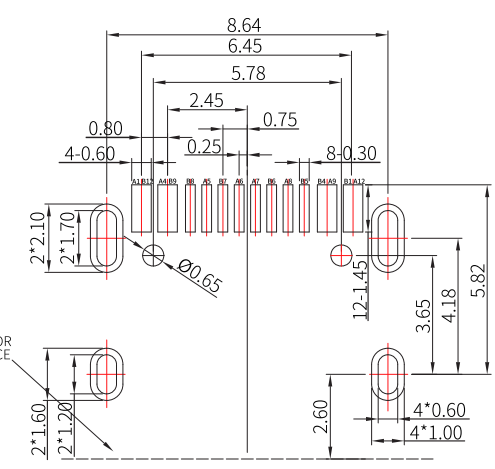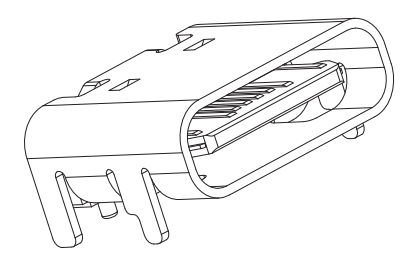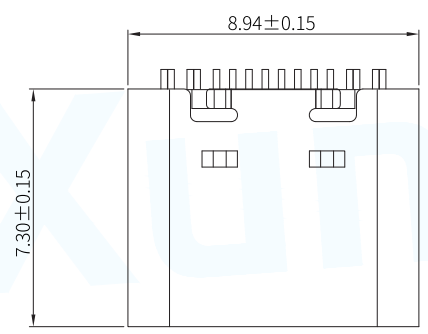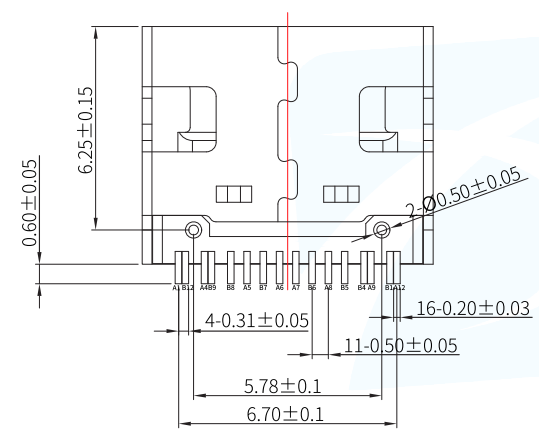

RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:USB C TYPE 母座单排16P SMT 四脚插板		
DECIMALS:	ANGLES:		PAR	TYPEC-304-BCP16	
X:±0.5	X:±2°		DWN	KING	2013.11.08
X.X:±0.3	X.X:±1°		CHKD	APVD	
X.XX:±0.2		SCALE 1:1	UNIT: mm		
		CUSTOMER COPY	SIZE:A4	SHEET:1F1	REV:A