


HSF

NOTES:


Rated Current: 9.0A
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C
 Insulator Material: PA66 UL94V-0
 Used with: WF4202-T(Female Terminal)

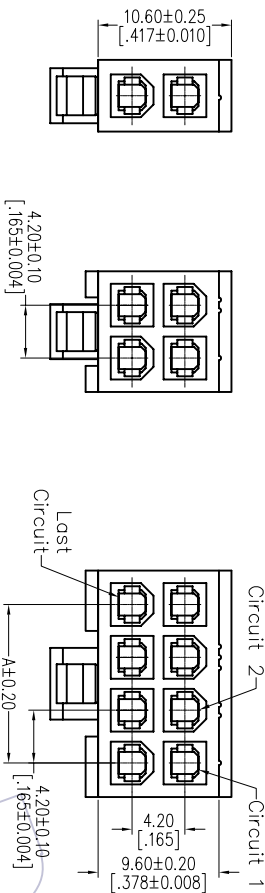

Ordering Information

WF4202-2 H XX W 01

No. of Row No. of pins Color Packing
 Dual Row 01P~12P W=White 0=PE Bag
 B=Black

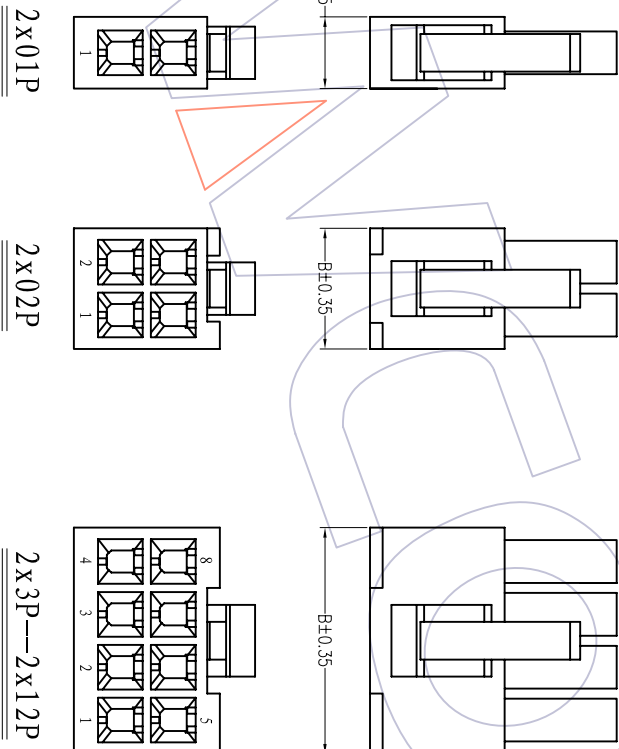

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x01	WF4202-2H01W01	---	5.70
2x02	WF4202-2H02W01	4.20	9.60
2x03	WF4202-2H03W01	8.40	13.80
2x04	WF4202-2H04W01	12.60	18.00
2x05	WF4202-2H05W01	16.80	22.20
2x06	WF4202-2H06W01	21.00	26.40
2x07	WF4202-2H07W01	25.20	30.60
2x08	WF4202-2H08W01	29.40	34.80
2x09	WF4202-2H09W01	33.60	39.00
2x10	WF4202-2H10W01	37.80	43.20
2x11	WF4202-2H11W01	42.00	47.40
2x12	WF4202-2H12W01	46.20	51.60

OPERATION

DRAW

DATE

SCALE

FIT

PART NO.

SEE TAB

TITLE:

4.20 HOUSING DUAL ROW

XX

JYHuang

2012/09/17

mm

A4

Customer NO.

4.20 HOUSING DUAL ROW

SIZE

Customer NO.

±0.40

CHECK

DATE

UNIT

1/1

4.20 HOUSING DUAL ROW

SIZE

Customer NO.

Customer NO.

±0.25

APPROVE

DATE

PROJ.

1/1

4.20 HOUSING DUAL ROW

SIZE

Customer NO.

Customer NO.

±0.15

ANGLE

DATE

PROJ.

1/1

4.20 HOUSING DUAL ROW

SIZE

Customer NO.

Customer NO.

±3°

APPROVE

DATE

PROJ.

1/1

4.20 HOUSING DUAL ROW

SIZE

Customer NO.

Customer NO.

±0.15

APPROVE

DATE

PROJ.

1/1

4.20 HOUSING DUAL ROW

SIZE

Customer NO.

Customer NO.

±3°

APPROVE

DATE

PROJ.

1/1

4.20 HOUSING DUAL ROW

SIZE

Customer NO.

Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan

WCON-Kunshan

Tel: +86 769 85358920

Tel: +86 512 57468408

Fax: +86 769 85358915

Fax: +86 512 57468468

E-mail: sales@wcon.com

E-mail: sales@wcon.com