
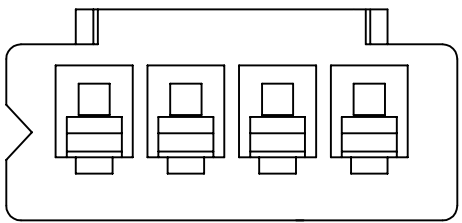
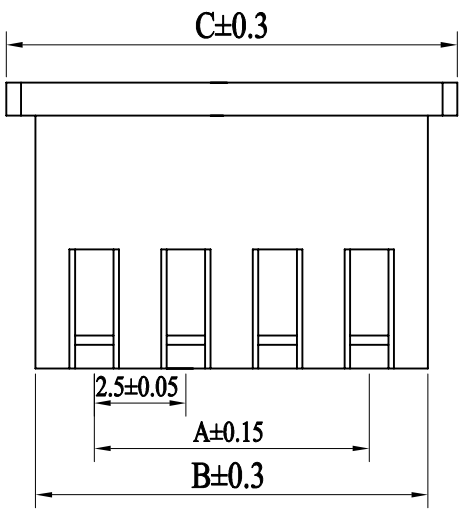
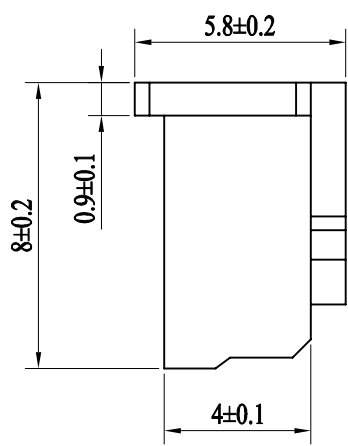
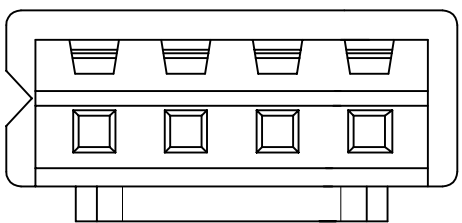


1 2 3 4 5 6 7 8

A
B
C
D
E
F

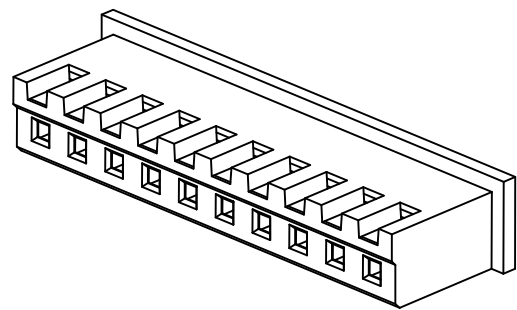

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

X8821 H X-XX X-N0 XX

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-Ordinary
- ④ Row No.-Pin No.: XX-Single Row
- ⑤ Plug the Pin & Special No. Blank-Ordinary
- ⑥ Material : N0-PA66 94V-0 N2-PA66 94V-2
- ⑦ Color: Blank : Natural Color

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.5	5.7	7.5	10	22.5	25.7	27.5
03	5.0	8.2	10.0	11	25.0	28.2	30.0
04	7.5	10.7	12.5	12	27.5	30.7	32.5
05	10.0	13.2	15.0	13	30.0	33.2	35.0
06	12.5	15.7	17.5	14	32.5	35.7	37.5
07	15.0	18.2	20.0	15	35.0	38.2	40.0
08	17.5	20.7	22.5	16	37.5	40.70	42.5
09	20.0	23.2	25.0				

X8821H-XX-N0	Nylon 66 UL 94V-0	X8821T	X8821W、8821HF
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

△ X					ANGULAR	± 5°
△ X					L ≤ 4	± 0.2
△ X					4 < L ≤ 16	± 0.3
△ X					16 < L ≤ 63	± 0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	± 0.5

DSND	DATE	SCALE: N/A	MODEL TYPE: X8821H-XX-N0
DWN	DATE	VIEW:	PART NO.: 2.50mm Crimp style Connector
CHKD	DATE	UNIT: mm	DWG NO.:
APPD	DATE	SIZE: A4	

REVISIONS
Authorized Signature(s)

XKB INDUSTRIAL PRECISION CO., LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

1 2 3 4 5 6 7 8