环保物料

TEL:0769-82001899

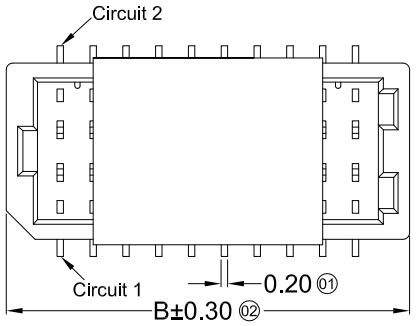

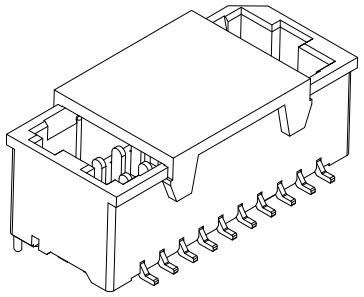

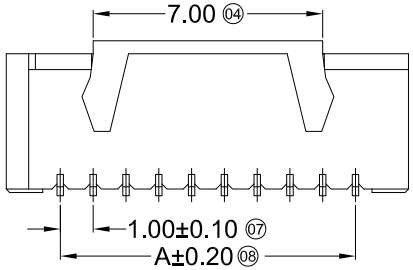



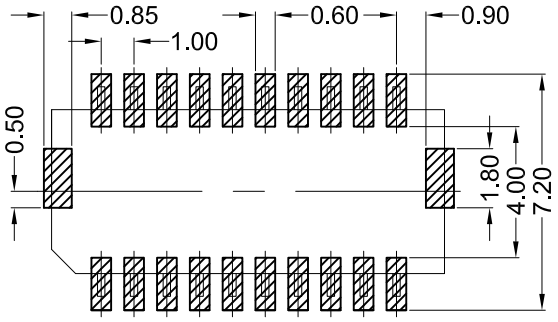

Recommand PCB Layout
General Tolerance±0.05

SPECIFICATIONS

1.Voltage rating: 50V AC, DC
2.Current rating: 1A, AC, DC
3.Withstanding Voltage: 500V AC/minute
4.Insulation resistance:100MΩ min
5.Temperature range: -25 ° C-+85 ° C
6.Contact resistance: 20mΩ max
WAFER
Housing Material: PA9T UL 94V0
Pin Material: Phosphor Bronze or Brass
Contact Area Plating: Plated Tin or Plated Gold
Mates with :P1010 series Housing
Poles:02-20P
Part No.: M1010VS-2xXX-9T-R

R=卷装 无=管装

Pin位数

Poles	Dimensions(mm)	
	A	B
10	4.00	7.30
12	5.00	8.30
16	7.00	10.30
20	9.00	12.30
30	14.00	17.30
40	19.00	22.30
50	24.00	27.30

WWW.XFCONN.COM

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X° .	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME	1.00mm Crimp Style Connectors
PART. NO.	M1010VS-2xXX-9T

SHEET	1/1
DATE	2010.4.12
UNITS	mm
SCALE	1:1
DWG NO.	009