


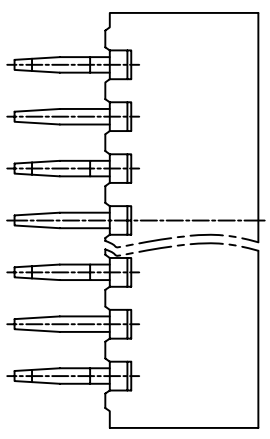
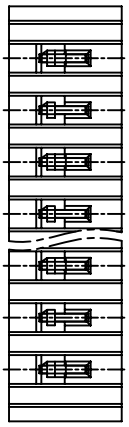
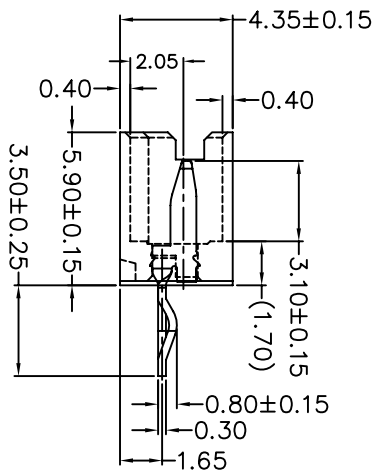
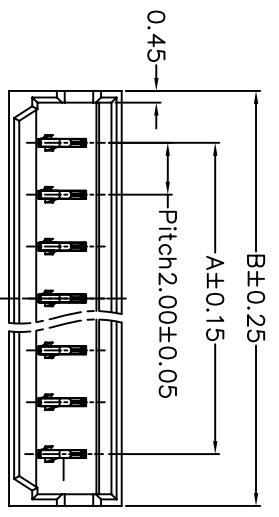



REV.	ECON NO.	DESCRIPTION	DATE	DESIGN



Poles	Dimensions	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

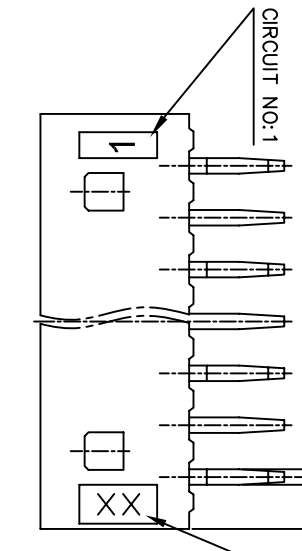

$\phi 0.80^{+0.02}$   
 $2.00 \pm 0.05$   
 RECOMMENDED P.C. BOARD HOLE DIM.  
 THICKNESS 1.6MM

DIM	TOL	DIM	TOL
X	/	X	/
X.X	0.25	X.X'	
X.XX	0.15	X.XX'	
X.XXX	0.10	X.XXX'	

- SPECIFICATIONS**
- 1) MATERIAL:**  
 HOUSING: GLASS FILLED PA66 UL94V0  
 TERMINAL: PHOSPHOR BRONZE, TIN PLATING
- 2) Current rating: 3A AC/DC.**
- 3) VOLTAGE RATING: 125V AC/DC**
- 4) CONTACT RESISTANCE: 20M OHMS MAX**
- 5) INSULATION RESISTANCE: 1000M OHMS MIN.**
- 6) TEMPERATURE RANGE: -40~+105°**

**CNJM** Joint More Precision electronics Co., Ltd.

DRAW NO.	DATE	P/N NO.	DRAW NAME:
DESIGN: 陈雪峰	2019.1.20	CNJM2004W-NP	20mm pitch 180° wfer
CHECK: 杨焯			
REVIEW:		REV. A/1	SCALE 1:1
		UNIT: mm	SHEET: 1 OF 1