
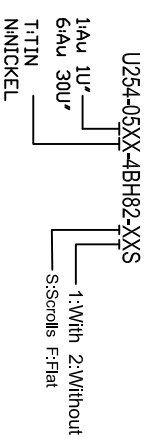
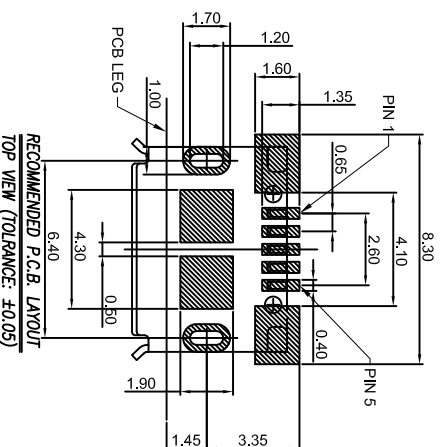




Scrolls (S)

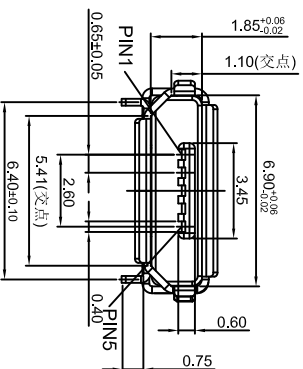

Material
 Housing Material: LCP, UL94V-0, black
 Contact Terminal: Copper Alloy
 Metallic Shell: Sus
Electrical
 Voltage Rating: 30 V AC
 Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A
 Contact Resistance: 30mΩ Max
 Insulation resistance: 1000MΩ Min
 Dielectric withstanding voltage: 250V AC/Minute
Mechanical
 Durability: 10,000 cycles
 Mating Force: 35N (3.57Kgf) Max
 Umating Force: 8N (0.82Kgf) Min.

REVISIONS		UNSPECIFIED TOLERANCES	
Δ X	DESCRIPTION	DATE	APPROVED
Δ X			
Δ X			
MARK			

DSND	DATE	SCALE: N/A	MODEL TYPE: MICRO USB
DWIN	DATE	VIEW: ②	PART NO.: U254-05XX-4BH82
CHKD	DATE	UNIT: mm	DWG NO.: U254-05XX-4BH82-XXS
APPD	DATE	SIZE: A4	WEIGHT 1.0g
XKB INDUSTRIAL PRECISION CO., LIMITED			SHEET 1/1
			REVISION A0