
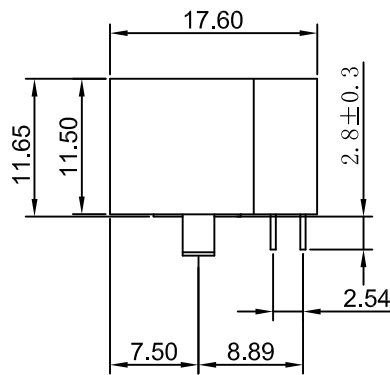
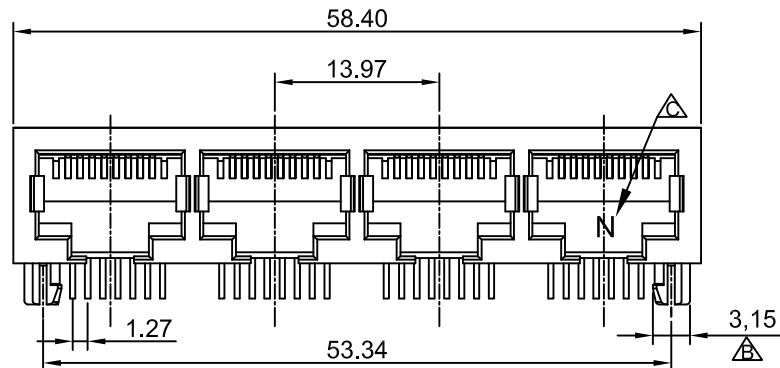


CUSTOMER DRAWING



版次 REV	ECN编号	设变内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A		初版发行	27-SEP-17	DOREN	DDS
B		UPDATE POST	31-JAN-18	DOREN	DDS
C		ADD "N" LOGO	28-FEB-18	DOREN	DDS

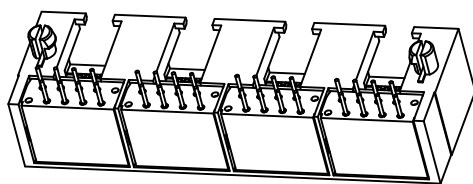

RB 0 00 - ZZ 1 - 1 0 1 - 003B

系列码 全塑
ZZ:无灯

塑胶码 1:PBT黄色
8P8C DIP脚长2.8
1:GOLD FLASH

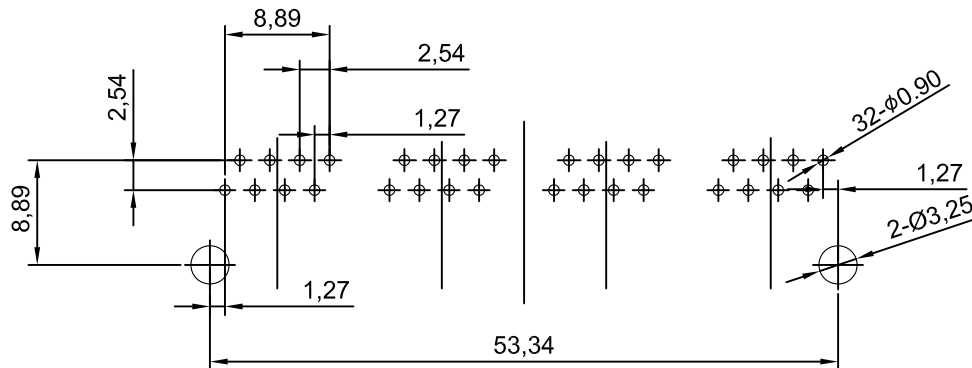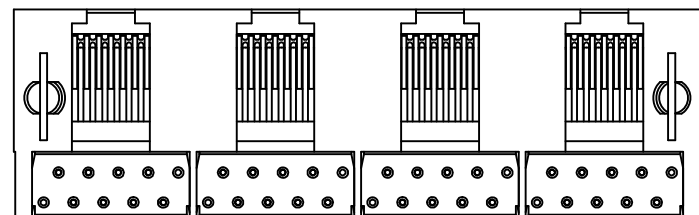

PCB LAYOUT
TOL:±0.05

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 40 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100 VDC.
- DIELECTRIC STRENGTH : 500V DC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

- HOUSING & INSERT MATERIAL : HIGH TEMPERATURE PLASTIC UL94V-0.
- CONTACT MATERIAL : ∅.46 PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
- MATING/UNMATING FORCE : 2.04 KG. F MAX.
- OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE : -10°C ~ +40°C RELATIVE HUMIDITY<70%.
- OPERATION : -40°C ~ +70°C.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF GMA AND SHALL BE COPIED OR NOT BE REPRODUCED, CUELED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF GMA.	DIMENSION IN mm [Inch]		gma 东莞市国满电子科技有限公司 GMA TECHNOLOGY CO., LTD.	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		料号 FILE NO.	图号 DWG NO.
	.X± 0.38	X° ± 3°	RB000-ZZ1-101-003B	RB003B-2
	.XX± 0.25	.X° ± 2°	名称 TITLE	
	.XXX± 0.15	.XX° ± 1°	5622 1X4全塑DIP脚长2.8	
核准 APPROVE	审核 CHECK	制图 DRAW	角法 PROJ.	张数 SHEET
ZILL	DDS	DOREN	比例 SCALE 1:1	图纸 SIZE A4
				版次 REV B