CUSTOMER DRAWING

版次 REV.	ECN编号 ECN NUMBER	设变内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A		初版发行	08-JUN-13	DOREN	DDS
B	ECN1505002	依实物修正图面	28-MAY-15	DOREN	DDS
C	ECN1704001	UPDATE △A	01-APR-17	DOREN	DDS





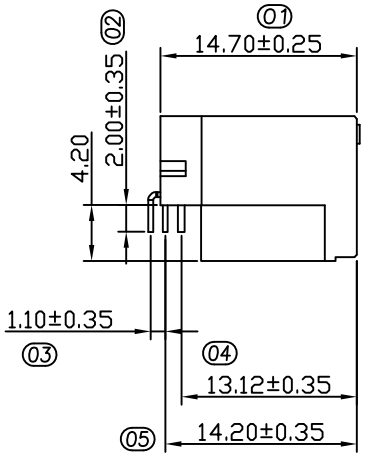

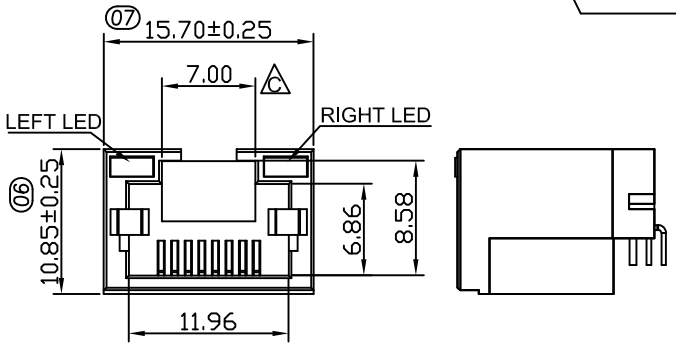

脚位尺寸以过孔规为准

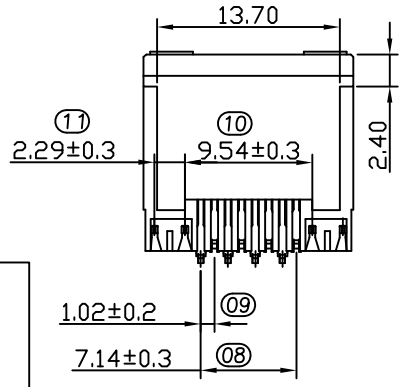

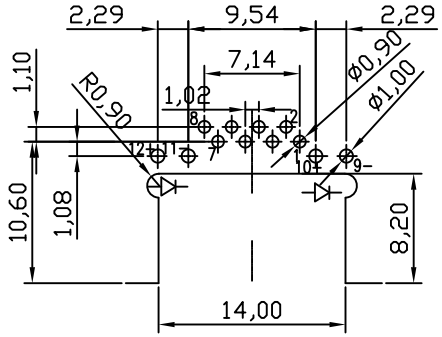

PCBLAYOUT TOP VIEW
TOL:±0.05

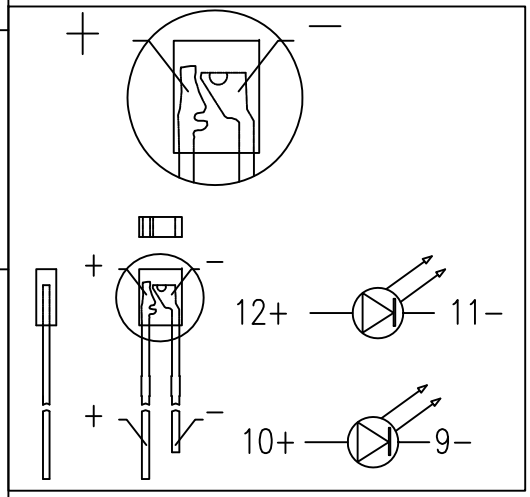



NOTES:
1. HOUSING MATERIAL:GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL:COPPER ALLOY,T=0.35.
3. PLATING: GOLD PLATED ON CONTACT AREA, 100u"MIN. TIN PLATED ON SOLDERING AREA, 50u"MIN. NICKEL PLATED OVERALL.
4. LED:T=0.50, TIN PLATED.

ELECTRICAL:
1. VOLTAGE RATING: 125V AC RMS.
2. CURRENT RAING: 1.5AMP.
3. CONTACT RESISTANCE: 30MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.

MECHANICAL:
1. DURRABILITY: 750 CYCLES MIN.
2.INSERTION FORCE : 22N MAX.
3.REMOVAL FORCE(WITHOUT PLUG LOCK) : 22N MAX.

ENVIRONMENTAL:
1. STORAGE: -40°C~85°C
2. OPERATION: 0°C~70°

*Apply to the EU standards(ROSH)

1. 01~11FOR QIP DIM.

RJ3 0 0-A X X-2 00-0R

- SERIES CODE
- SHELL CODE: 0=W/O SHELL
- SPRING: 0=W/O All SPRING
- LED POLARITY CODE: A=POSITIVE
- LED CODE: 2=Left:YELLOW/Right:GREEN; 7=Left:GREEN/Right:YELLOW; 9=Left:GREEN/Right:Orange
- PLATING CODE: 1=G/F; 8=3u" Au; A=5u" Au; B=6u" Au; 7=15u" Au; 3=30u" Au
- INPUT PIN CODE: 2=DIP脚长2.0

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF GMA AND SHALL COPIED OR NOT BE REPRODUCED CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF GMA

DIMENSION IN mm [Inch]	
TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X± 0.35	X°.± 3°
.XX± 0.25	.X°± 2°
.XXX± 0.15	.XX°± 1°
核准APPROVE ZILL	审核 CHECK DDS

GMA 东莞市国满电子科技有限公司 Dongguan Guoman Electronic Technology Co.,Ltd.

料号 FILE NO. RJ300-AXX-200-0R	图号 DWG NO. C-RJ300-A
名称TITLE RJ45 沉板4.2 DIP全塑带灯	
制图 DRAW DOREN	角法 PROJ.
比例 SCALE 1:1	张数 SHEET 1/1
图纸 SIZE A4	版次 REV C