CUSTOMER DRAWING

版次 REV.	ECN编号 ECN NUMBER	设变内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A		初版发行	21-MAR-14	DOREN	DDS
B		依实物修正图面	01-JUL-17	DOREN	DDS
C		UPDATE △C	05-NOV-17	DOREN	DDS

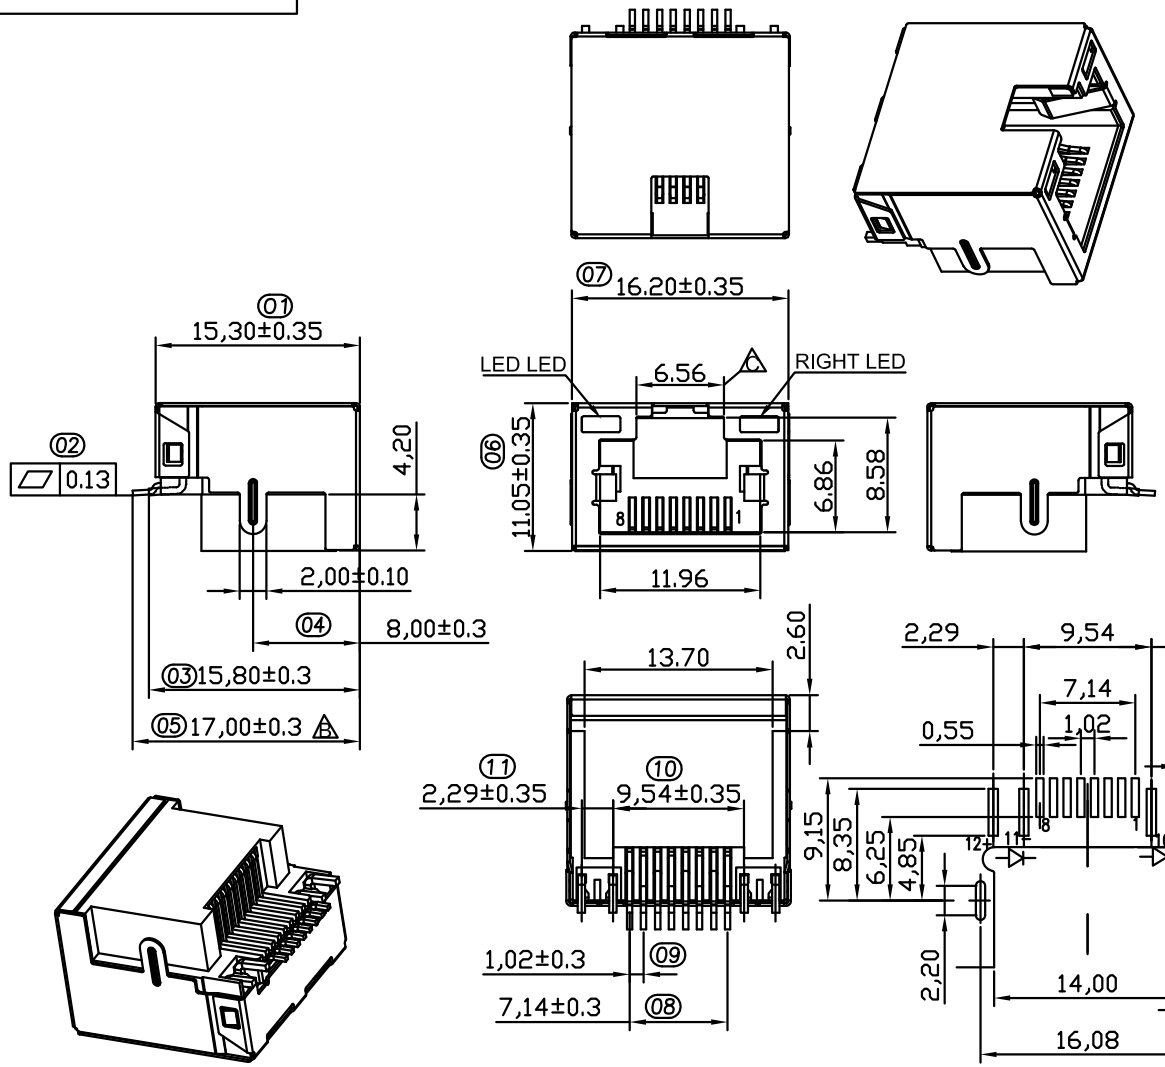

PCBLAYOUT TOP VIEW

TOL:±0.05

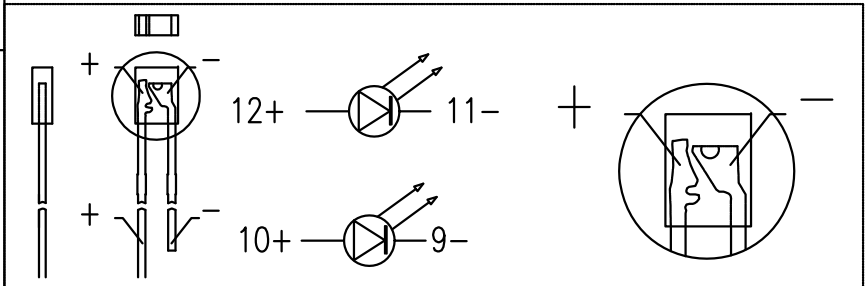

NOTES

MATERIAL

1. HOUSING MATERIAL	: GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL	: COPPER ALLOY, T=0.35. .
3. PLATING	: GOLD FLASH PLATING OVER NICKEL.
4. SHIELD	: 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
5. LED	: SPCC T=0.50, TIN PLATED.

ELECTRICAL

1. VOLTAGE RATING	: 125 VAC RMS.
2. CURRENT RATING	: 1.5 AMP.
3. CONTACT RESISTANCE	: 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE	: 500 MEGOHMS MIN @ 100V DC .
5. DIELECTRIC DIELECTRIC RESISTANCE	: 500V DC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY	: 750 CYCLES MIN.
2. MATING/UNMATING FORCE	: 2.04 KG.F MAX.

ENVIRONMENTAL:

1. STORAGE	: -40℃～+85℃.
2. OPERATION	: 0° C TO 70° C.

1. 01~11 FOR QIP DIM.

RJ3 1 0-A 2 1-A 00-0R

- SERIES CODE
- SHELL CODE: 1-W SHELL
- SPRING: 0-W/O All SPRING
- LED POLARITY CODE: A-POSITIVE
- LED CODE: 2-Left:YELLOW/Right:GREEN
- PLATING CODE: 1-G/F, 8-3u"
- INPUT PIN CODE: A-SMT

PIN序	说明
8	
7	
6	RX-
5	
4	
3	RX+
2	TX-
1	TX+

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF GMA AND SHALL NOT BE REPRODUCED,CUED COPIED OR IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF GMA

DIMENSION IN mm [Inch]

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X± 0.35	X° .± 3°
.XX± 0.25	.X° ± 2°
.XXX± 0.15	.XX° ±1°

核准APPROVE: ZILL

审核 CHECK: DDS

制图 DRAW: DOREN

GMA 东莞市国满电子科技有限公司 Dongguan Guoman Electronic Technology Co.,Ltd.

料号 FILE NO.: RJ310-A21-A00-0R

图号 DWG NO.: C-RJ310-AA0

名称TITLE: RJ45 沉板4.2 SMT直脚带灯

角法 PROJ.

图纸 SIZE A4

比例 SCALE 1:1

张数 SHEET 1/1

版次 REV C