

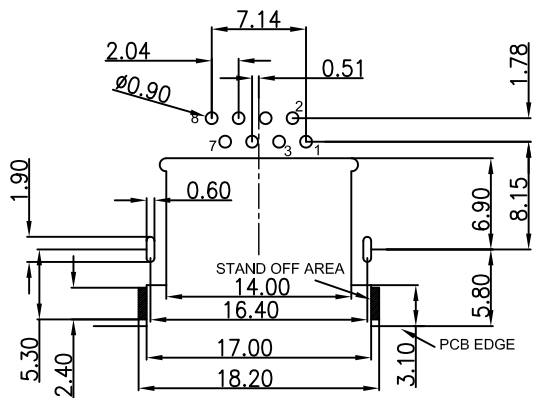
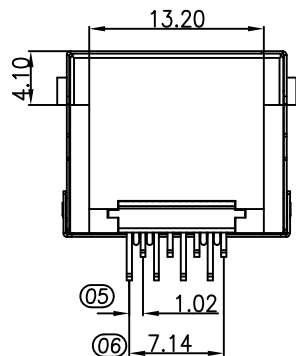

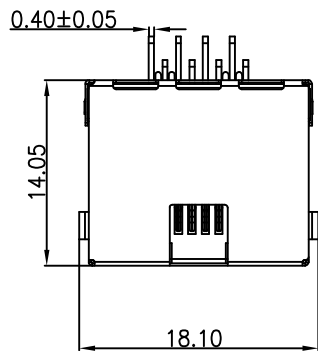



CUSTOMER DRAWING



PCBLAYOUT TOP VIEW  
TOL:±0.05(THICKNESS=1.60)

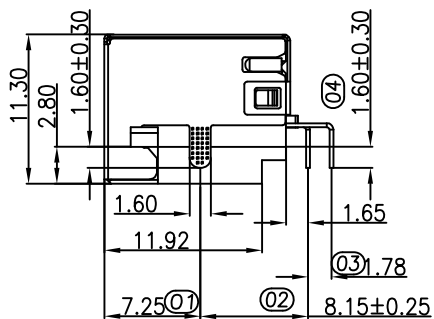

版次 REV.	ECN编号 ECN NUMBER	设定内容 MODIFICATION	日期 DATE	制图 DRAW	核准 APPROVE
A		初版发行	04-MAR-16	DOREN	DDS

- NOTES:
- HOUSING MATERIAL:GLASS FILLED POLYESTER UL94V-0.
  - CONTACT MATERIAL:COPPER ALLOY,T=0.30.
  - PLATING: GOLD PLATED ON CONTACT AREA, 100u"MIN. TIN PLATED ON SOLDERING AREA, 50u"MIN. NICKEL PLATED OVERALL.
  - SHELL:COPPER ALLOY,T=0.20. 30u"MIN. NICKEL PLATED OVERALL.
- ELECTRICAL:
- VOLTAGE RATING: 125V AC RMS.
  - CURRENT RAING: 1.5AMP.
  - CONTACT RESISTANCE: 40MILLIOHMS MAX.
  - INSULATION RESISTANCE: 500MEGOHMS MIN @100V DC.
- MECHANICAL:
- DURRABILITY: 750 CYCLES MIN.
  - INSERTION FORCE : 22N MAX.
  - REMOVAL FORCE(WITHOUT PLUG LOCK) : 22N MAX.
- ENVIRONMENTAL:
- STORAGE: -40°C~85°C
  - OPERATION: 0°C~70°
- \*Apply to the EU standards(ROSH)

1. (07)~(06)FOR QIP DIM.

RJ5 1 0-Z Z 1-2 0 X -0R

SERIES CODE  
SHELL CODE  
1-W SHELL

SPRING  
0-W/O ALL SPRING  
LED POLARITY CODE  
Z-W/O LED

LED CODE  
Z-W/O LED

0: 无LOGO

PLATING CODE  
1-G/F

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF GMA AND SHALL BE COPIED OR NOT BE REPRODUCED, CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF GMA	DIMENSION IN mm [Inch]		GMA 东莞市国满电子科技有限公司 Dongguan Guoman Electronic Technology Co.,Ltd.	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		料号 FILE NO.	图号 DWG NO.
	.X± 0.35	X°± 3°	RJ510-ZZ1-200-0R	RJ510-2
	.XX± 0.25	.X°± 2°	名称TITLE	
	.XXX± 0.15	.XX°± 1°	RJ45 沉板2.8 DIP脚长1.6	
核准APPROVE	审核 CHECK	制图 DRAW	角法 PROJ.	图纸 SIZE A4
ZILL	DDS	DOREN	比例 SCALE 1:1	张数 SHEET 1/1
				版次 REV A