

**NRSE Series**  
**SMD Shielded Tiny Power Inductor**  
**Size 4030**




**CHARACTERISTICS**

- Magnetic resin for higher current and semi-magnetically shielded
- Different sizes from 2mm to 8mm in square shape
- Quantity: 2000pcs


**APPLICATION**

- DC/DC converter
- LC filter

Dimensions: [mm]

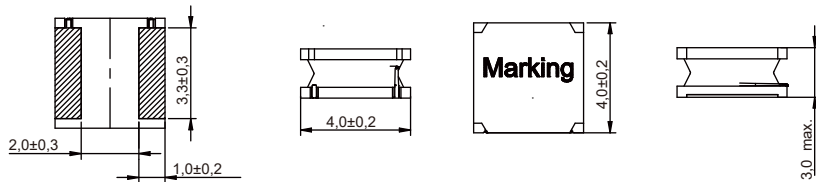

Land Pattern: [mm]



Electrical Properties:

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE4030-R47N	0.47	±30%	7.50	4.00	11
NRSE4030-R56N	0.56	±30%	6.00	4.00	14
NRSE4030-1R0N	1.0	±30%	5.90	3.40	15
NRSE4030-1R5N	1.5	±30%	4.85	3.30	25
NRSE4030-1R8N	1.8	±30%	4.25	3.20	30
NRSE4030-2R2M	2.2	±20%	4.10	2.95	35
NRSE4030-3R3M	3.3	±20%	3.30	2.40	40
NRSE4030-4R7M	4.7	±20%	2.90	2.00	60
NRSE4030-5R6M	5.6	±20%	2.75	1.95	70
NRSE4030-6R8M	6.8	±20%	2.60	1.70	75
NRSE4030-7R5M	7.5	±20%	2.20	1.65	90
NRSE4030-8R2M	8.2	±20%	2.10	1.60	100
NRSE4030-100M	10	±20%	1.95	1.50	115
NRSE4030-120M	12	±20%	1.70	1.35	140
NRSE4030-150M	15	±20%	1.65	1.15	190
NRSE4030-180M	18	±20%	1.40	1.10	215
NRSE4030-220M	22	±20%	1.30	1.00	225

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE4030-330M	33	±20%	1.10	0.84	330
NRSE4030-470M	47	±20%	0.90	0.72	500
NRSE4030-560M	56	±20%	0.85	0.65	560
NRSE4030-680M	68	±20%	0.75	0.55	750
NRSE4030-820M	82	±20%	0.68	0.50	950
NRSE4030-101M	100	±20%	0.60	0.45	1150
NRSE4030-151M	150	±20%	0.50	0.35	2350
NRSE4030-181M	180	±20%	0.40	0.35	2500
NRSE4030-221M	220	±20%	0.40	0.30	3000
NRSE4030-331M	330	±20%	0.30	0.23	4400
NRSE4030-471M	470	±20%	0.30	0.20	5500


Operating temperature : -40 C ~ +125 C

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40 C

Saturation Current that will cause initial inductance to drop approximately 30%

### Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

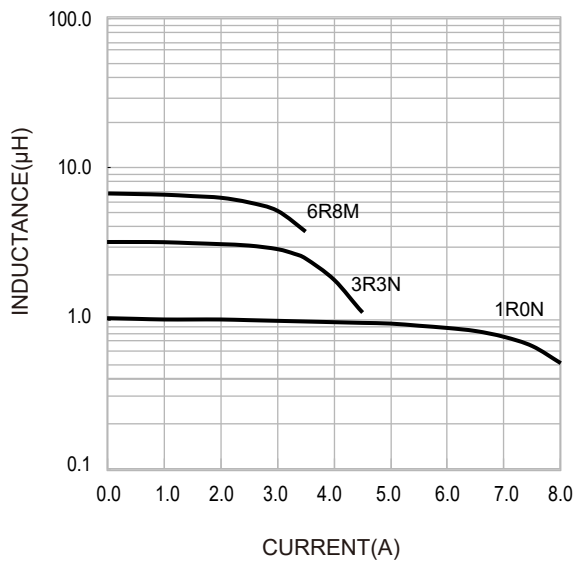

Temperature Rise VS. Current Characteristics:

