HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 35mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 500MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material: Phosphor Bronze
Contact Plating: Au and Sn over Ni
Shell Material: Zinc Alloy
Shell Plating: Ni 100u"
Fixing Material: Phosphor Bronze
Flxing Plating: Sn over Ni
Housing Material: PBT+30%G.F(UL94V−0)
Cover Material: PBT+30%G.F(UL94V−0)

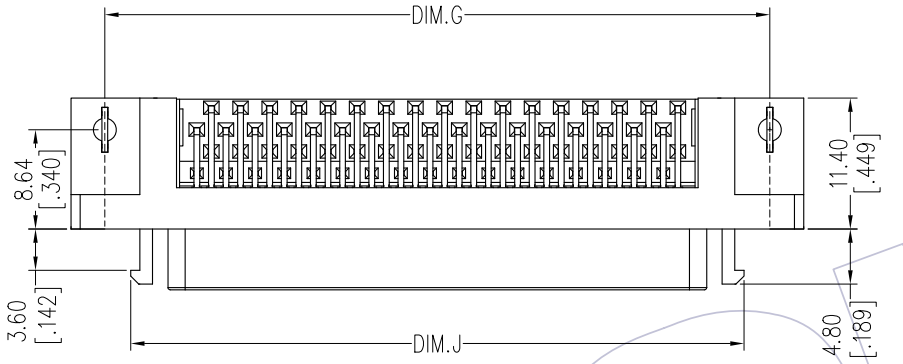

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

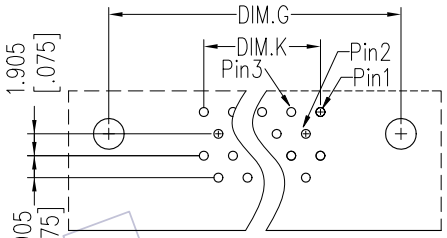

For 14、26、50pins

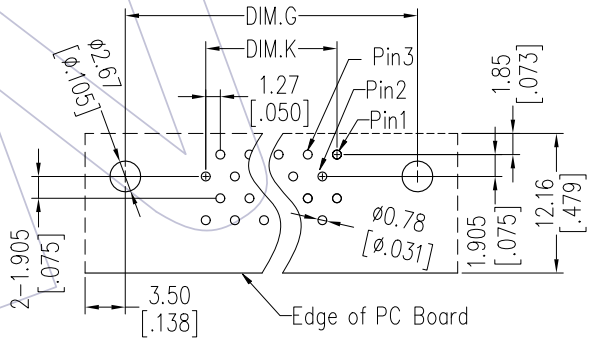

For 20、36、68pins

Ordering Information

6321- 0 XX R D SX M W A 01

No.of Pins: 14P 36P, 20P 50P, 26P 68P

Contact Plating: S1=3u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin

A=Tray

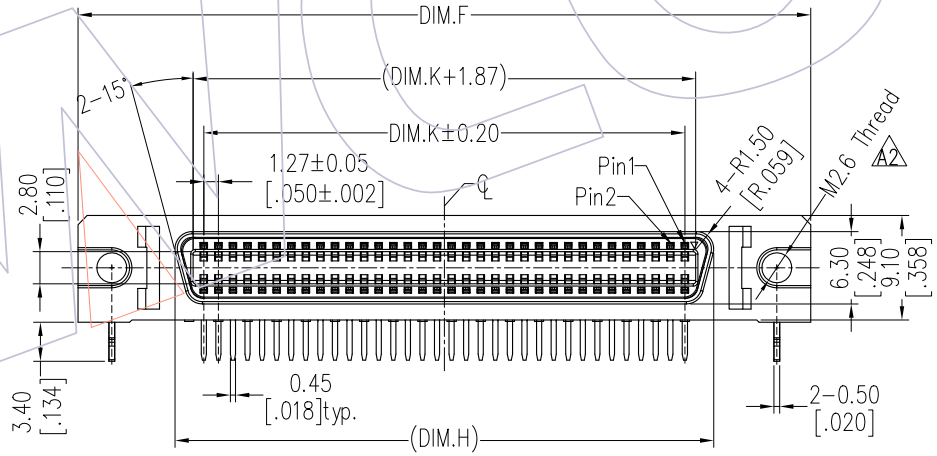

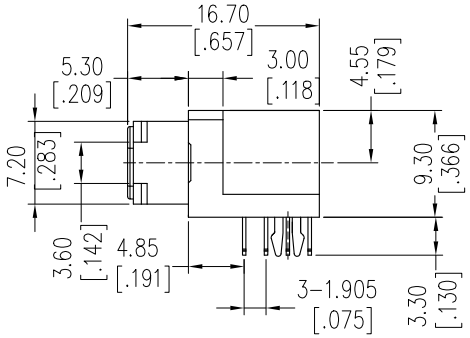

53.43	41.91	46.83	57.93	63.83	68		
42.00	30.48	35.40	46.50	52.40	50		
33.11	21.59	26.51	37.61	43.51	36		
26.76	15.24	20.16	31.26	37.16	26		
22.95	11.43	16.35	27.45	33.35	20		
19.14	7.62	12.54	23.64	29.54	14		
DIM.J	DIM.K	DIM.H	DIM.G	DIM.F	PIN数		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2019/11/18	Modify	------
A1	2013/08/28	Modify DIM.H	------
A0	2013/07/03	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW XSR	DATE 2019/11/18	SCALE	FIT
CHECK	DATE	UNIT	mm
APPROVE	DATE	SIZE	A4
		SHEET	1/2
		PROJ.	

PART NO. 6321-0XXRDSXMWA01

TITLE: 1.27PITCH CEN TYPE SCSI FEMALE DIP(鱼叉纵向)

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com