


PRODUCT: Power Inductor



SERIES: PSPCAQ32

产品封装: [Unit: mm] **Standard Packing Quantity: 3000 pcs/reel**

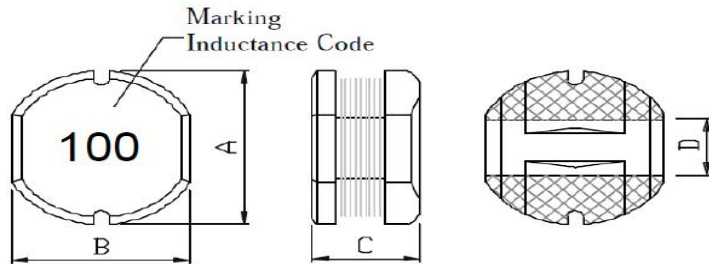

A	3.5±0.3
B	3.0±0.3
C	2.1±0.3
D	1.0Typ

GENERAL SPECIFICATIONS:

**RoHS
COMPLIANT**

P/N	感值 (μH)	精度 (±%)	DCR(Ω)	IDC (A)
			Typ.	Max.
PSPCAQ32-1R0M	1.00	20	0.070	2.080
PSPCAQ32-1R5M	1.40	20	0.090	1.860
PSPCAQ32-1R8M	1.80	20	0.110	1.800
PSPCAQ32-2R2M	2.20	20	0.130	1.390
PSPCAQ32-3R3M	3.30	20	0.170	1.250
PSPCAQ32-4R7M	4.70	20	0.210	1.130
PSPCAQ32-5R6M	5.60	20	0.220	0.910
PSPCAQ32-6R8M	6.80	20	0.250	0.850
PSPCAQ32-8R2M	8.20	20	0.280	0.820
PSPCAQ32-100M	10.00	20	0.320	0.740
PSPCAQ32-150M	15.00	20	0.350	0.600
PSPCAQ32-220M	22.00	20	0.500	0.580
PSPCAQ32-330M	33.00	20	0.800	0.400
PSPCAQ32-470M	47.00	20	1.190	0.360
PSPCAQ32-680M	68.00	20	1.730	0.300

PSPCAQ32-820M	82.00	20	1.990	0.280
PSPCAQ32-101M	100.00	20	2.520	0.250
PSPCAQ32-151M	150.00	20	3.360	0.190
PSPCAQ32-221M	220.00	20	5.800	0.160
PSPCAQ32-331M	330.00	20	9.240	0.130
PSPCAQ32-471M	470.00	20	12.000	0.084

备注:

- ◎ 测试频率:100KHz/0.25V
- ◎ 测试数据基于环境温度25°C取得
- ◎ 电感工作环境温度: -40°C~125°C, 产品最终承受温度不得高于125°C
- ◎ 如需参考产品开发测试数据, 请向我司索取单颗感值规格书



PROD TECHNOLOGY CO., LTD.

TEL :0755-86667379

<http://www.prodtech.cn>



E-LIVEN TECHNOLOGY CO., LTD.

NO.28 ho-cheng RD, bade city, taoyuan,
taiwan