

SPECIFICATIONS

Customer : _____

Customer P/N: _____ ACM- Series _____

Drawing No : _____

Quantity : 0 Pcs. Date : 2017/09/06

Chilisin P/N : _____ ACM- Series/参照 _____

SPECIFICATION ACCEPTED BY:	
COMPONENT ENGINEER	
ELECTRICAL ENGINEER	
MECHANICAL ENGINEER	
APPROVED	
REJECTED	

For Customer approval Only

Qualification Status: Full Restricted Rejected

Approved By	Verified By	Re-checked By	Checked By

Comments:

Meled Electronics Co., Ltd.

www.meledinc.com

Version change history

Rev.	Effective Date	Changed Contents	Change Reasons	Approved By
01	/	New release	/	/


1. Features

1. High common mode impedance at high frequency cause excellent noise suppression performance.
2. ACM series realizes small size and low profile.
3. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
4. Operating temperature-40~+125°C (Including self - temperature rise)

2.APPLICATIONS


- USB2.0 of IEEE1394, PC, peripheral equipments, small digital AV equipments, etc.
- LVDS lines of Note PC, LCD
- Audio lines

3 PRODUCT IDENTIFICATION

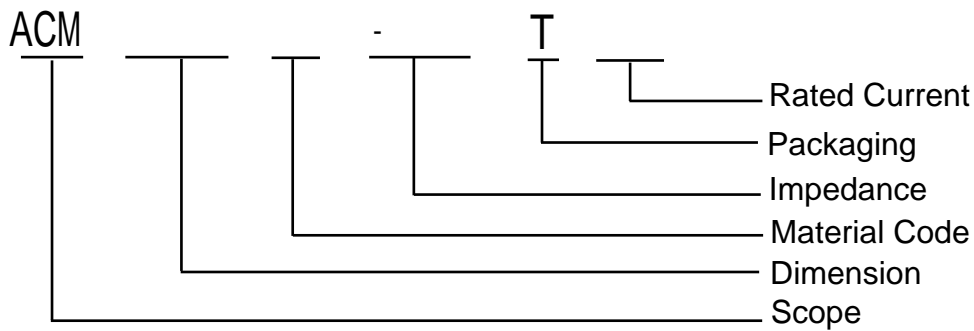

4. ShapeandDimensions

■ Dimensions

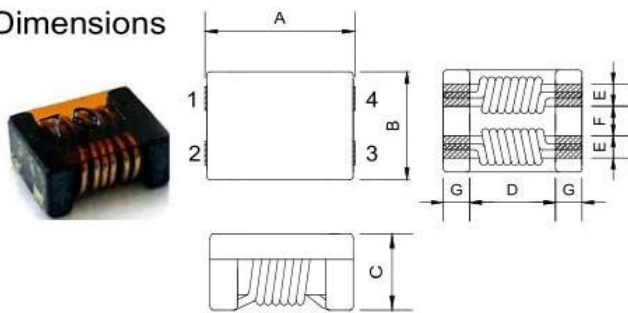


Dimensions	unit: mm
A	7.00±0.50
B	6.00±0.50
C	3.80 MAX
D	3.50 TYP.
E	1.50±0.50
F	1.50±0.50
G	1.70±0.50

[Table 4-1]

Unit: mm [inch]

Part Number	A	B	C	D	E	F	G
ACM4520	4.7±0.5	4.5±0.5	2.0 Max	2.7 Ref	0.7±0.2	1.2±0.2	1.0±0.2
ACM7060	7.0±0.5	6.0±0.5	3.8 Max	3.5 Ref	1.5±0.2	1.5±0.2	1.75±0.2
ACM9070	9.0±0.5	7.0±0.5	4.8 Max	5.7 Ref	1.5±0.2	2.0±0.2	1.70±0.2
ACM1211	12.0±0.5	10.8±0.5	6.4 Max	7.0 Ref	2.7±0.2	2.5±0.2	2.50±0.2
ACM1513	15.0±0.5	13.0±0.5	6.0 Max	10.4 Ref	2.7±0.2	3.8±0.2	2.30±0.2

5. Circuit Diagram

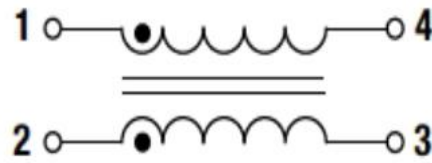

Appendix A: Electrical Characteristics

I. ACM4520 Series Common Mode Filter

Part Number	Z(Ω) at 100MHz		DCR Max. (m Ω)	I _{rated.} (A)	IR (M Ω) Min	Rated Voltage (V) Max
	Min	Typ.				
ACM4520□-301T30	100	300	45	3.0	10	50
ACM4520□-401T25	200	400	50	2.5	10	50
ACM4520□-701T22	500	700	59	2.2	10	50
ACM4520□-901T21	700	900	68	2.1	10	50
ACM4520□-102T21	800	1000	68	2.1	10	50
ACM4520□-122T20	1000	1200	74	2.0	10	50
ACM4520□-142T19	1200	1400	81	1.9	10	50

II. ACM7060 Series Common Mode Filter

Part Number	Z(Ω) at 100MHz		DCR Max. (m Ω)	I _{rated.} (A)	IR (M Ω) Min	Rated Voltage (V) Max
	Min	Typ.				
ACM7060□-400T150	40	70	5	15.0	10	125
ACM7060□-101T90	100	140	10	9.0	10	125
ACM7060□-301T50	225	300	10	5.0	10	125
ACM7060□-501T50	275	350	10	5.0	10	125
ACM7060□-701T40	500	700	15	4.0	10	125
ACM7060□-102T30	800	1020	17	3.0	10	125
ACM7060□-132T25	910	1300	21	2.5	10	80
ACM7060□-272T10	2000	2700	63	1.0	10	125
ACM7060□-302T09	2500	3000	75	0.9	10	125

III. ACM9070 Series Common Mode Filter

Part Number	Z(Ω) at 100MHz		DCR Max. (m Ω)	I _{rated.} (A)	IR (M Ω) Min	Rated Voltage (V) Max
	Min	Typ.				
ACM9070□-301T60	225	300	6	6.0	10	50
ACM9070□-501T55	450	600	8	5.5	10	50
ACM9070□-701T50	500	700	10	5.0	10	50
ACM9070□-102T40	750	1000	13	4.0	10	50
ACM9070□-222T25	1700	2200	60	2.5	10	50

IV. ACM1211 Series Common Mode Filter

Part Number	Z(Ω) at 100MHz		DCR Max. (m Ω)	I _{rated.} (A)	IR (M Ω) Min	Rated Voltage (V) Max
	Min	Typ.				
ACM1211□-800T100	80	230	2.0	10.0	10	125
ACM1211□-701T80	500	700	6.0	8.0	10	125
ACM1211□-801T80	600	800	8.0	8.0	10	125
ACM1211□-102T60	750	1000	14.0	6.0	10	125
ACM1211□-222T18	2200	2500	35.0	1.8	10	125
ACM1211□-272T15	2300	2700	50.0	1.5	10	125

IV. ACM1513 Series Common Mode Filter

Part Number	Z(Ω) at 100MHz		DCR Max. (m Ω)	I _{rated.} (A)	IR (M Ω) Min	Rated Voltage (V) Max
	Min	Typ.				
ACM1513□-301T130	250	300	5	13.0	10	80
ACM1513□-551T100	450	550	6	10.5	10	80
ACM1513□-701T100	500	700	7	10.0	10	80
ACM1513□-152T100	1100	1500	9	10.0	10	80

Products with other electrical characteristic can be provided upon customer's request. Please contact your local sales.

www.meledinc.com