


产品参数

间距: 5.08mm; 极数: 2P-12P; 额定电压/电流: 300V/10A

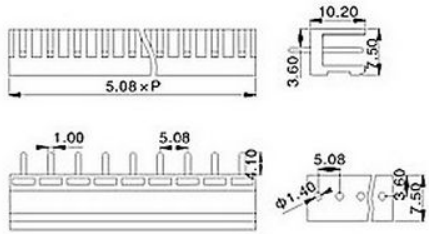

材质及电镀

间距: 5.08mm  
极数: 2P-12P  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

MATERIAL

Pitch: 5.08mm  
Poles: 2P-12P  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

电气性能

额定电压: 300V  
额定电流: 10A  
耐电压: AC1500V/1Min

ELECTRICAL

rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC1500V/1Min

机械性能

温度范围: -40°C~+105°C  
瞬时温度: +250°C5秒

MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: +250°C for 5 secretary.

产品图片

