

# BAV23A/C/S

Rev.F Mar.-2016

DATA SHEET

## 描述 / Descriptions

SOT-23 塑封封装 硅半导体二极管。Silicon Diode in a SOT-23 Plastic Package.


## 特征 / Features

小信号二极管。  
 Small signal diode.

## 用途 / Applications

开关速度快，开关应用通用，高电导率。  
 Switching speed, general-purpose switching applications, high conductivity.

## 内部等效电路 / Equivalent Circuit

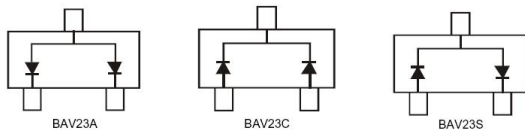

## 引脚排列 / Pinning



PIN: See Equivalent Circuit.

## 放大及印章代码 / $h_{FE}$ Classifications & Marking

Model	BAV23A	BAV23C	BAV23S
Marking	HT7	HT6	HT5





**极限参数 / Absolute Maximum Ratings(Ta=25°C)**

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Repetitive Reverse Voltage	$V_{RRM}$	250	V
Reverse Voltage	$V_R$	200	V
Working Peak Reverse Voltage	$V_{RWM}$		
RMS Reverse Voltage	$V_{R(RMS)}$	141	V
Average Rectified Forward Current	$I_{FM}$	400	mA
Non-repetitive Peak Forward Surge Current	$I_{FSM(1)}$ (pulse width=1.0 uS )	9.0	A
	$I_{FSM(2)}$ (pulse width=100uS)	3.0	A
	$I_{FSM(3)}$ (pulse width=10ms)	1.7	A
Repetitive Peak Forward Surge Current	$I_{FRM}$	625	mA
Power Dissipation	$P_D$	350	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	357	°C/W
Junction and Storage Temperature Range	$T_j, T_{stg}$	-65~150	°C

**电性能参数 / Electrical Characteristics(Ta=25°C)**

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Breakdown Voltage	$V_R$	$I_R=100\mu A$	250			V
Forward Voltage	$V_F$	$I_F=100mA$			1.0	V
		$I_F=200mA$			1.25	V
Instantaneous Reverse Current	$I_R$	$T_J=25^\circ C$			100	nA
		$T_J=150^\circ C$			100	$\mu A$
Total Capacitance	$C_T$	$V_R=0$ $f=1.0MHz$			5.0	pF
Reverse Recovery Time	$t_{rr}$	$I_F=I_R=30mA$ $I_{RR}=0.1 \times I_R$ $R_L=100\Omega$			50	ns


**电参数曲线图 / Electrical Characteristic Curve**

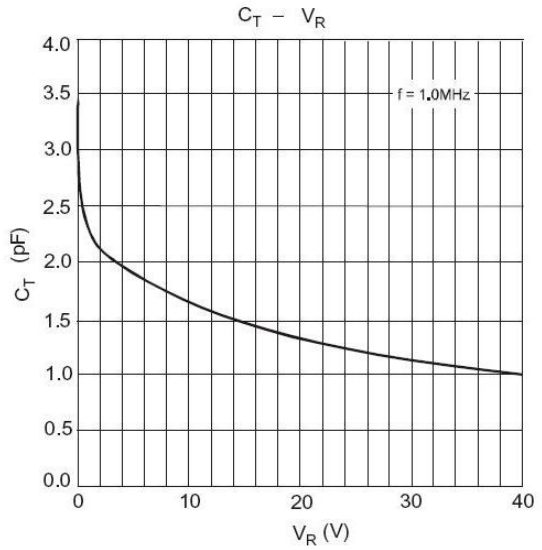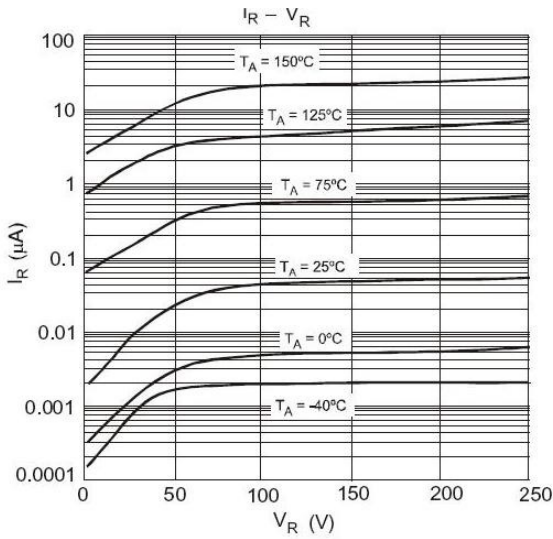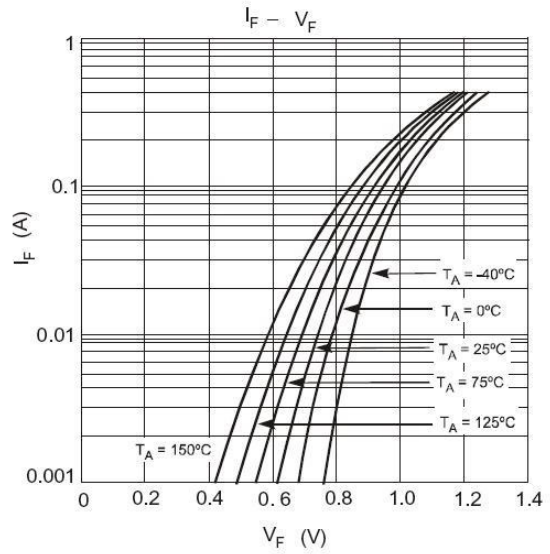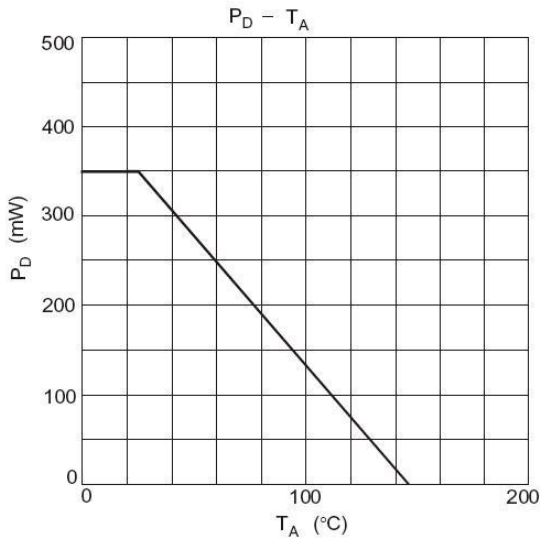


**外形尺寸图 / Package Dimensions**

SOT-23

单位: mm

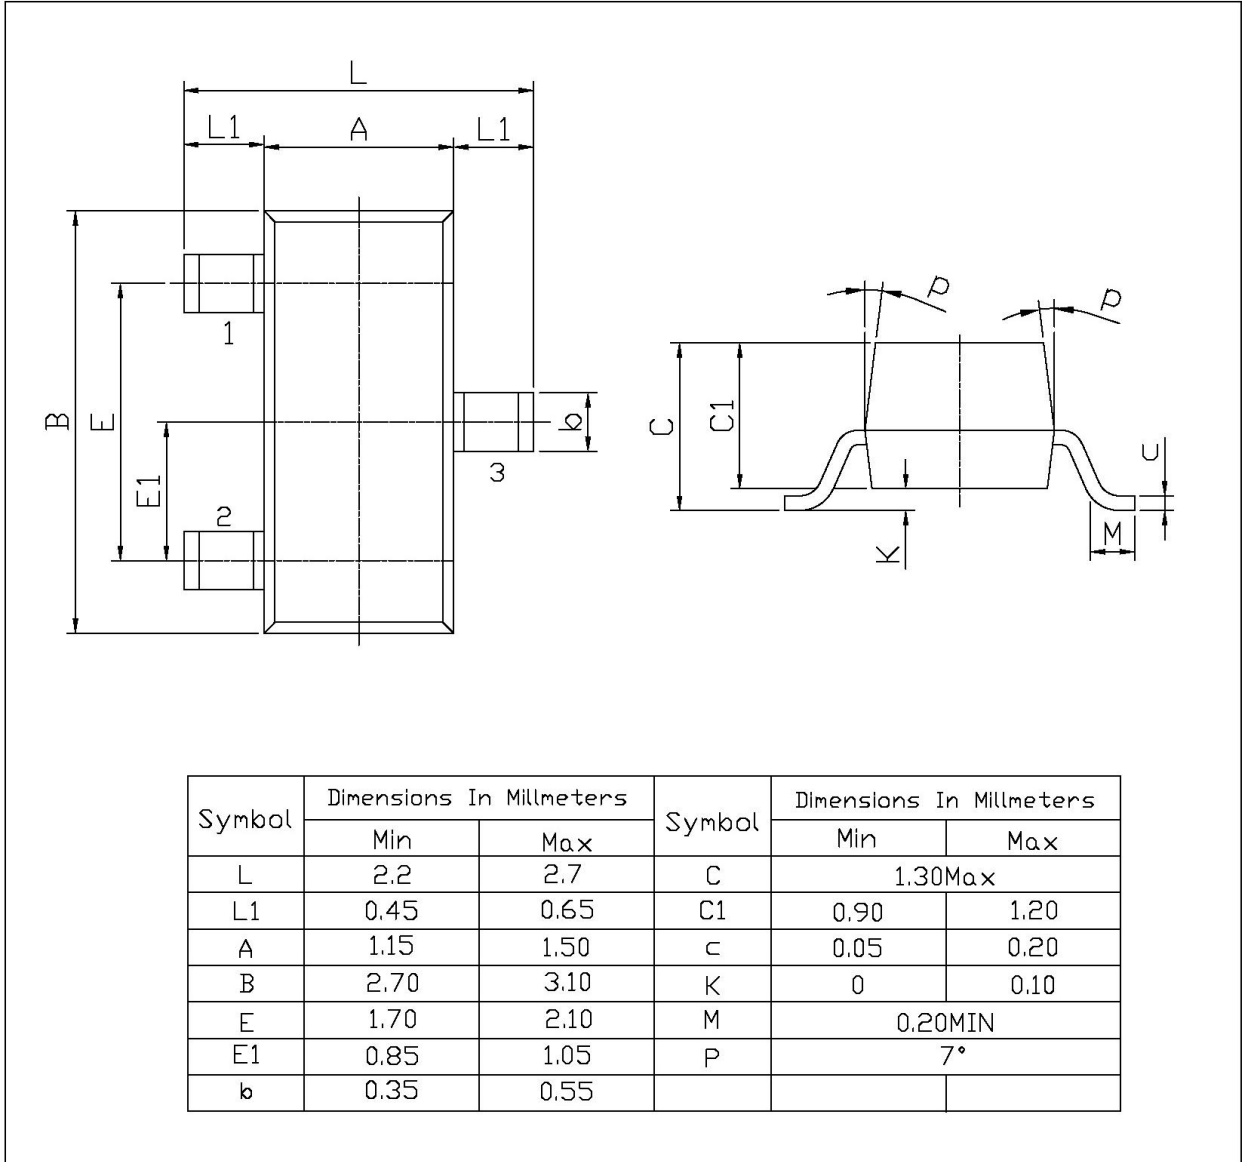

**印章说明 / Marking Instructions**

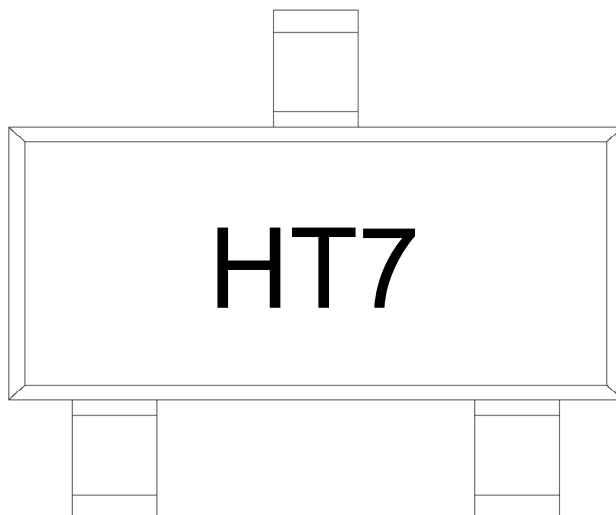

说明：

H： 为公司代码


T7： 为型号代码

Note:

H: Company Code.

T7: Product Type.

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

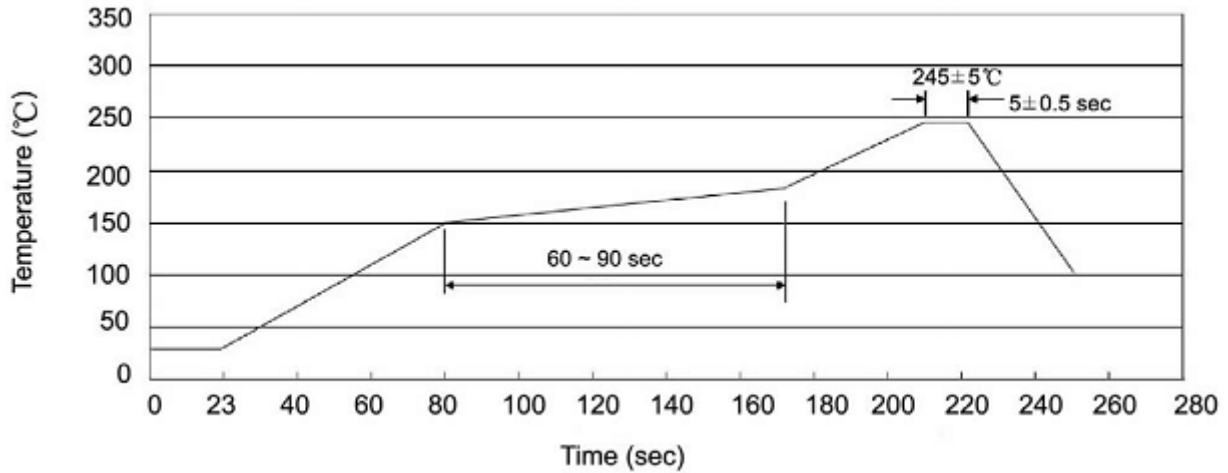

说明：

- 1、预热温度 25~150°C，时间 60~90sec;
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm <sup>3</sup> )		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	8	240,000	7" ×8	180×120×180	385×257×392

使用说明 / Notices