
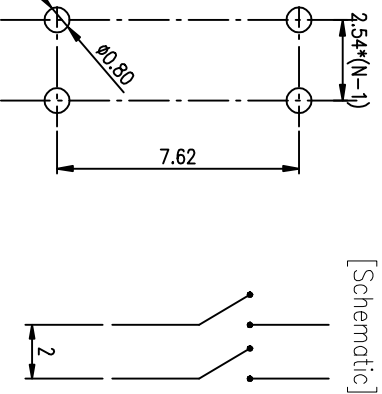


PRODUCT NO.	DSPV02LHGCT
RoHS compliant	

NOTES : 1 Specification:
 1>.Operating force:10000gf Max
 2>.Operating Temperature: -40° to+85°
 3>.Storage Temperature: -40° to+85°
 4>.Mechanical Life:3000cycles minimum
 5>Electrical Life:2000cycles minimum

REV.	ECN NO.	DR	DATE

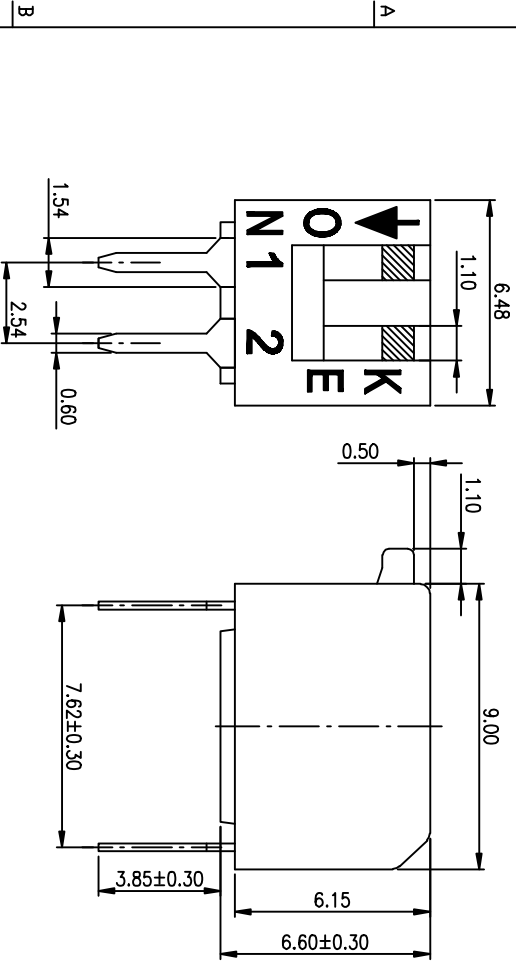

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)




Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3μ' Gold
④	Terminal	Brass	1μ' Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3μ' Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0 ± 2'		
.00 ± 0.15	.0 ± 1'		
.000± 0.10	.00± 0.5'		
DESIGN	kathy	03/20/12'	
DRAWING			
CHECK			
APPRO.			

FILE NO.	DSPV02LHGCT-A
SIZE	A4
UNIT	mm
SCALE	2 : 1
SHEET	1 OF 1
REV.	A

4. PART NUMBER DESCRIPTION :
- DS XX I S G E T
 - [Packing: T=Tube R=Reel]
 - [Finish: E=3μ' Gold-plated F=10μ' Gold-plated]
 - [Finish: G=Full Gold S=Contact-Gold-plated]
 - [Terminal: S=SMD type H=Straight.....]
 - [Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]
 - [HP=Half-Pitch IC=IC type PV=Plano type]
3. CONTACT RATING:
1. SWITCHING: 25mA at 24VDC
 2. NON-SWITCHING: 100mA at 50VDC WITH 50u" NICKEL UNDERPLATINGOVERALL.



东莞市 Kingtek 实业有限公司
 Dongguan Kingtek Industrial Co., Ltd.

BY DSPV SERIES PITCH 2.54mm
 PRODUCT FAMILY DSPV SERIES
 PRAT NO. DSPV02LHGCT