


Model(型號): DS-04-R-T 2.54mm 4POS DIP


KE Switches



※ Features:

- ▶ Lowest contact resistance less than 50mΩ.
- ▶ Gold-plated contact provides high reliability.
- ▶ All materials are UL 94V0 grade, high temperature resistant plastic.
- ▶ All DIP switches Packaging are IC TUBES and the switches are OFF state.
- ▶ Shell colour: Red or Blue or Black.

※ Dimensions(規格圖): DS Series

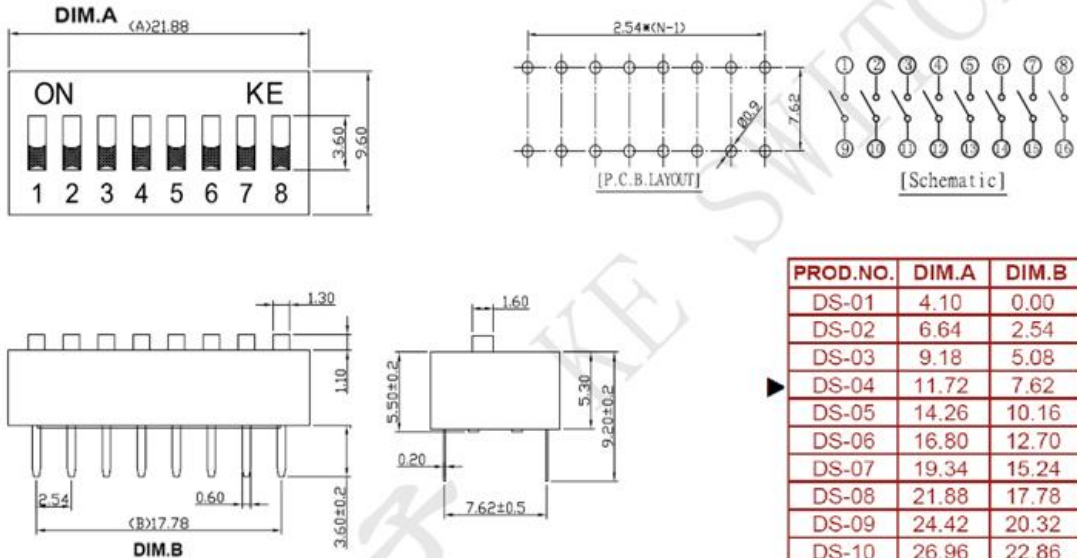

PROD.NO.	DIM.A	DIM.B
DS-01	4.10	0.00
DS-02	6.64	2.54
DS-03	9.18	5.08
DS-04	11.72	7.62
DS-05	14.26	10.16
DS-06	16.80	12.70
DS-07	19.34	15.24
DS-08	21.88	17.78
DS-09	24.42	20.32
DS-10	26.96	22.86
DS-12	32.04	27.94

※ Specifications(規格)

● Electrical Characteristics [ 電氣性能 ]	
Positions [ 位數 ]	▶ <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input checked="" type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 12
Contact Rating [ 触点容量 ]	▶ Switching: DC24V 25mA Non-Switching: DC50V 100mA
Contact resistance [ 接觸阻抗 ]	▶ 50mΩ Max at initial ; 100mΩ Max after life test
Insulation resistance [ 絕緣阻抗 ]	▶ 1000MΩ Min at DC500V
Dielectric strength [ 耐電壓 ]	▶ 1 minute at AC 500VAC
Wave soldering [ 波峰焊 ]	▶ 255±5°C for 3----5 Seconds
● Mechanical Characteristics [ 機械性能 ]	
Circuit [ 開關形式 ]	▶ SPST
Operation force [ 動作力 ]	▶ 1000gf Max
Operating Temperature Range [ 工作溫度範圍 ]	▶ -30°C~85°C
Storage Temperature Range [ 儲存溫度範圍 ]	▶ -40°C~85°C
Packing Specifications [ 包裝規格 ]	▶ 42 PCS / Tube, 2100 PCS / Box
● Endurance Characteristics [ 耐久性能 ]	
Mechanical life [ 機械壽命 ]	▶ 3,000 Cycles Operations