


Model(型號): DS-06-R-T 2.54mm 6POS DIP


KE Switches



※ Features:

- ▶ Lowest contact resistance less than 50mΩ.
- ▶ Gold-plated contact provides high reliability.
- ▶ All materials are UL 94V0 grade, high temperature resistant plastic.
- ▶ All DIP switches Packaging are IC TUBES and the switches are OFF state.
- ▶ Shell colour: Red or Blue or Black.

※ Dimensions(規格圖): DS Series

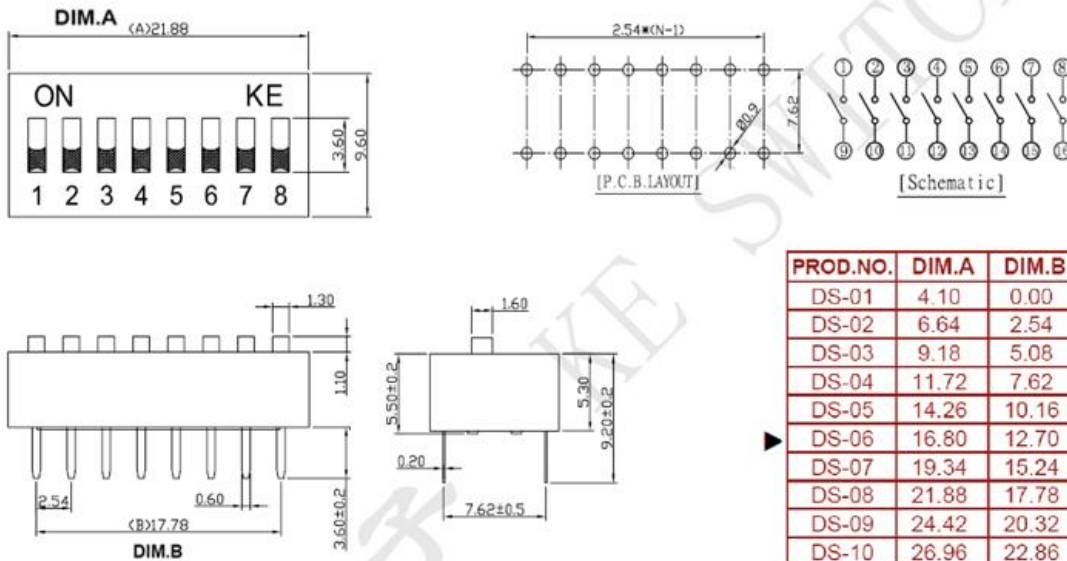

※ Specifications(規格)

| ● Electrical Characteristics [電氣性能] | |
|--|---|
| Positions [位數] | ▶ <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input checked="" type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 12 |
| Contact Rating [触点容量] | ▶ Switching: DC24V 25mA Non-Switching: DC50V 100mA |
| Contact resistance [接觸阻抗] | ▶ 50mΩ Max at initial ; 100mΩ Max after life test |
| Insulation resistance [絕緣阻抗] | ▶ 1000MΩ Min at DC500V |
| Dielectric strength [耐電壓] | ▶ 1 minute at AC 500VAC |
| Wave soldering [波峰焊] | ▶ 255±5℃ for 3----5 Seconds |
| ● Mechanical Characteristics [機械性能] | |
| Circuit [開關形式] | ▶ SPST |
| Operation force [動作力] | ▶ 1000gf Max |
| Operating Temperature Range [工作溫度範圍] | ▶ -30℃~85℃ |
| Storage Temperature Range [儲存溫度範圍] | ▶ -40℃~85℃ |
| Packing Specifications [包裝規格] | ▶ 29 PCS / Tube, 1450 PCS / Box |
| ● Endurance Characteristics [耐久性能] | |
| Mechanical life [機械壽命] | ▶ 3,000 Cycles Operations |

Http://www.ksswitch.com

Email:kswitch@126.com

TEL:(86)0769-82633166

FAX:(86)0769-82633255