ROHS

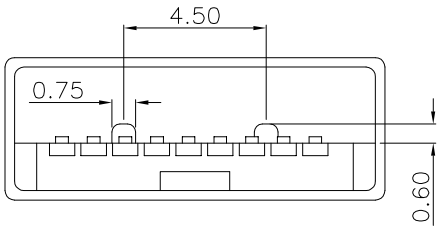

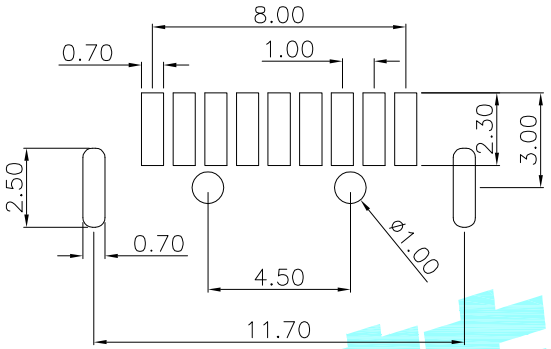

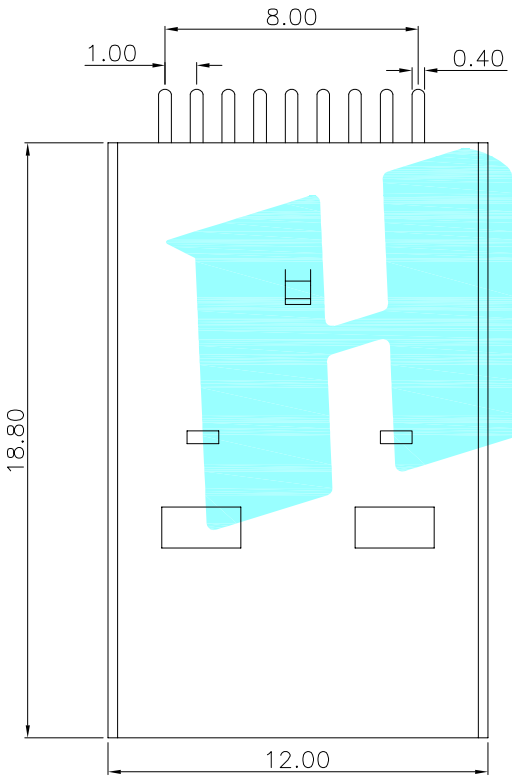

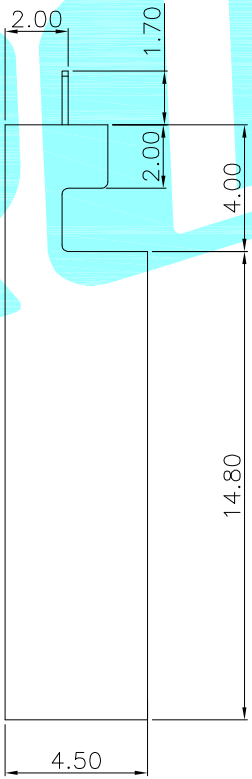

SPECIFICATIONS

1.Rating : DC 30V 1.5A

2.Contact Resistance: ≤50mΩ

3.Lnsulation Resistance:
≥1000mΩ Min DC250V

4.Operating Temperature Range:
-40℃+85℃

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	——	1	SPCC		——
②	Contact	——	4	BRASS		——
①	Housing	——	1	PBT	Black/White	——

APPROVALS		DATE	HRO韩京® ELECTRONICS CO.,LTD
DRAWN	QFENG.XU	2014/6/17	
CHECKED			TITLE: USB CONNECTOR
APPROVALS			PART NO.

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以上	±0.30				
	10~30	±0.25				
	5~10	±0.20	±2°	DRAWING NO.	——	SHEET 1 OF 1
	~ 5	±0.15				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——