

**TRENCH SCHOTTKY RECTIFIER**

**REVERSE VOLTAGE** – 60 Volts  
**FORWARD CURRENT** – 30 Amperes


**FEATURES**

- Trench Schottky technology
- Low power loss, high efficiency
- Low forward drop voltage
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection application

**MECHANICAL DATA**


- Case: ITO-220AB molded plastic
- Case Material: "Green" Molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl.) "Halogen-free".
- Maximum mounting torque = 0.5 N.m(5.1 Kgf.cm)
- Lead free finish, RoHS compliant
- Polarity : As marked on body
- Marking position: Any
- Weight: 0.05ounces, 1.558 grams (Approximate)
- Marking code:G3060CTFW

**ITO-220AB(W/B)**

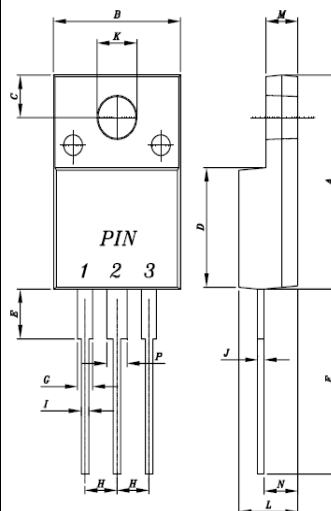

ITO-220AB(W/B)		
DIM	MIN	MAX
A	14.95	15.95
B	10.00	10.40
C	2.76	3.36
D	8.50	8.80
E	3.30	3.90
F	13.0	13.70
G	1.15	1.70
H	2.40	2.70
I	0.50	0.80
J	0.45	0.70
K	3.00	3.30
L	4.46	4.87
M	2.48	2.80
N	2.50	2.80
P	1.50	1.90

All dimension in millimeter



**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

**ABSOLUTE RATINGS**

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	60	V
Maximum DC blocking voltage	$V_{DC}$	60	V
Maximum Average rectified forward current	$I_{AV}$	30	A
Peak forward surge 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	250	A
Operating and Storage temperature range	$T_J, T_{STG}$	-55 ~ +150	°C

**STATIC ELECTRICAL CHARACTERISTICS**

PARAMETER	TEST CONDITION	SYMBOL	TYP	MAX	UNIT
Forward voltage (Note 1)	$I_F = 15A$ $T_J = 25^\circ C$ $T_J = 125^\circ C$	$V_F$	0.53 0.49	0.58 0.55	V
Reverse leakage current	$V_R = 60V$ $T_J = 25^\circ C$ $T_J = 125^\circ C$	$I_R$	-- --	500 55	uA mA
Typical junction capacitance (Note 2)		$C_J$		950	pF

**THERMAL CHARACTERISTICS**

PARAMETER	SYMBOL	TYP	UNIT
Typical thermal resistance (Note 3)	$R_{thJc}$	1	°C/W


**Note :**

- (1) 300us pulse width, 2% duty cycle
- (2) Measured at 1.0MHz and applied reverse voltage of 4.0 VDC
- (3) Thermal Resistance test performed in accordance with JESD-51.


# RATING AND CHARACTERISTIC CURVES C3060CTFW




**FIG.1- FORWARD CURRENT DERATING CURVE**

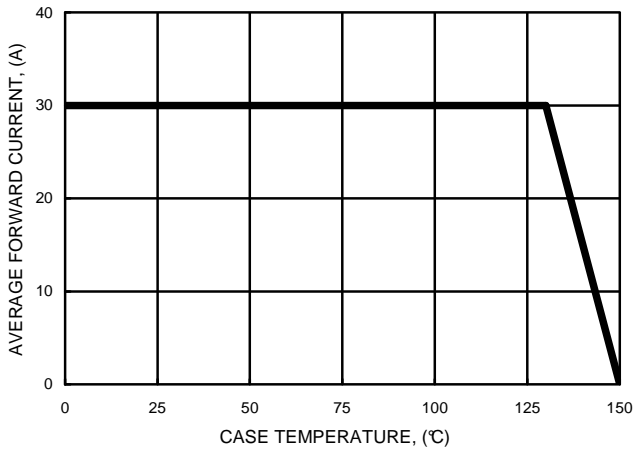


**FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT**

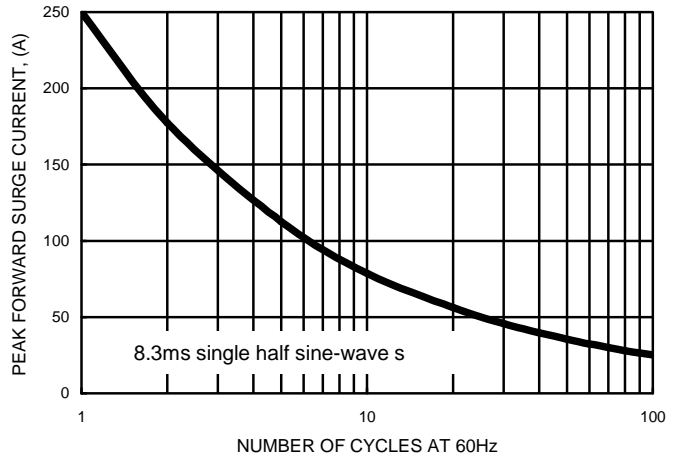


**FIG.3- TYPICAL FORWARD CHARACTERISTICS**

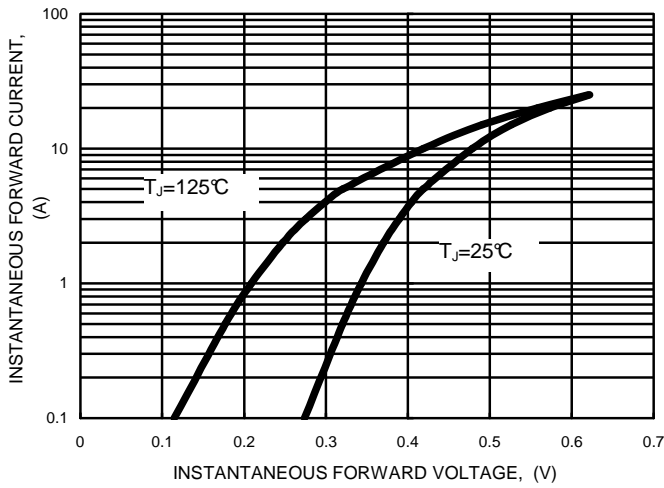

**FIG.4- TYPICAL JUNCTION CAPACITANCE**

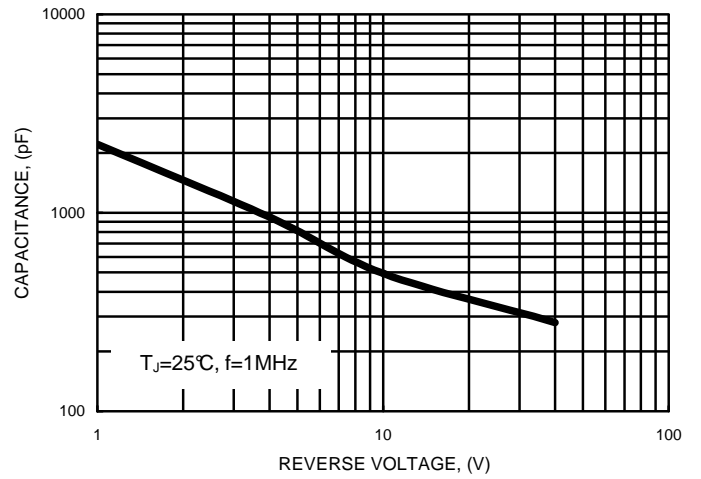

**FIG.5- TYPICAL REVERSE CHARACTERISTICS**

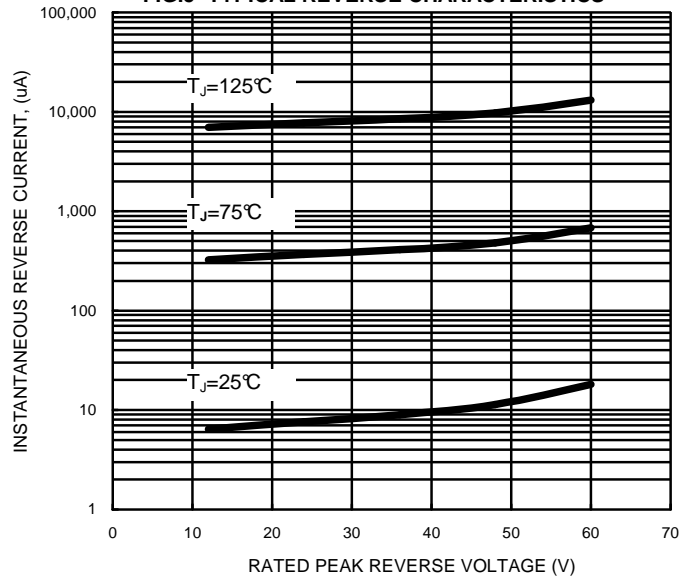

## **Important Notice and Disclaimer**

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.