



RECOMMENDED P.C.BOARD LAYOUT(TOP VIEW)  
GENERAL TOLERANCE:±0.05

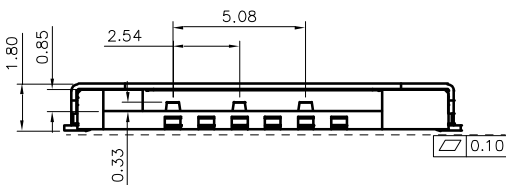

-NOTE-

- \*Electrical Characteristics:  
Contact Current Rating:0.5 Amperes.  
Dielectric Withstanding Voltage:AC500V r.m.s.  
Insulation Resistance:1000 MΩ Minimum.  
Contact Resistance:40 mΩ Maximum.
- \*Environmental:  
Operating Temperature:-25°C+90°C.
- \*Environmental:  
Mating Cycles:3,000 Insertions.
- \*Mechanical Characteristics:  
Card Push Insertion/Out Force:0.7N±0.20kgf.  
Contact Separation Force:0.20kgf Minimum.
- \*Material:  
Insulator:HI-Temp Plastic UL 94V-0 Rated.  
Contact:Copper Alloy(t=0.15mm).  
Shell:Stainless Steel(t=0.15mm).

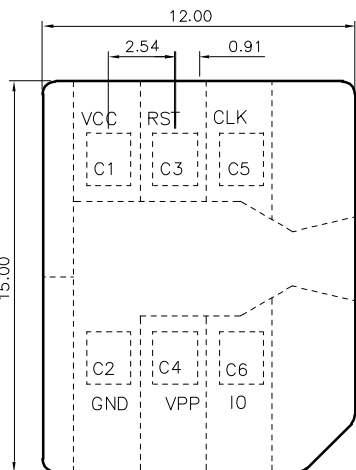

3	TERMINAL	6	COOPER ALLOY	CONTACT Au OVER ALL:
2	SHELL	1	STAINLESS STEEL	
1	HOUSING	1	THERMOPLASTIC	UL 94V-0
NO.	DESCRIPTION	QTY	MATERIAL	NOTE

UNLESS OTHERWISE SPECIFIED TOLERANCE				东莞市讯普电子科技有限公司 www.xunpudianzi.com	
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2014/12/12	DRAWN NAME:		
CHECKED	Ron	2014/12/12	MICRO SIM CONNECTOR		
APPROVED	Albert	2014/12/12	PRODUCT NO.	SMC-216	
SCALE 3.2		SHEET 1/3	SIZE A4		