

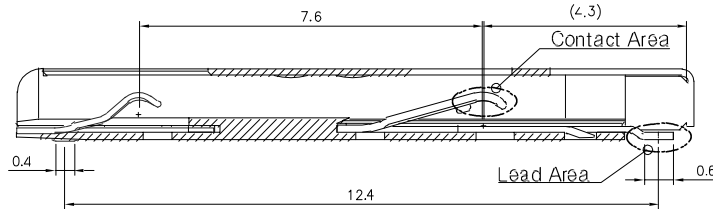
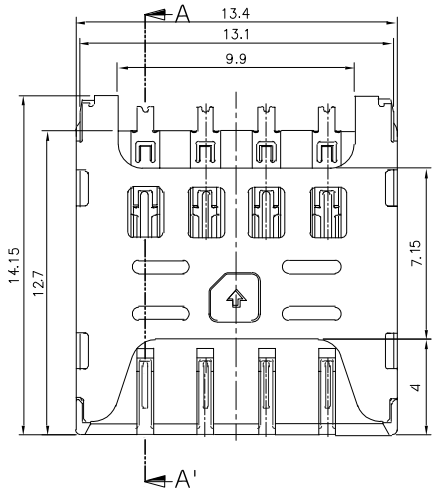
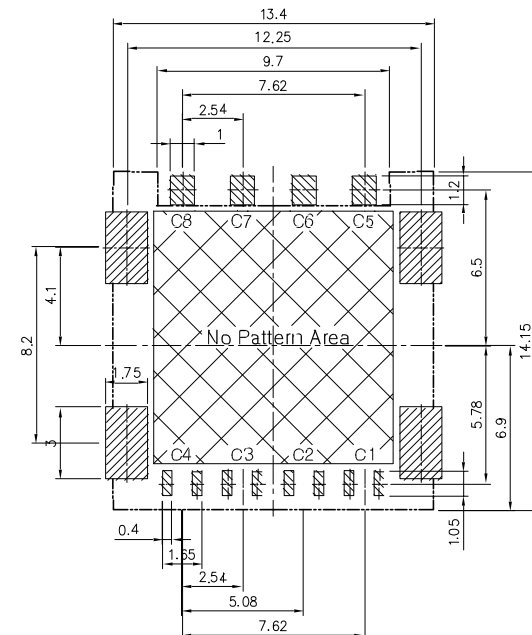


Specification




- *Electrical Characteristics:
 Contact Current Rating: 0.5 Amperes,
 Dielectric Withstanding Voltage: AC500V r.m.s.
 Insulation Resistance: 500 MΩ Minimum.
 Contact Resistance: 30 mΩ Maximum.
- *Environmental:
 Operating Temperature: 30 °C ~ + 85 °C.



SECT ON A-A' (ZOOM VIEW)

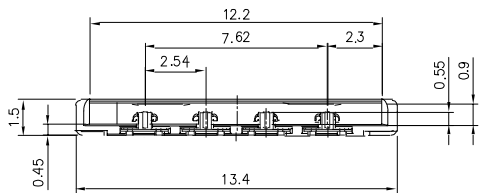

P.C.B LAYOUT (Top View)
(General Tolerance +0.05)

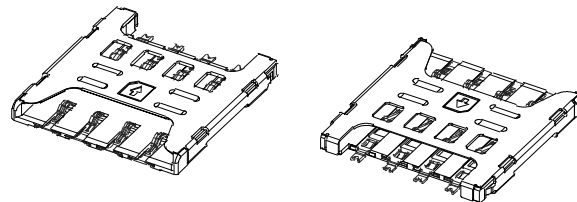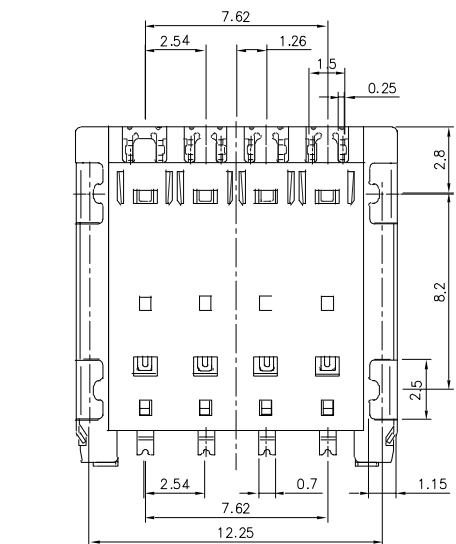

Insert Micro US M CARD

P/N No	Description
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

UNLESS OTHERWISE SPECIFIED TOLERANCE				东莞市讯普电子科技有限公司 www.xunpudianzi.com
UNIT:	DECIMAL	LINEAR	ANGLES	
mm	X.	±0.50	±5°	
	X.X	±0.25	±3°	
	X.XX	±0.12	±1°	
DRAWN	Fros	2014/12/12	DRAWN NAME:	
CHECKED	Ron	2014/12/12	MICRO SIM CONNECTOR	
APPROVED	Albert	2014/12/12	PRODUCT NO.	
SCALE 3.2 SHEET 1/1 SIZE A4			SMC-218	